



**MINMAX<sup>®</sup>**

MJWI25 Series


Electric Characteristic Note

# MJWI25 Series EC Note

DC-DC CONVERTER 25W, Highest Power Density

## Features

- ▶ Smallest Encapsulated 25W Converter
- ▶ Ultra-compact 1" X 1" Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ Excellent Efficiency up to 90%
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ No Min. Load Requirement
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Remote On/Off Control, Output Voltage Trim
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval & CE Marking

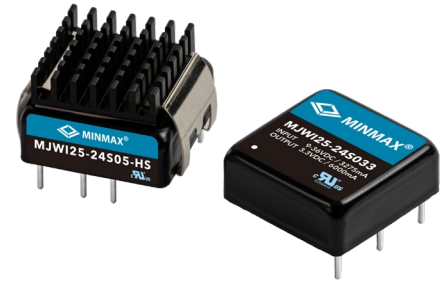

## Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

## Product Overview

The MINMAX MJWI25 series is the latest range of a new generation of high performance DC-DC converter modules with very high power density. The product offers fully 25W in a shielded metal package with dimensions of just 1.0"x1.0"x0.4". All models provide ultra-wide 4:1 input range and tightly regulated output voltage. State-of-the-art circuit topology provides a very high efficiency up to 90% which allows an operating temperature range of -40°C to +80°C. These converters are qualified for demanding applications in battery operated equipment, instrumentation, data communication, industrial and many other space critical applications.

## Table of contents

Model Selection Guide .....	P2	External Output Trimming.....	P18
Input Specifications.....	P2	Test Setup.....	P19
Remote On/Off Control .....	P2	Technical Notes .....	P19
Output Specifications.....	P3	Remote On/Off Implementation.....	P20
General Specifications.....	P3	Packaging Information for Tube .....	P20
EMC Specifications.....	P3	Wave Soldering Considerations .....	P21
Environmental Specifications .....	P4	Hand Welding Parameter .....	P21
Characteristic Curves .....	P5	Part Number Structure .....	P22
Package Specifications .....	P17	MTBF and Reliability .....	P22
Recommended Pad Layout for Single & Dual Output Converter.....	P18		

**Model Selection Guide**

Model Number	Input Voltage (Range)	Output Voltage	Output Current Max.	Input Current		Reflected Ripple Current	Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
				@Max. Load	@No Load				@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	mA (typ.)	VDC	μF	%
MJWI25-24S033	24 (9 ~ 36)	3.3	6000	950	85	50	3.9	10300	87
MJWI25-24S05		5	5000	1170	85		6.2	6800	89
MJWI25-24S12		12	2090	1175	85		15	1200	89
MJWI25-24S15		15	1670	1160	85		18	750	90
MJWI25-24D12		±12	±1040	1170	85		±15	680#	89
MJWI25-24D15		±15	±840	1180	85		±18	380#	89
MJWI25-48S033	48 (18 ~ 75)	3.3	6000	470	45	30	3.9	10300	88
MJWI25-48S05		5	5000	580	45		6.2	6800	90
MJWI25-48S12		12	2090	580	45		15	1200	90
MJWI25-48S15		15	1670	580	45		18	750	90
MJWI25-48D12		±12	±1040	585	45		±15	680#	89
MJWI25-48D15		±15	±840	590	45		±18	380#	89

# For each output

**Input Specifications**

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (100ms max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	---	---	9	
	48V Input Models	---	---	18	
Start Up Time	Power Up	---	---	30	ms
	Remote On/Off	---	---	30	ms
Input Filter	All Models	Internal LC Type			

**Remote On/Off Control**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	---	---	0.5	mA
Control Input Current (off)	Vctrl = 0V	---	---	-0.5	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	---	3	---	mA

Output Specifications						
Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy			---	---	±1.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads		---	---	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load		---	---	±0.2	%
Load Regulation	Io=0% to 100%	Single Output	---	---	±0.2	%
		Dual Output	---	---	±1.0	%
Cross Regulation (Dual)	Asymmetrical load 25% / 100% FL		---	---	±5.0	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	3.3V & 5V Models	---	---	100	mV <sub>P-P</sub>
		12V, 15V & Dual Models	---	---	150	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change		---	250	---	µsec
Transient Response Deviation			---	±3	±5	%
Temperature Coefficient			---	---	±0.02	%/°C
Trim Up / Down Range (See Page 18)	% of Nominal Output Voltage		---	---	±10	%
Over Load Protection	Hiccup		---	150	---	%
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.6Hz typ.)					

General Specifications						
Parameter	Conditions		Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds		1500	---	---	VDC
	1 Second		1800	---	---	VDC
I/O Isolation Resistance	500 VDC		1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V		---	---	2000	pF
Switching Frequency			---	285	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign		444,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-report)					
	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report)					

EMC Specifications				
Parameter	Standards & Level			Performance
EMI <sub>(6)</sub>	Conduction	EN 55032	With external components	Class A
	Radiation			
EMS <sub>(6)</sub>	EN 55035			
	ESD	EN 61000-4-2 Air ± 8kV, Contact ± 6kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A


Environmental Specifications					
Parameter	Conditions/Model	Min.	Max.		Unit
			without Heatsink	with Heatsink	
Operating Ambient Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MJWI25-48S033	-40	57	65	°C
	MJWI25-24S15, MJWI25-48S05 MJWI25-48S12, MJWI25-48S15		56	64	
	MJWI25-24S033		53	61	
	MJWI25-24S05, MJWI25-24S12 MJWI25-24D12, MJWI25-24D15 MJWI25-48D12, MJWI25-48D15		50	59	
Thermal Impedance	20LFM Convection without Heatsink	17.6	---	---	°C/W
	20LFM Convection with Heatsink	14.8	---	---	°C/W
	100LFM Convection without Heatsink	13.6	---	---	°C/W
	100LFM Convection with Heatsink	8.5	---	---	°C/W
	200LFM Convection without Heatsink	11.8	---	---	°C/W
	200LFM Convection with Heatsink	6.5	---	---	°C/W
	400LFM Convection without Heatsink	8.8	---	---	°C/W
	400LFM Convection with Heatsink	4.3	---	---	°C/W
Case Temperature		---	+105	---	°C
Storage Temperature Range		-50	+125	---	°C
Humidity (non condensing)		---	95	---	% rel. H
RFI	Six-Sided shielded, Metal Case				
Lead Temperature (1.5mm from case for 10Sec.)		---	260	---	°C

**Notes**


- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement with a 1µF/25V MLCC and a 10µF/50V Tantalum Capacitor.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact MINMAX.
- 6 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 7 Specifications are subject to change without notice.
- 8 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-24S033

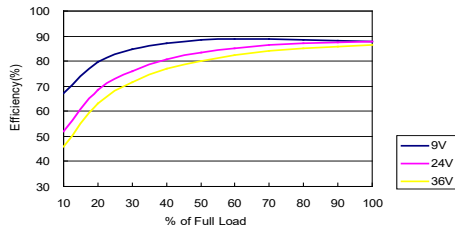


Efficiency Versus Output Current

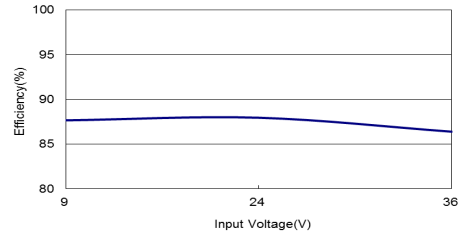


Efficiency Versus Input Voltage Full Load

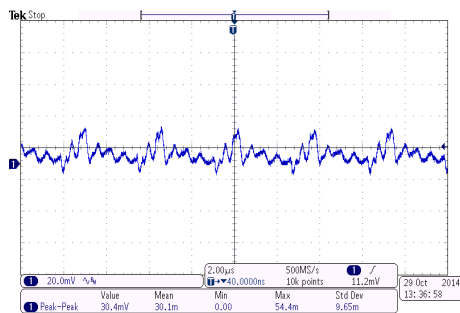


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

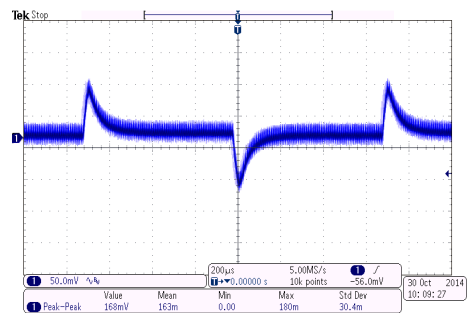


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

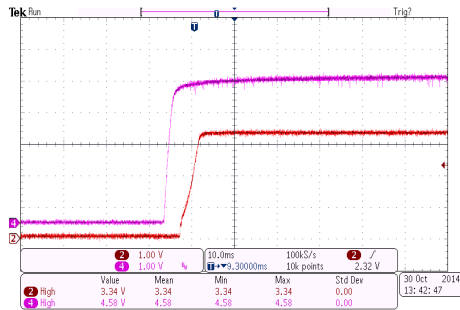

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

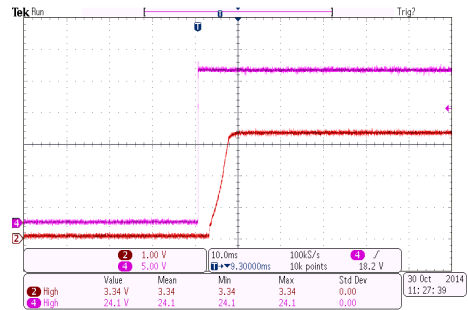


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

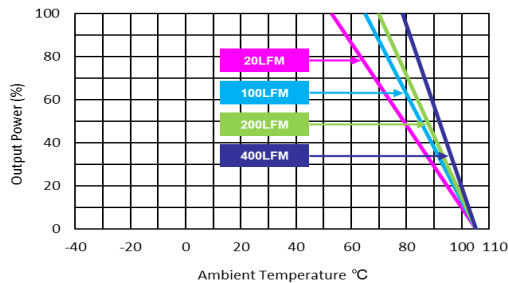


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-24S05

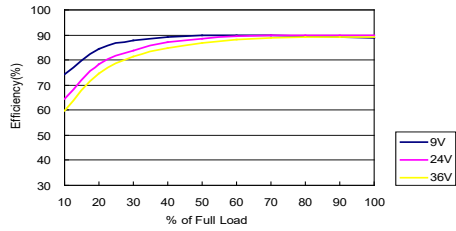


Efficiency Versus Output Current

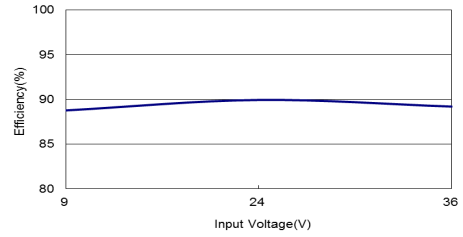


Efficiency Versus Input Voltage Full Load

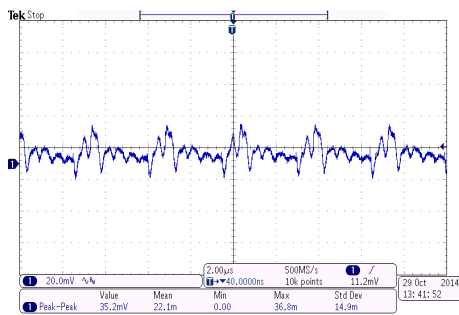


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

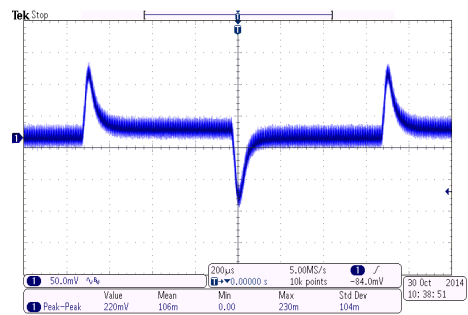


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

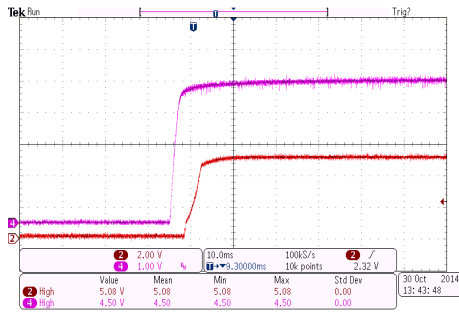

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

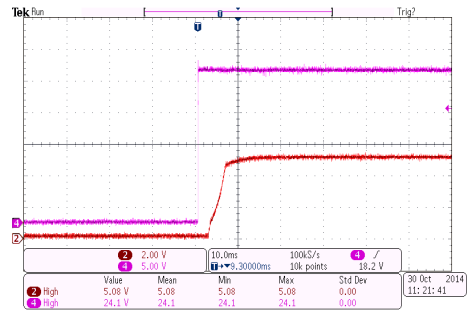


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

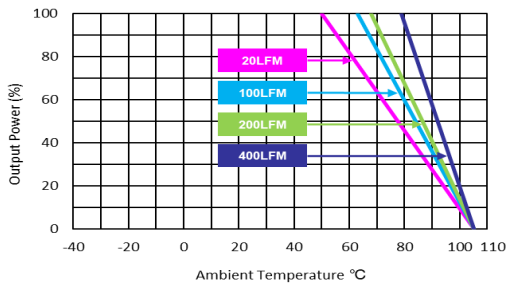


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-24S12

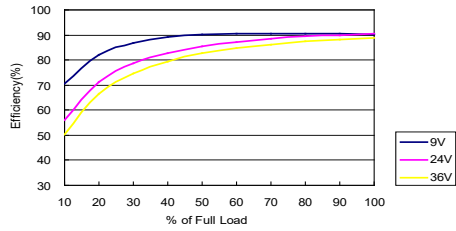


Efficiency Versus Output Current

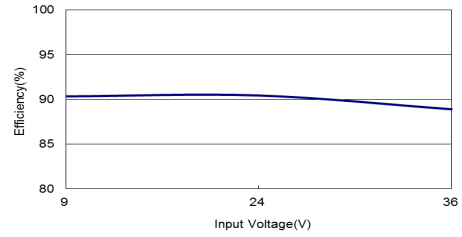


Efficiency Versus Input Voltage Full Load

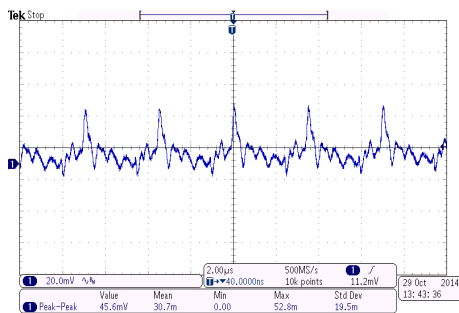


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

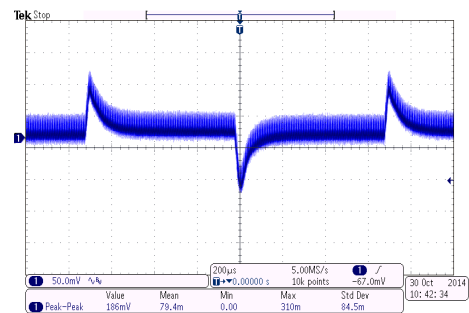


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

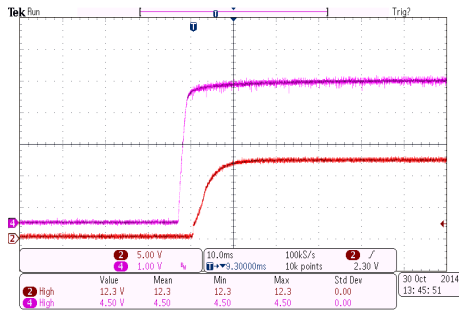

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

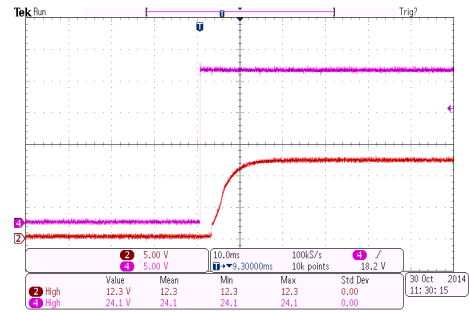

ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

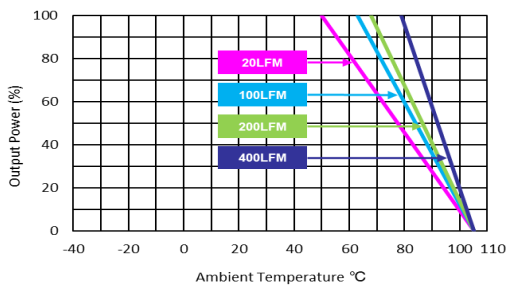


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$




**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-24S15

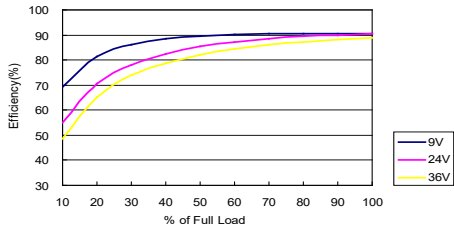


Efficiency Versus Output Current

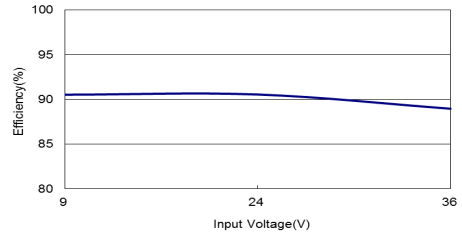


Efficiency Versus Input Voltage Full Load

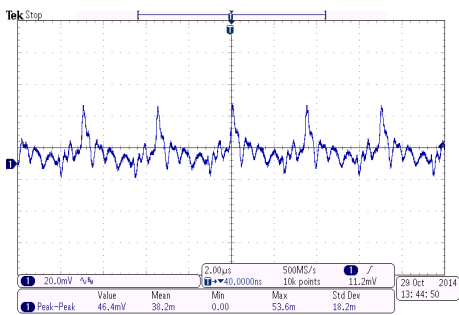


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

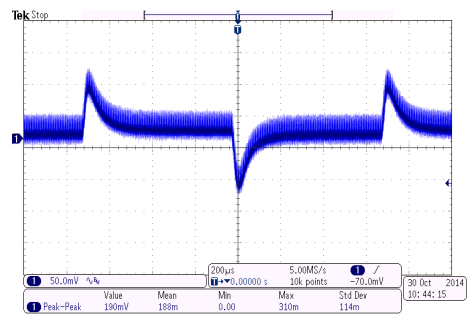


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

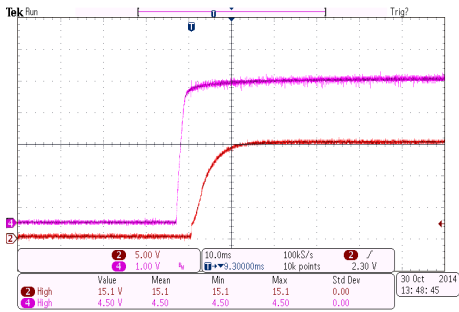

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

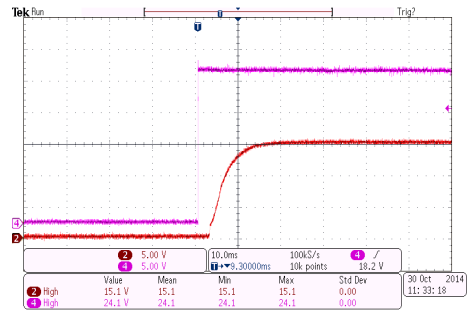


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

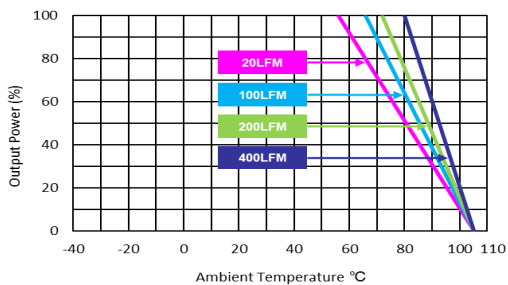


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-24D12

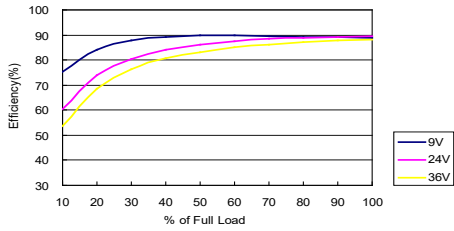


Efficiency Versus Output Current

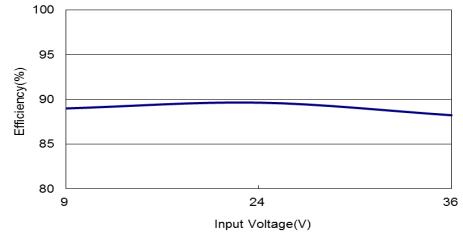


Efficiency Versus Input Voltage Full Load

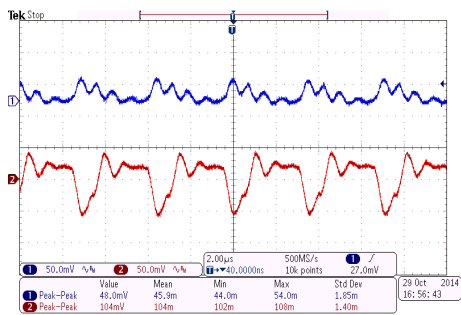


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

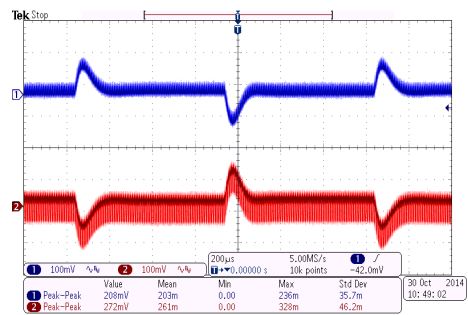


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

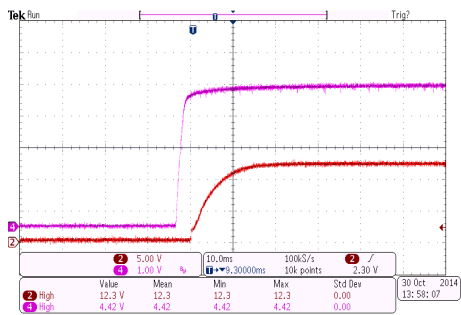

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

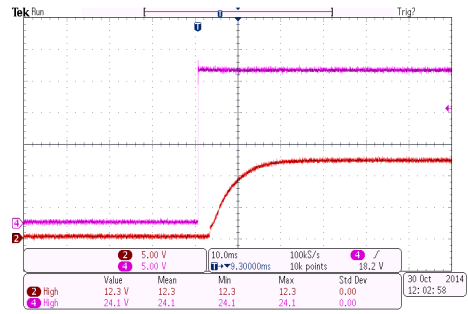


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

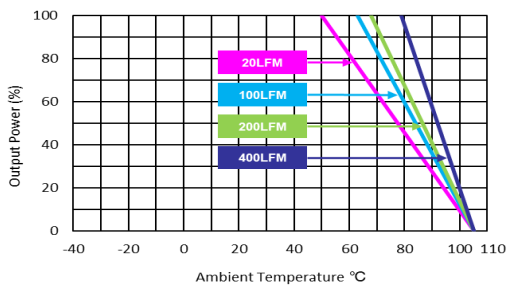


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-24D15

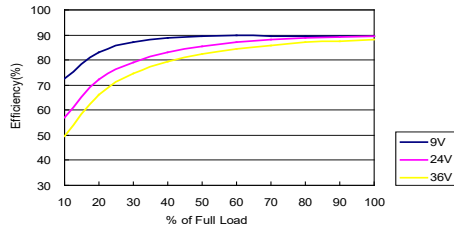


Efficiency Versus Output Current

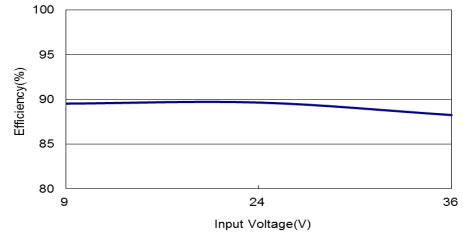


Efficiency Versus Input Voltage Full Load

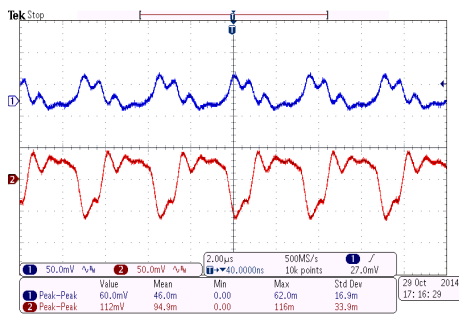


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

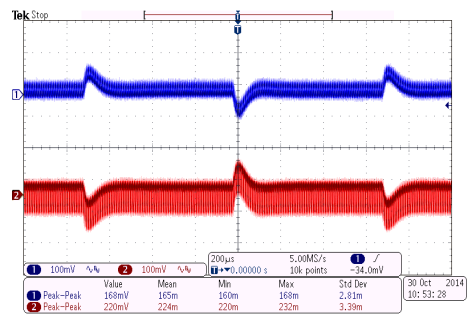


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

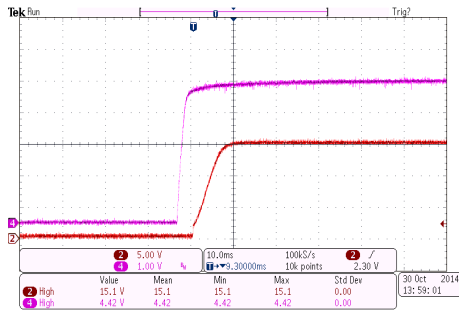

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

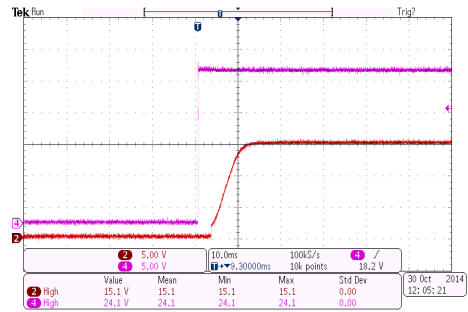


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

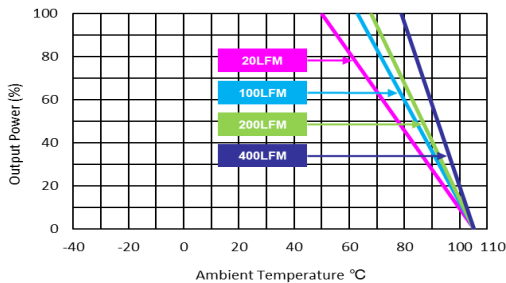


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-48S033

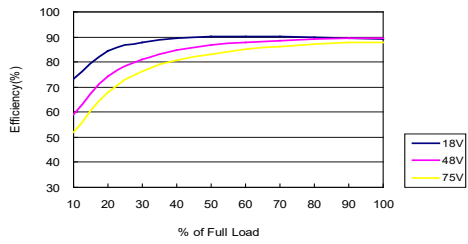


Efficiency Versus Output Current

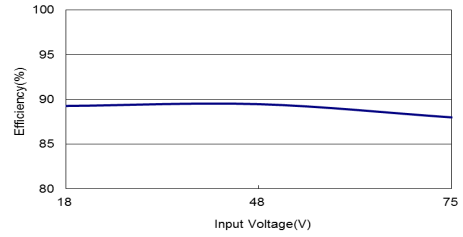


Efficiency Versus Input Voltage Full Load

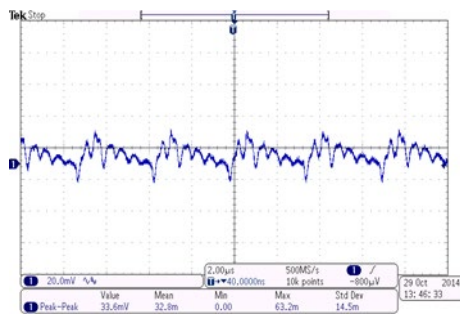


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

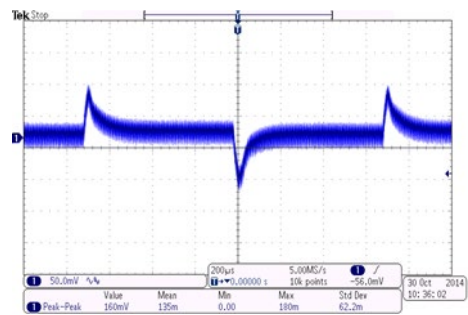


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

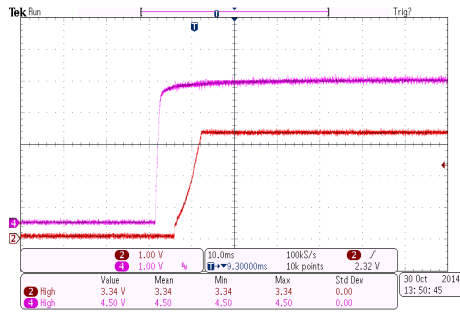

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

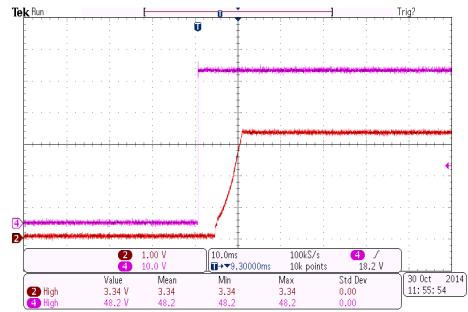


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

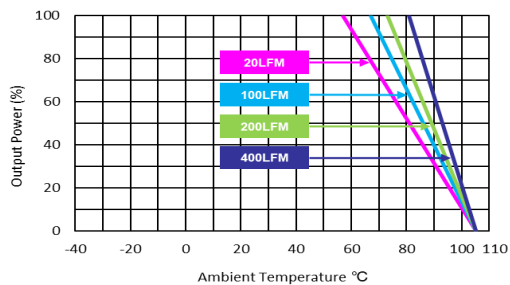


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-48S05

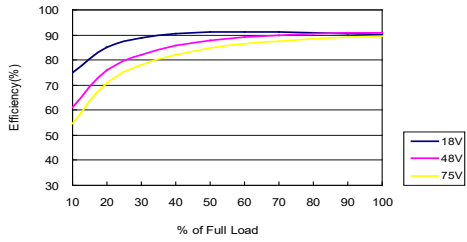


Efficiency Versus Output Current

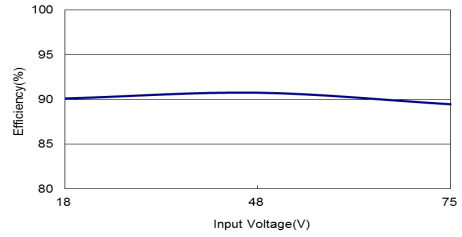


Efficiency Versus Input Voltage Full Load

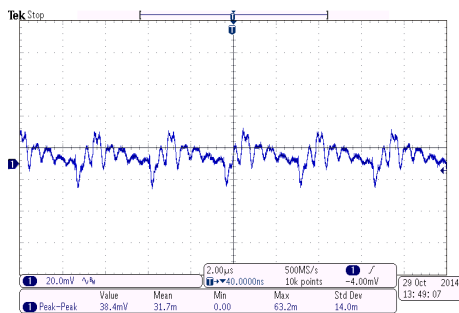


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

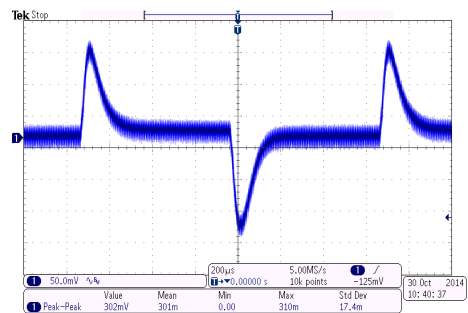


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

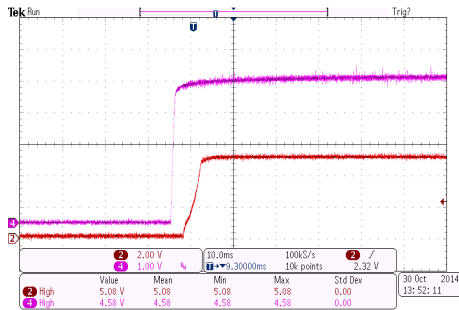

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

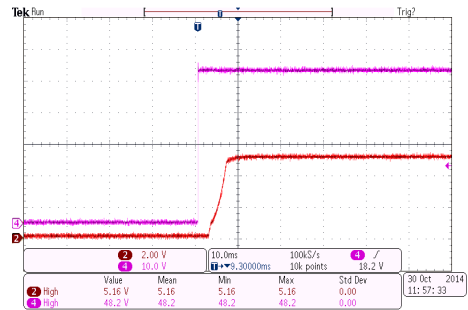


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

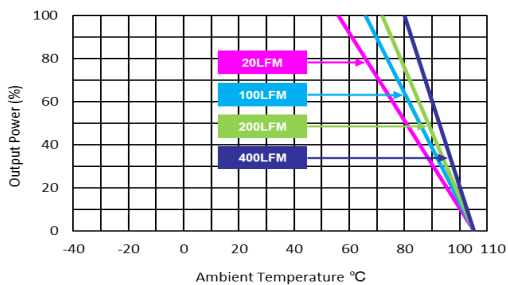


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-48S12

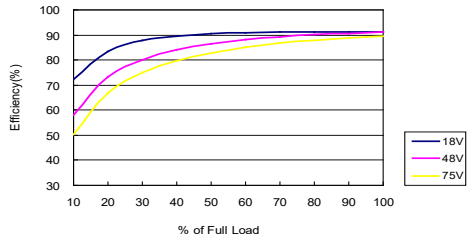


Efficiency Versus Output Current

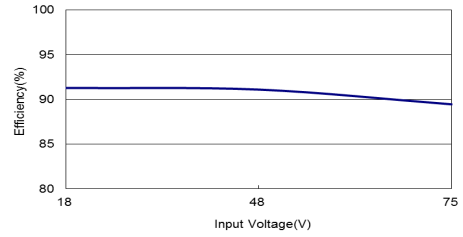


Efficiency Versus Input Voltage Full Load

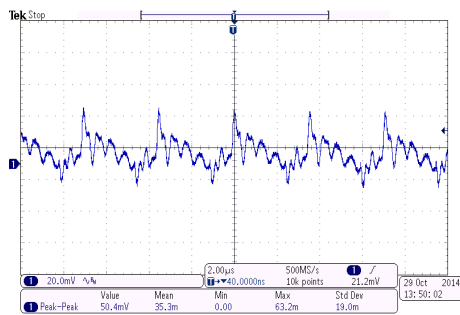


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

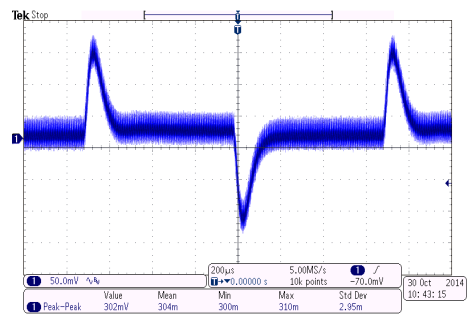


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

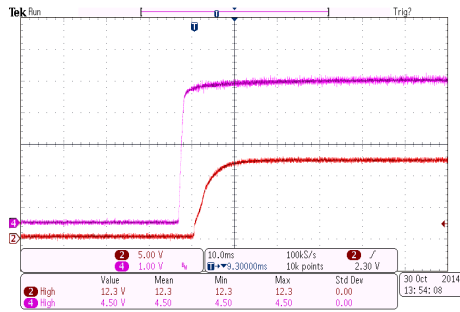

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

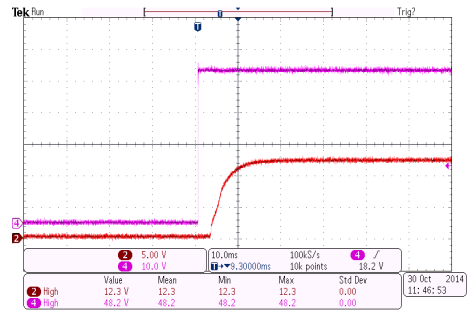


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

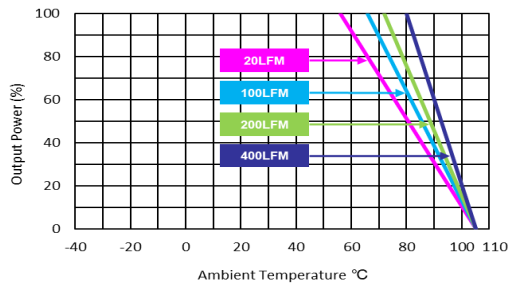


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-48S15

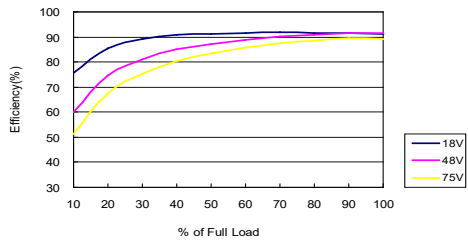


Efficiency Versus Output Current

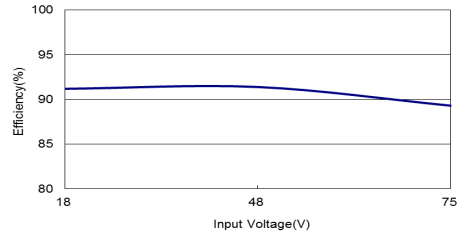


Efficiency Versus Input Voltage Full Load

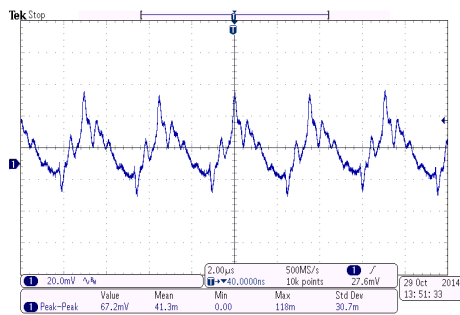


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

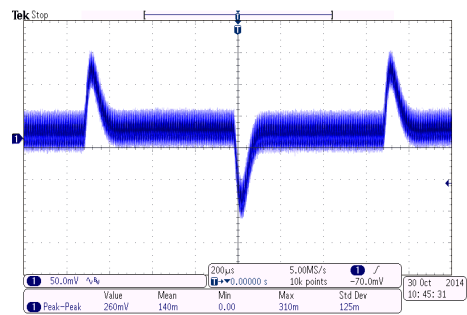


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

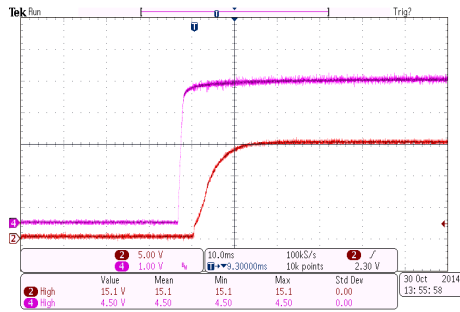

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

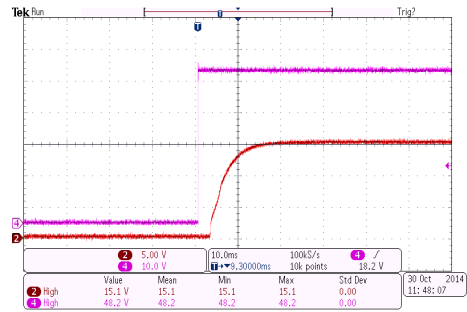


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

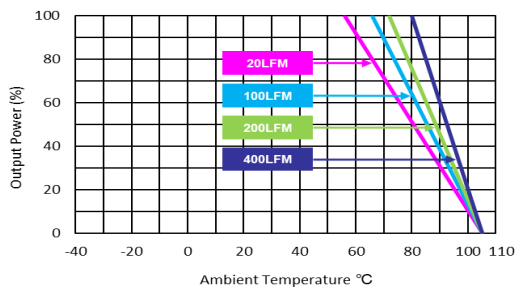


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-48D12

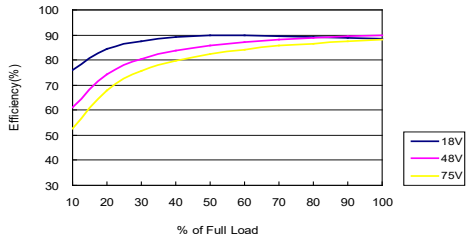


Efficiency Versus Output Current

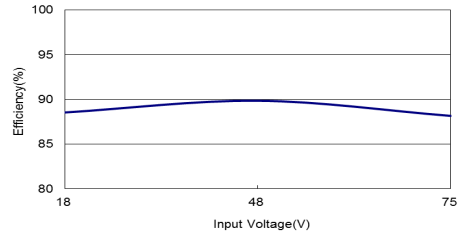


Efficiency Versus Input Voltage Full Load

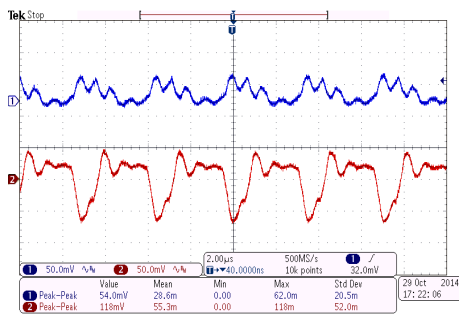


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

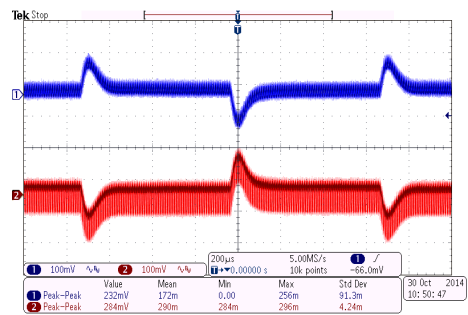


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

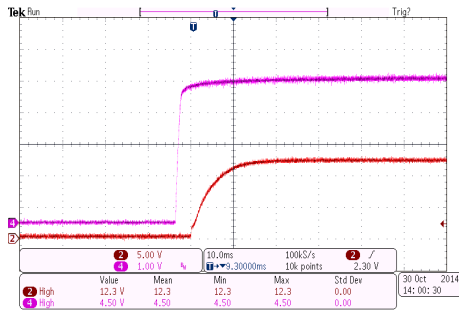

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

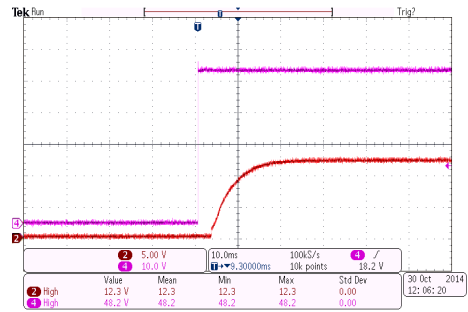

ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

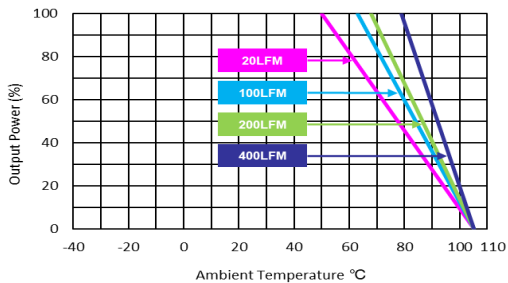


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$




**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MJWI25-48D15

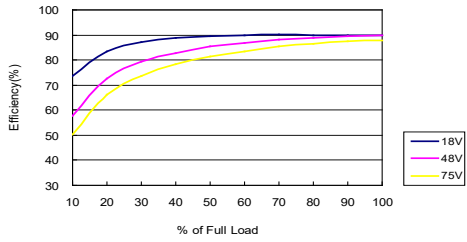


Efficiency Versus Output Current

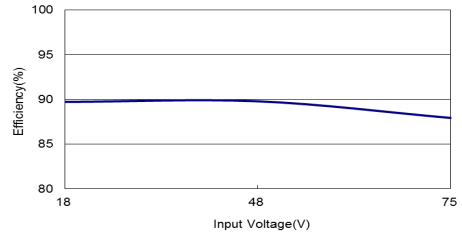


Efficiency Versus Input Voltage Full Load

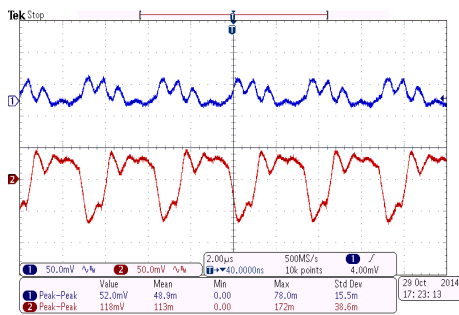


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

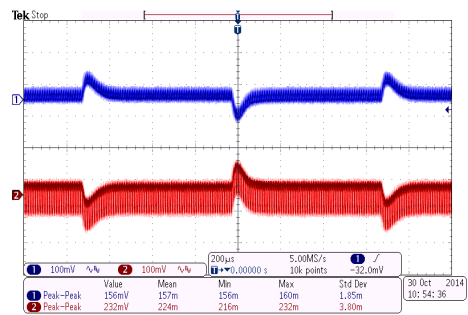


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

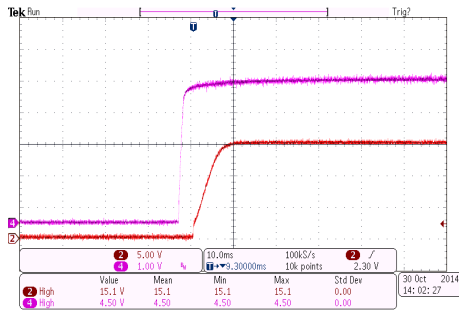

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

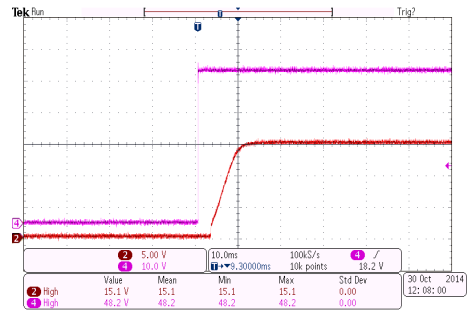


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

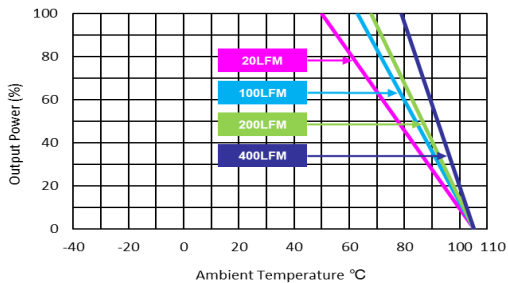

Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

### Package Specifications

#### Mechanical Dimensions

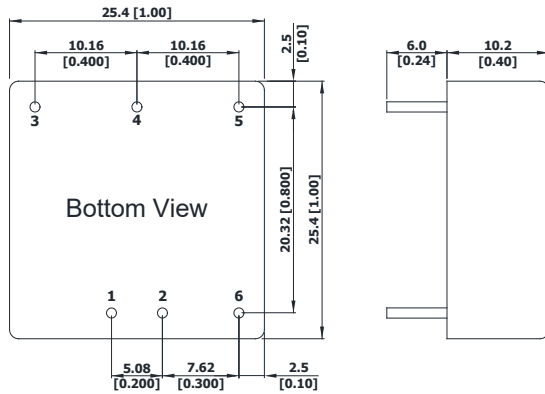

#### Pin Connections

Pin	Single Output	Dual Output	Diameter mm (inches)
1	+Vin	+Vin	Ø 1.0 [0.04]
2	-Vin	-Vin	Ø 1.0 [0.04]
3	+Vout	+Vout	Ø 1.0 [0.04]
4	Trim	Common	Ø 1.0 [0.04]
5	-Vout	-Vout	Ø 1.0 [0.04]
6	Remote On/Off	Remote On/Off	Ø 1.0 [0.04]


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

### Physical Characteristics

Case Size	: 25.4x25.4x10.2mm (1.0x1.0x0.4 inches)
Case Material	: Metal With Non-Conductive Baseplate
Base Material	: FR4 PCB (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy
Weight	: 16.5g

### Heatsink (Option -HS)


#### Mechanical Dimensions

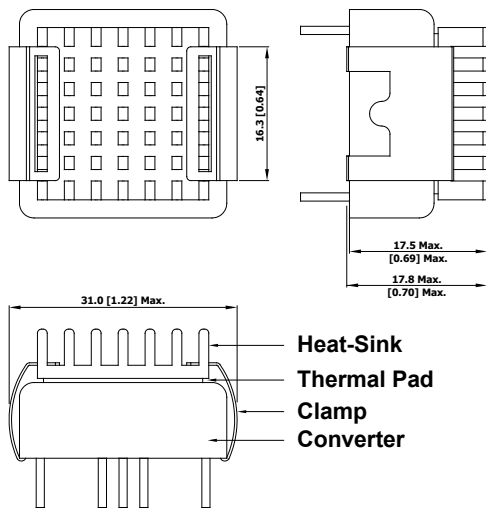

Heatsink Material: Aluminum  
 Finish: Anodic treatment (black)  
 Weight: 2g


- ▶ The advantages of adding a heatsink are:
  1. To improve heat dissipation and increase the stability and reliability of the DC-DC converters at high operating temperatures.
  2. To increase Operating temperature of the DC-DC converter, please refer to Derating Curve.

**Recommended Pad Layout for Single & Dual Output Converter**

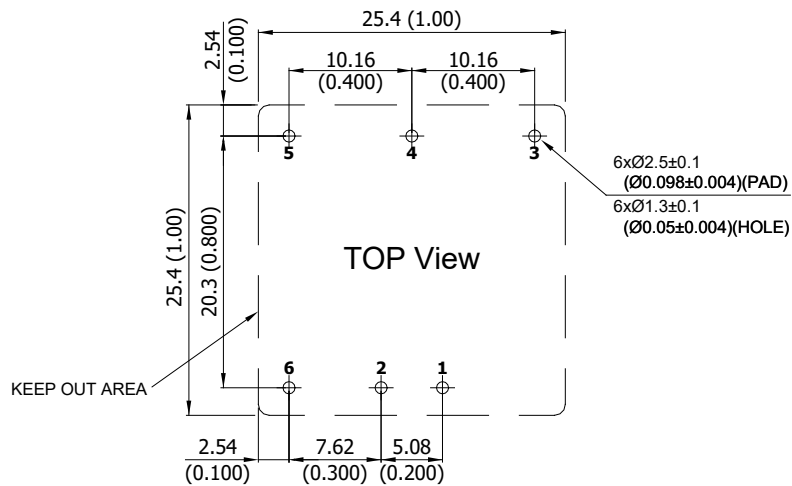

**External Output Trimming**

Output can be externally trimmed by using the method shown below

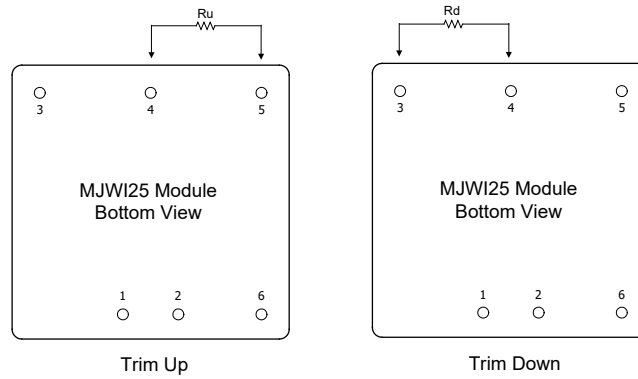


Trim Range (%)	MJWI25-XXS033		MJWI25-XXS05		MJWI25-XXS12		MJWI25-XXS15	
	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)	Trim down (kΩ)	Trim up (kΩ)
1	72.61	60.84	138.88	106.87	413.55	351.00	530.73	422.77
2	32.55	27.40	62.41	47.76	184.55	157.50	238.61	189.89
3	19.20	16.25	36.92	28.06	108.22	93.00	141.24	112.26
4	12.52	10.68	24.18	18.21	70.05	60.75	92.56	73.44
5	8.51	7.34	16.53	12.30	47.15	41.40	63.35	50.15
6	5.84	5.11	11.44	8.36	31.88	28.50	43.87	34.63
7	3.94	3.51	7.79	5.55	20.98	19.29	29.96	23.54
8	2.51	2.32	5.06	3.44	12.80	12.37	19.53	15.22
9	1.39	1.39	2.94	1.79	6.44	7.00	11.41	8.75
10	0.50	0.65	1.24	0.48	1.35	2.70	4.92	3.58

### Test Setup

#### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 kHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

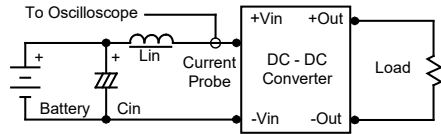

#### Peak-to-Peak Output Noise Measurement Test

Use a 1 $\mu$ F ceramic capacitor and a 10 $\mu$ F tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.



### Technical Notes

#### Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 6) during a logic low is -500 $\mu$ A. The maximum allowable leakage current of a switch connected to the on/off terminal (Pin 6) at logic high (3.5V to 12V) is 10mA.

#### Overload Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

#### Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


#### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 10 $\mu$ F for the 24V and 48V devices.

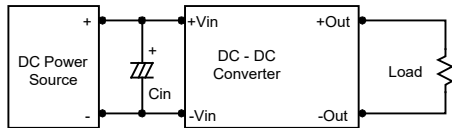

#### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 $\mu$ F capacitors at the output.

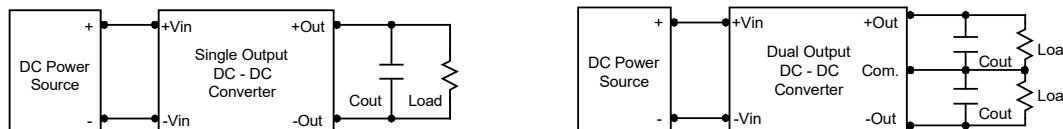


#### Maximum Capacitive Load

The MJWI25 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.


#### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.




**Remote On/Off Implementation**

The positive logic remote ON/OFF control circuit is included. Turns the module ON during logic High on the ON/Off pin and turns OFF during logic Low. The ON/OFF input signal (Von/off) that referenced to GND. If not using the remote on/off feature, please open circuit between on/off pin and -Vin pin to turn the module on.

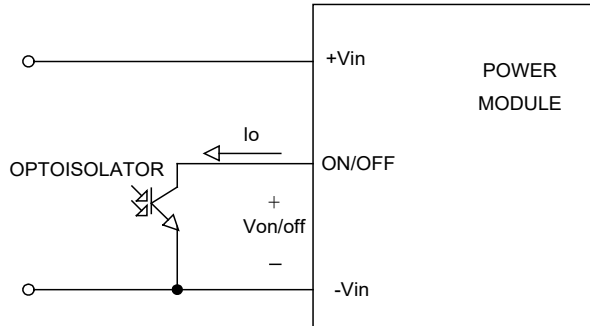

Isolated-Closure Remote ON/OFF


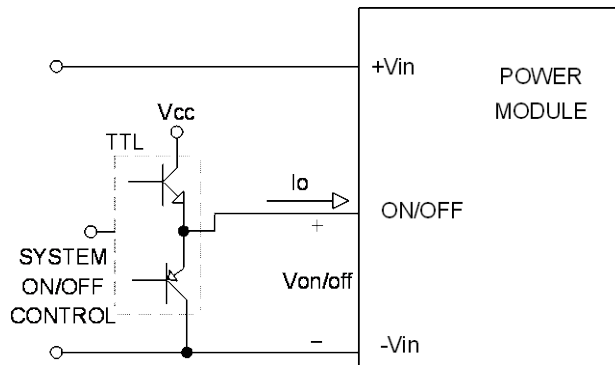


Level Control Using TTL Output

**Packaging Information for Tube**

Tube

Nail



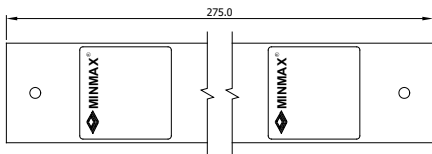



Unit: mm

10 PCS per TUBE (without Heatsink)

Tube

Plug

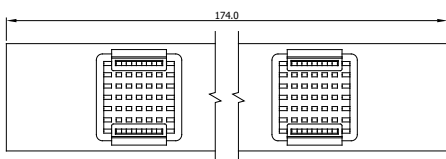


Unit: mm

5 PCS per TUBE (with Heatsink)

**Wave Soldering Considerations**

Lead free wave solder profile

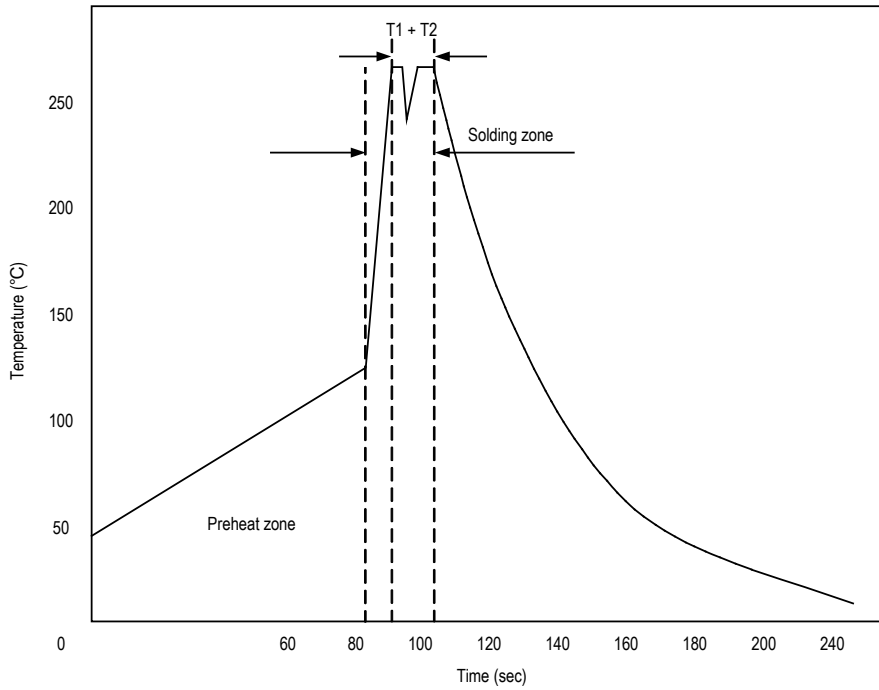

Zone	Reference Parameter
Preheat	Rise temp. speed : 3°C/sec max.
zone	Preheat temp. : 100~130°C
Actual	Peak temp. : 250~260°C
heating	Peak time(T1+T2) : 4~6 sec

**Hand Welding Parameter**

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C

Part Number Structure							
M	J	WI	25	-	24	S	033
Package Type 1" X 1"	Ultra-wide 4:1 Input Voltage Range	Output Power 25 Watt	Input Voltage Range		Output Quantity	Output Voltage	
			24: 9 ~ 36 VDC		S: Single	033: 3.3 VDC	
			48: 18 ~ 75 VDC		D: Dual	05: 5 VDC	
						12: 12 VDC	
						15: 15 VDC	

MTBF and Reliability		
The MTBF of MJWI25 series of DC-DC converters has been calculated using MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.		
Model	MTBF	Unit
MJWI25-24S033	552,000	Hours
MJWI25-24S05	454,000	
MJWI25-24S12	511,000	
MJWI25-24S15	611,000	
MJWI25-24D12	507,000	
MJWI25-24D15	444,000	
MJWI25-48S033	645,000	
MJWI25-48S05	548,000	
MJWI25-48S12	617,000	
MJWI25-48S15	613,000	
MJWI25-48D12	518,000	
MJWI25-48D15	453,000	