



MINMAX[®]

MKWI10C Series

Electric Characteristic Note

MKWI10C Series EC Note

DC-DC Power Module 10W

Features

- ▶ Fully Encapsulated Plastic Case for Chassis and DIN-Rail Mounting Version
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ High Efficiency up to 86%
- ▶ I/O Isolation 3000 VDC
- ▶ Operating Ambient Temp. Range -40°C to +92.5°C
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Remote On/Off Control
- ▶ EMI Emission EN 55032 Class A Approved
- ▶ EMC Immunity EN 61000-4-2,3,4,5,6,8 Approved
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking



Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

Product Overview

The MINMAX MKWI10C series is a new range of high performance DC-DC converters featuring a wide 4:1 input range in a chassis-mount package with terminal strip connections and optional DIN-Rail mounting offer system designers the opportunity to eliminate the power board request in the field application. Further features including high efficiency 86%, wide operating temp. range by -40°C to +87°C, I/O isolation 3000VDC for 60Sec, no min. load request, built-in EMC filter for EMI emission EN 55032 class A and EMS immunity EN 61000-4-2,3,4,5,6,8 approved; and abnormal operation protection with under-voltage, overload and short circuit protections. All family have been qualified per CB scheme with safety approvals to UL/cUL/IEC/EN 62368-1 with 3 years warranty.

Table of contents

Model Selection Guide	P2	Package Specifications	P22
Input Specifications.....	P2	Test Setup.....	P24
Remote On/Off Control	P2	Technical Notes	P24
Output Specifications.....	P3	Remote On/Off Implementation.....	P25
General Specifications.....	P3	Packaging Information.....	P25
EMC Specifications.....	P3	Part Number Structure	P26
Environmental Specifications	P3	MTBF and Reliability	P26
Characteristic Curves	P4		

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
				@Max. Load	@No Load		
	VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	%
MKW110-24S05C	24 (9 ~ 36)	5	2000	496	30	1000	84
MKW110-24S051C		5.1	2000	506		1000	84
MKW110-24S12C		12	833	484		470	86
MKW110-24S15C		15	666	484		330	86
MKW110-24S24C		24	416	484		150	86
MKW110-24S48C		48	208	495		68	84
MKW110-24D12C		±12	±416	484		220#	86
MKW110-24D15C		±15	±333	484		150#	86
MKW110-24D24C		±24	±208	489		68#	85
MKW110-48S05C	48 (18 ~ 75)	5	2000	248	20	1000	84
MKW110-48S051C		5.1	2000	253		1000	84
MKW110-48S12C		12	833	242		470	86
MKW110-48S15C		15	666	242		330	86
MKW110-48S24C		24	416	242		150	86
MKW110-48S48C		48	208	248		68	84
MKW110-48D12C		±12	±416	242		220#	86
MKW110-48D15C		±15	±333	242		150#	86
MKW110-48D24C		±24	±208	245		68#	85

For each output

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	---	---	9	
	48V Input Models	---	---	18	
Under Voltage Shutdown	24V Input Models	---	8	---	
	48V Input Models	---	16	---	
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	---	60	ms
Input Filter	All Models	Internal Pi Type			

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0~1.2V or Short Circuit (Pin 1 and Pin 2)				
Control Input Current (on)	Vctrl = 5V	---	---	500	μA
Control Input Current (off)	Vctrl = 0V	---	---	-500	μA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	---	2.5	---	mA

Output Specifications						
Parameter	Conditions / Model	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	---	±2.0	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads	---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±0.5	%	
Load Regulation	Io=0% to 100%	---	---	±0.5	%	
Load Cross Regulation (Dual Output Models)	Asymmetrical Load 25/100% Full Load	---	---	±5.0	%	
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	24V & ±24V & 48V Output Models	---	180	---	mV _{P-P}
		Other Output Models	---	90	---	mV _{P-P}
Transient Recovery Time	25% Load Step Change	---	---	500	μsec	
Transient Response Deviation		---	±3	±5	%	
Temperature Coefficient		---	±0.01	±0.02	%/°C	
Over Load Protection	Hiccup	---	150	---	%	
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.7Hz typ.)					

General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	2200	---	pF
Switching Frequency		---	330	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	4,132,899	---	---	Hours
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1 & 60950-1(CB report)				








EMC Specifications				
Parameter	Standards & Level			Performance
EMI	Conduction	EN 55032	Without external components	Class A
	Radiation			
EMS	EN55035			
	ESD	Direct discharge	Indirect discharge HCP & VCP	
		EN61000-4-2 Air ± 8kV	Contact ± 6kV	
	Radiated immunity	EN61000-4-3 10V/m		
	Fast transient	EN61000-4-4 ±2kV		
	Surge	EN61000-4-5 ±2kV		
	Conducted immunity	EN61000-4-6 10Vrms		
PFMF	EN61000-4-8 100A/m			

Environmental Specifications			
Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+92.5	°C
Case Temperature	---	+105	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

Notes	
1	Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
2	Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
3	We recommend to protect the converter by a slow blow fuse in the input supply line.
4	Other input and output voltage may be available, please contact MINMAX.
5	Specifications are subject to change without notice.


Characteristic Curves

All test conditions are at 25°C The figures are identical for MKWI10-24S05C

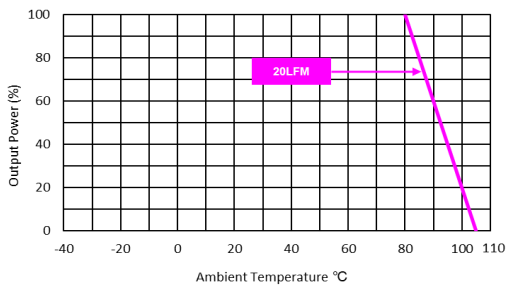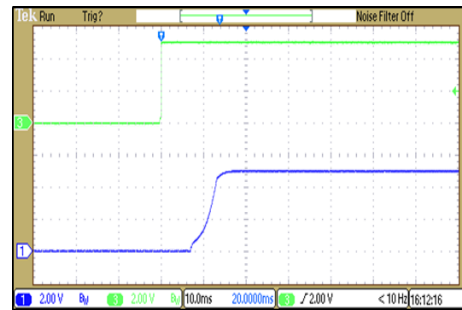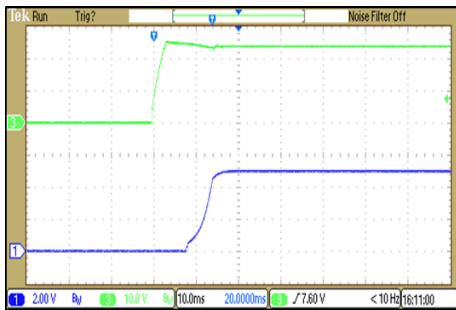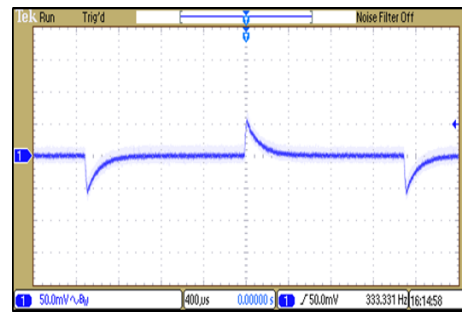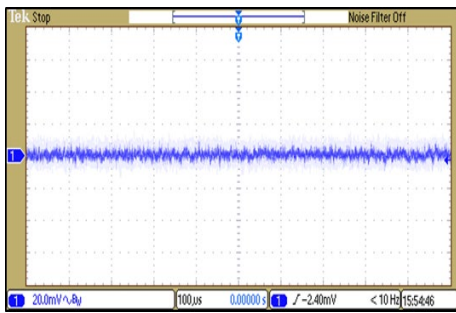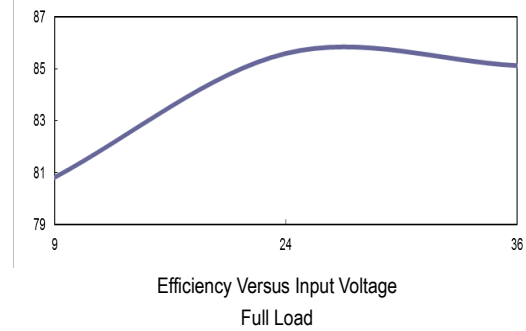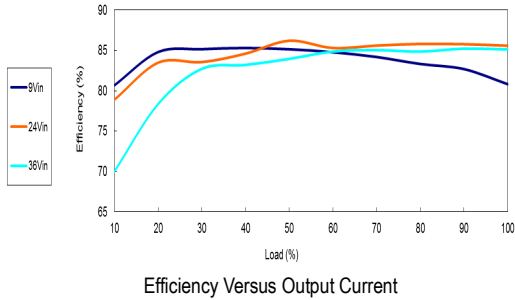


Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW10-24S051C

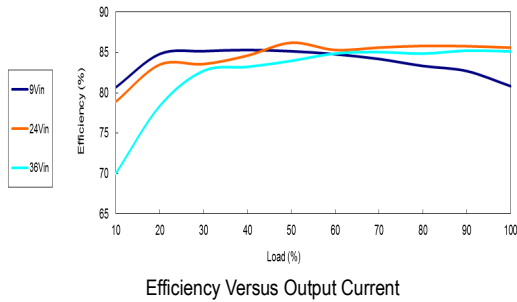


Efficiency Versus Output Current

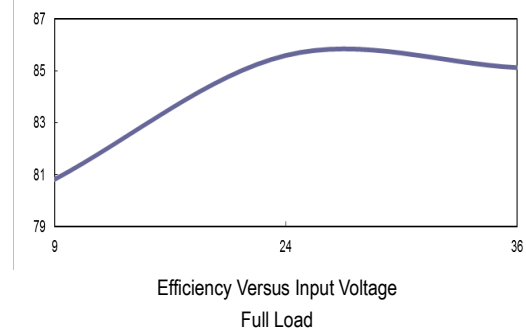

Efficiency Versus Input Voltage Full Load

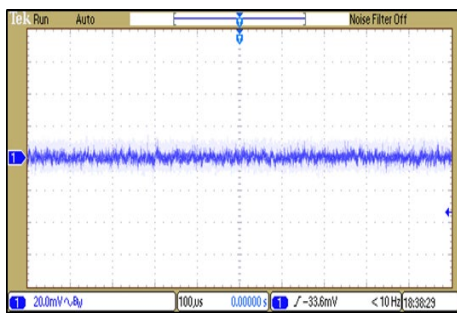


Typical Output Ripple and Noise
 $V_{in} = V_{in\ nom}$; Full Load

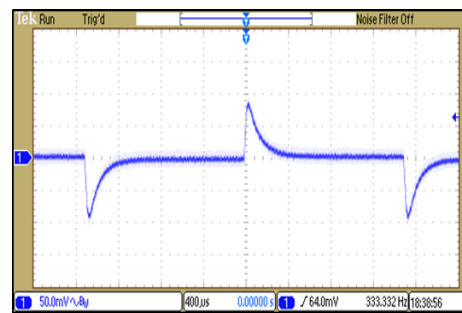


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in} = V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in} = V_{in\ nom}$; Full Load

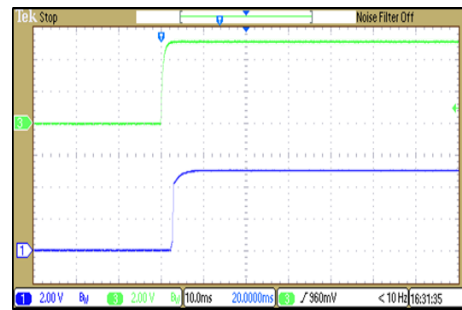


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in} = V_{in\ nom}$; Full Load

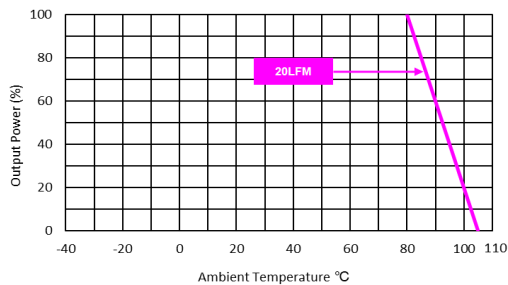


Derating Output Power Versus Ambient Temperature
 $V_{in} = V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-24S12C

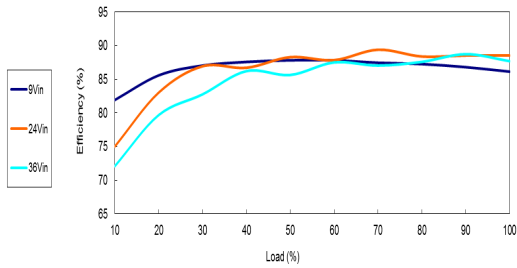


Efficiency Versus Output Current

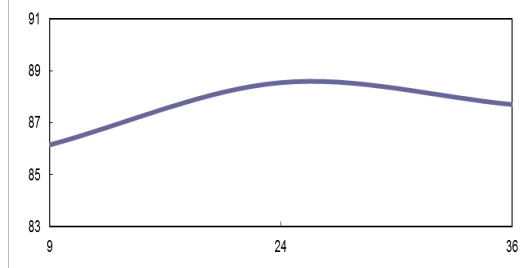

Efficiency Versus Input Voltage Full Load

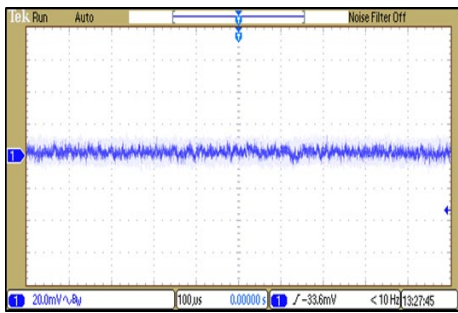

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

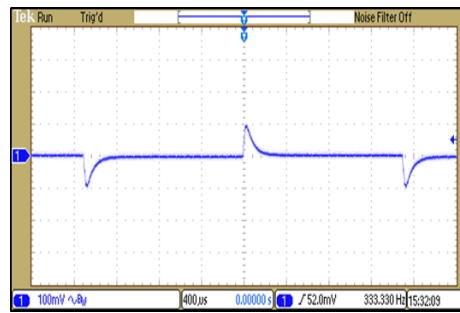


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

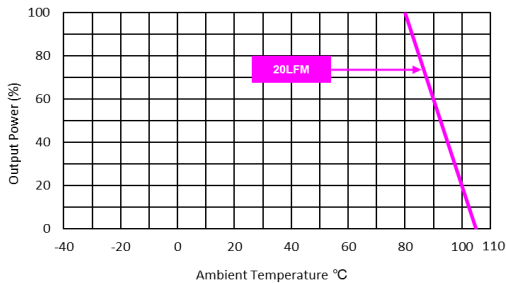


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW10-24S15C

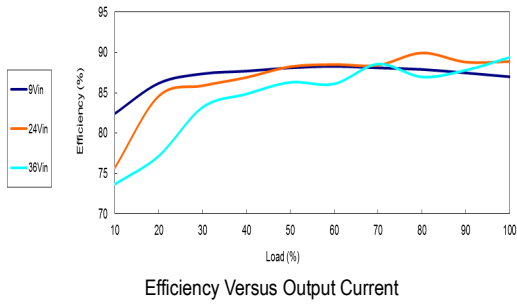


Efficiency Versus Output Current

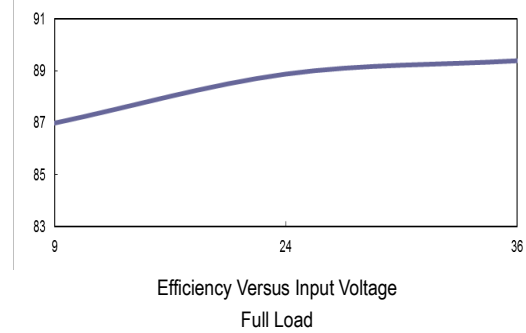

Efficiency Versus Input Voltage Full Load

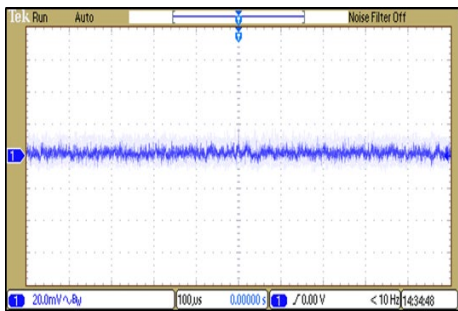


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

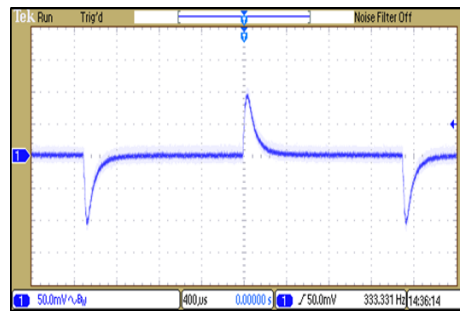


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

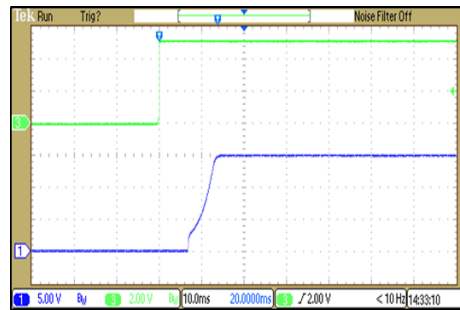


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

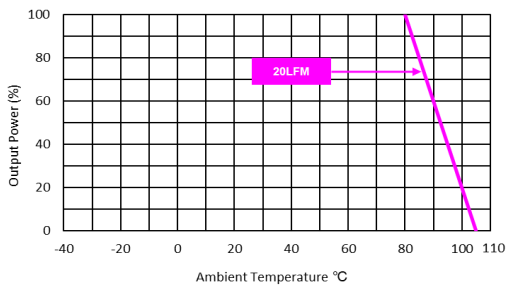


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-24S24C

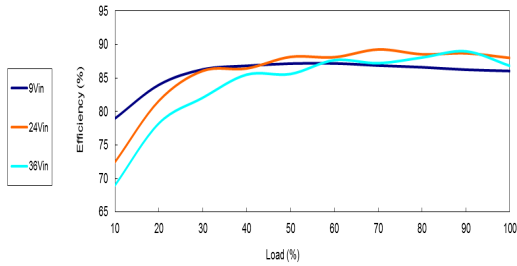


Efficiency Versus Output Current

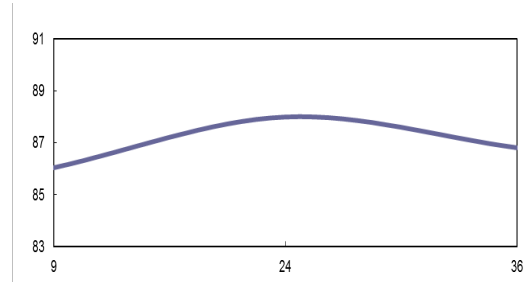


Efficiency Versus Input Voltage Full Load

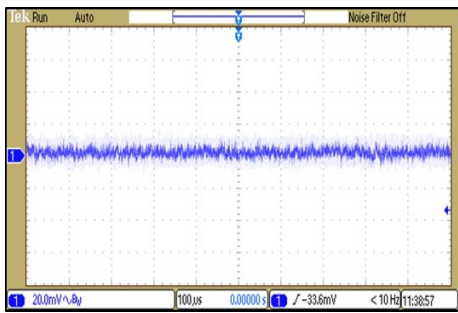


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

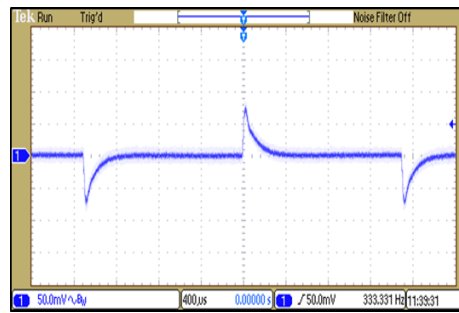


Transient Response to Dynamic Load Change from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

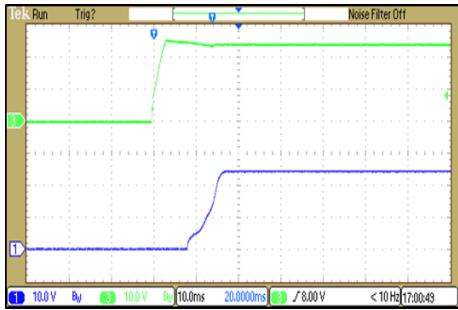

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

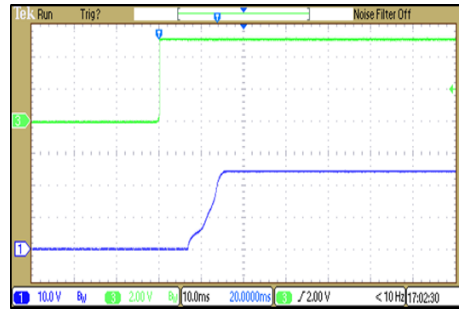


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

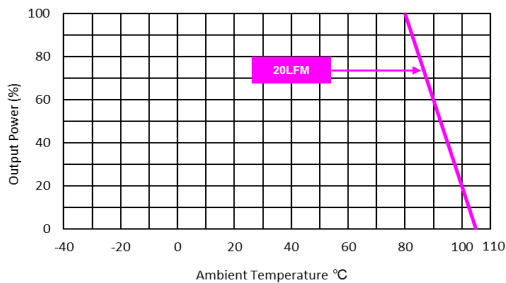


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-24S48C

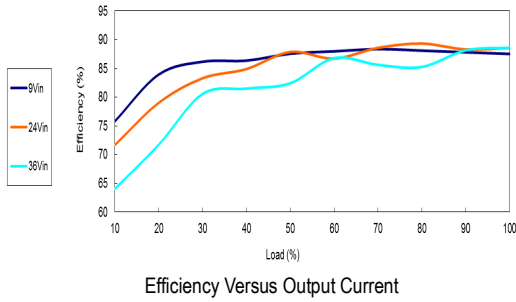


Efficiency Versus Output Current

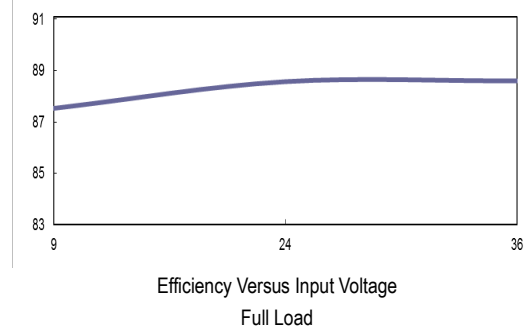

Efficiency Versus Input Voltage Full Load

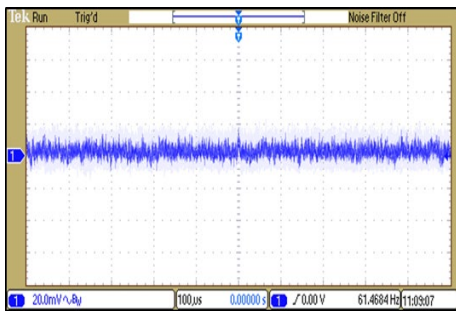


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

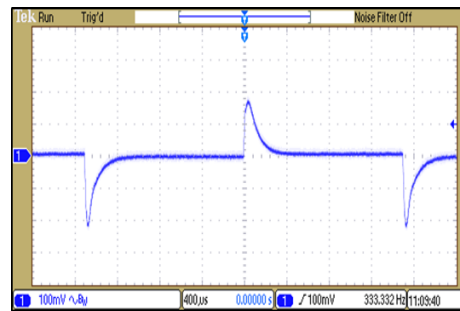


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

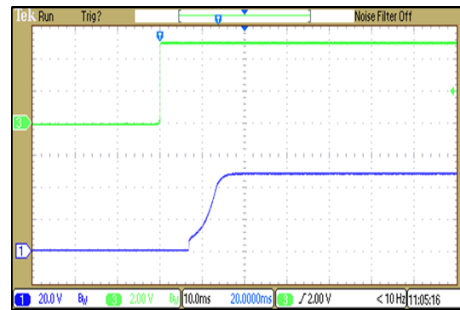


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

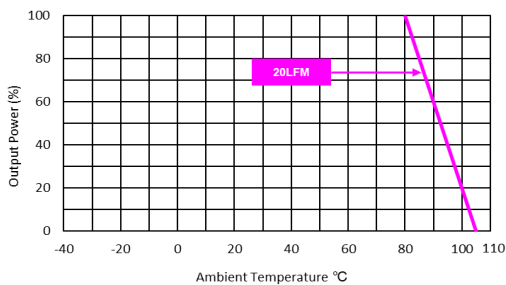


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-24D12C

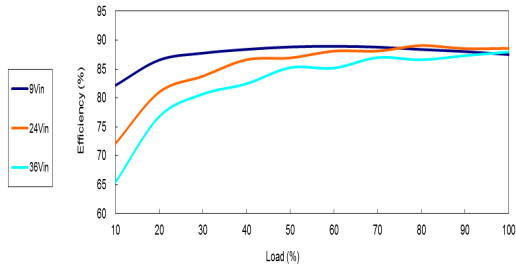


Efficiency Versus Output Current

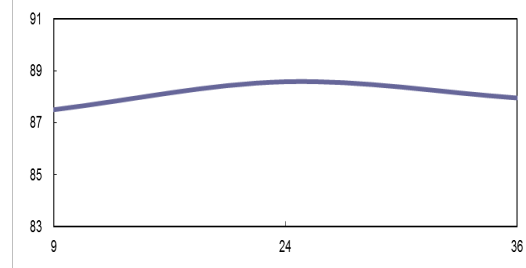


Efficiency Versus Input Voltage Full Load

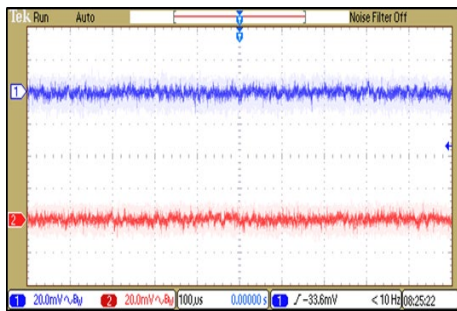


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

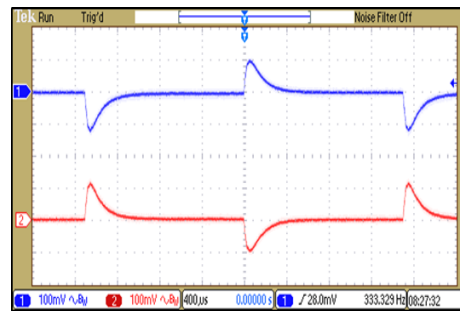


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

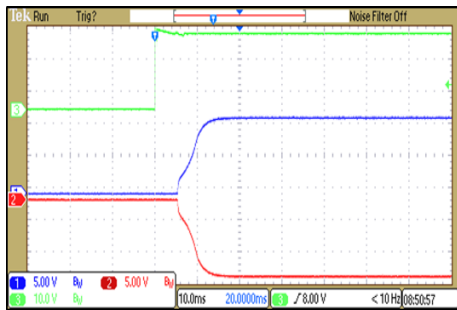

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

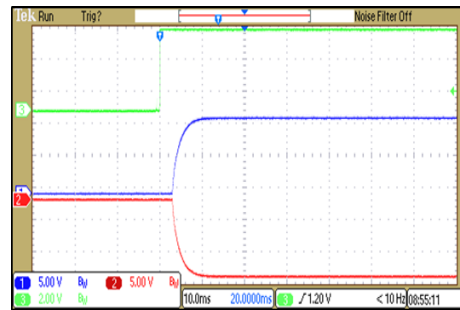







ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

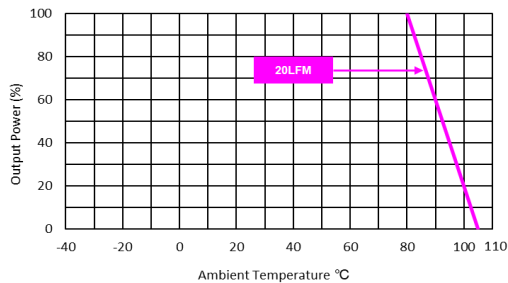

Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MKWI10-24D15C

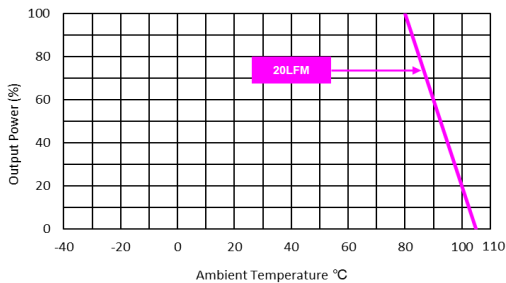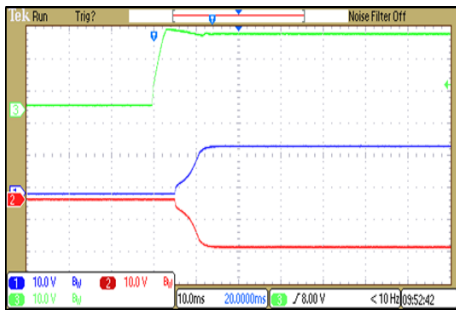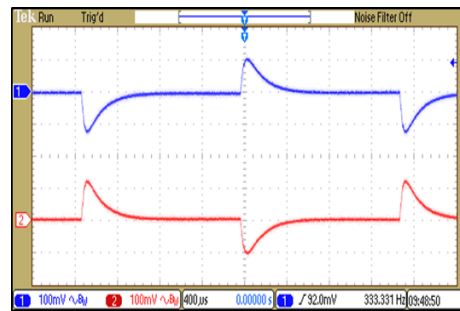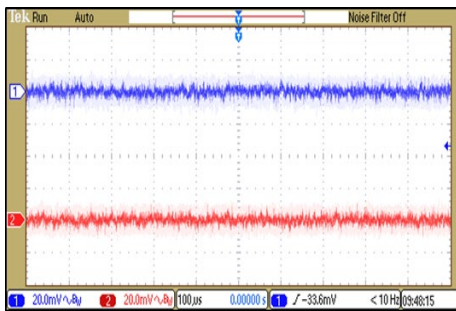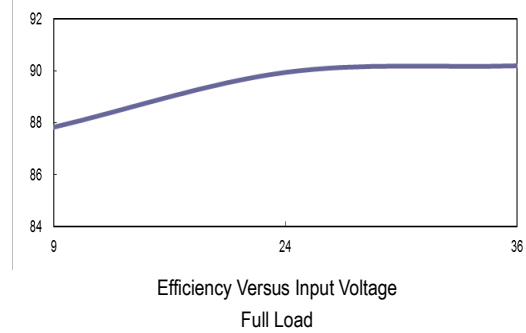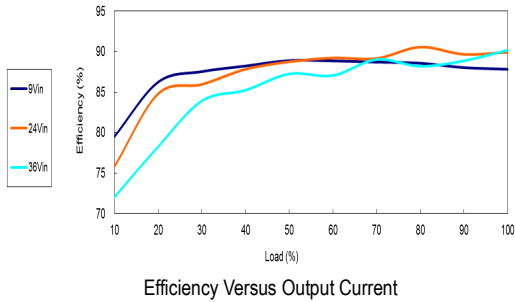


Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-24D24C

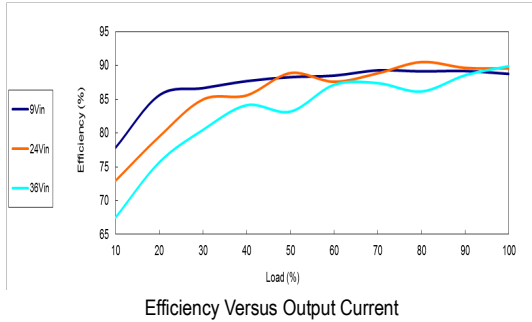


Efficiency Versus Output Current

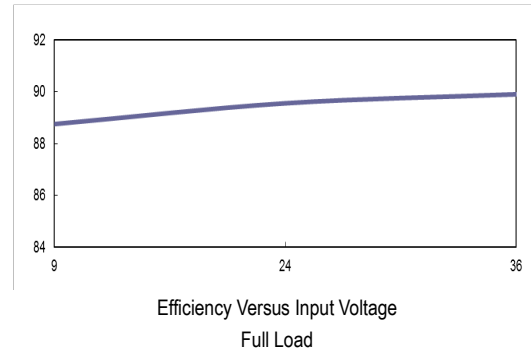

Efficiency Versus Input Voltage Full Load

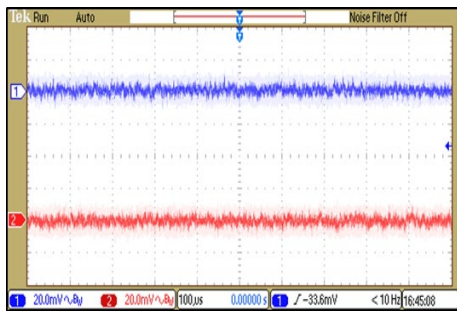

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

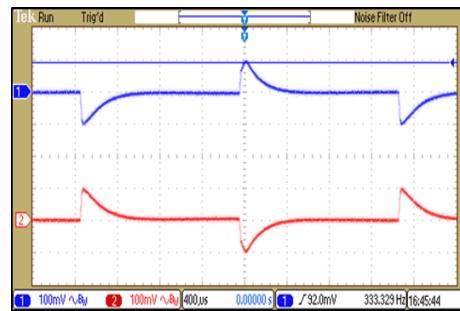


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load




ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

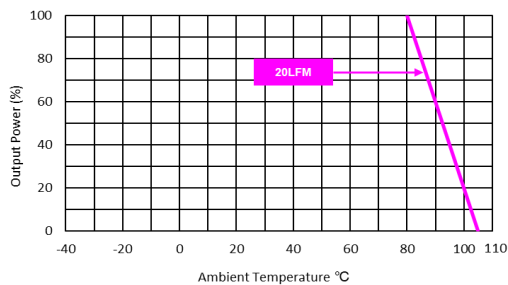


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-48S05C

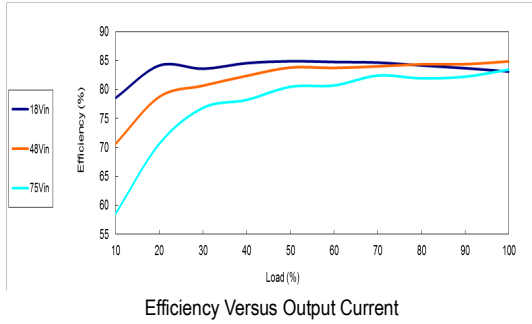


Efficiency Versus Output Current

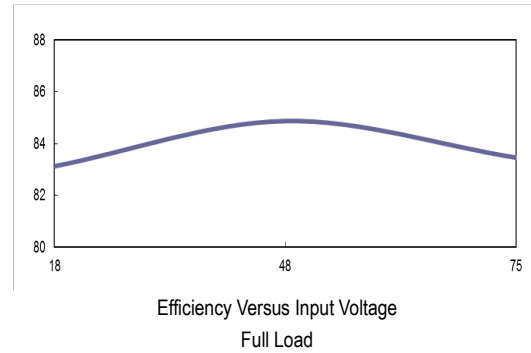

Efficiency Versus Input Voltage Full Load

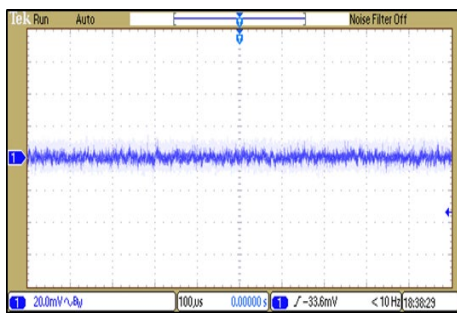


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

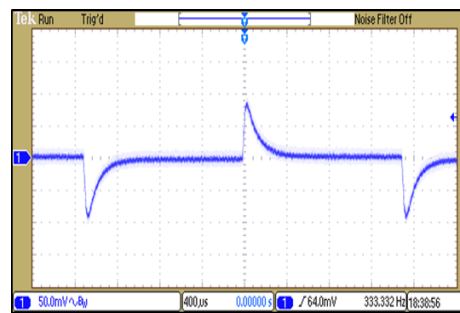


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

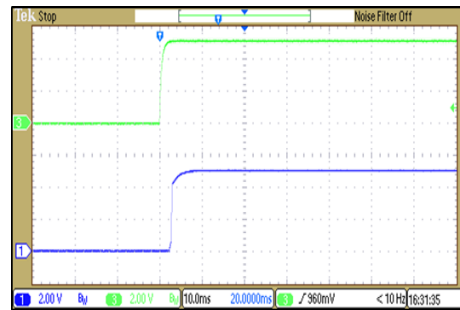


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

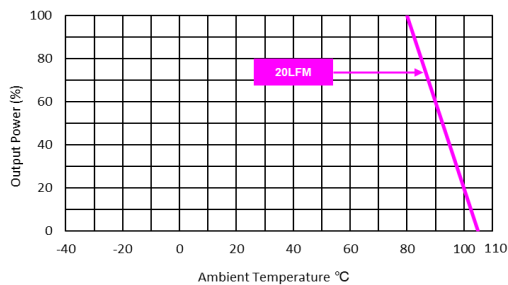


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-48S051C

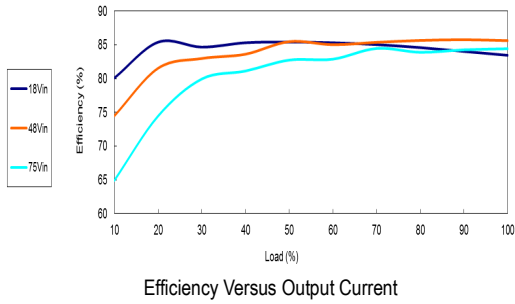


Efficiency Versus Output Current

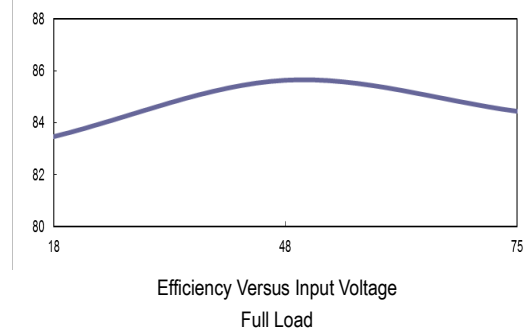


Efficiency Versus Input Voltage Full Load

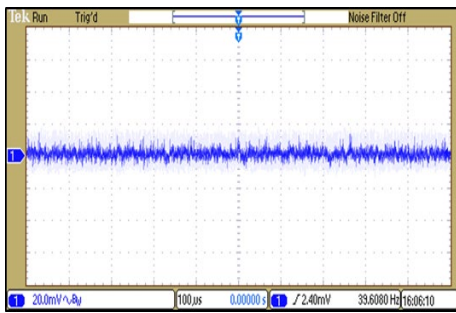


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

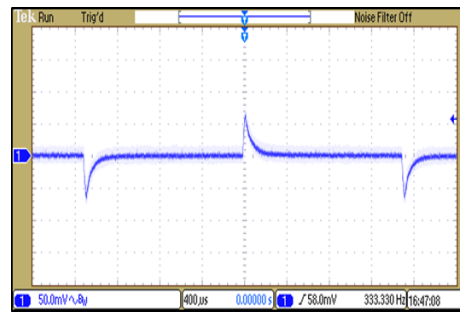


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

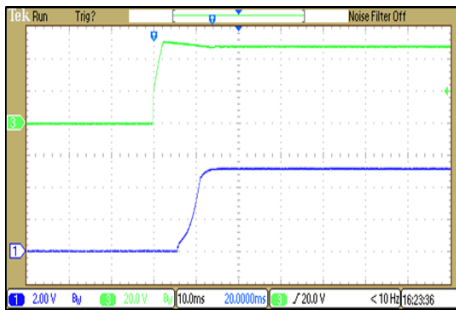

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

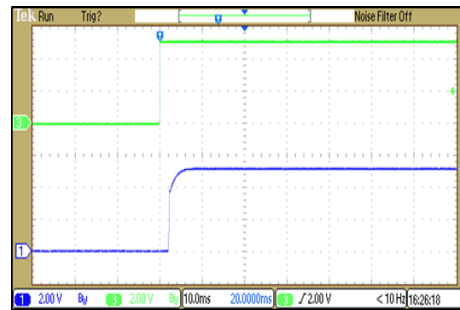







ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

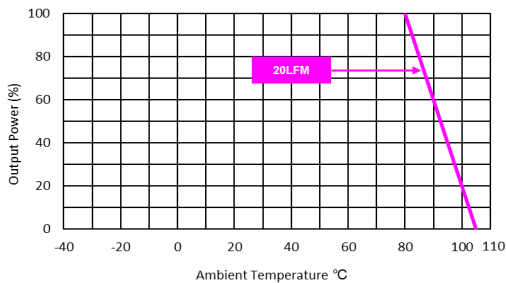

Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MKWI10-48S12C

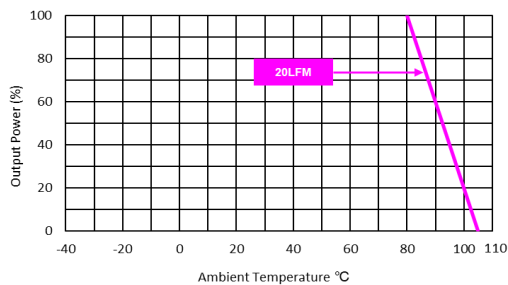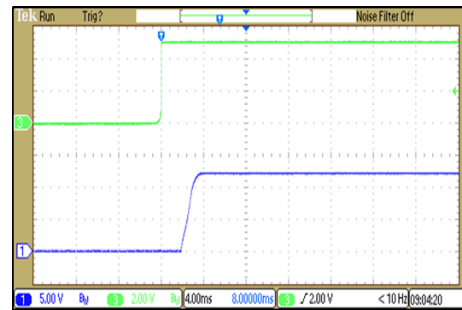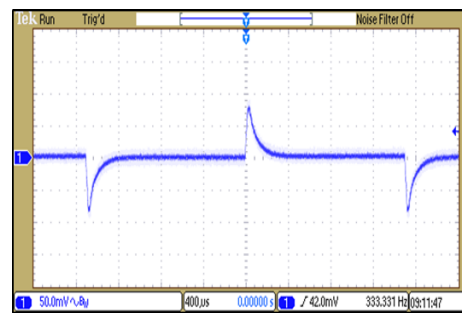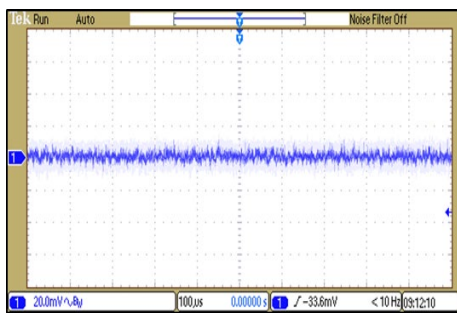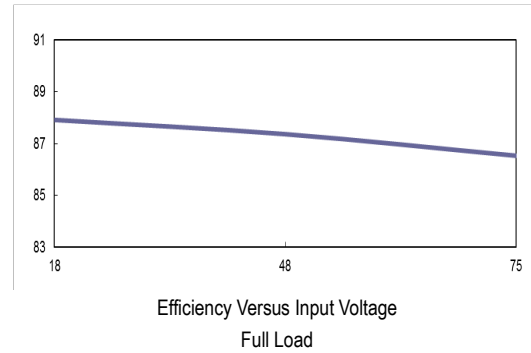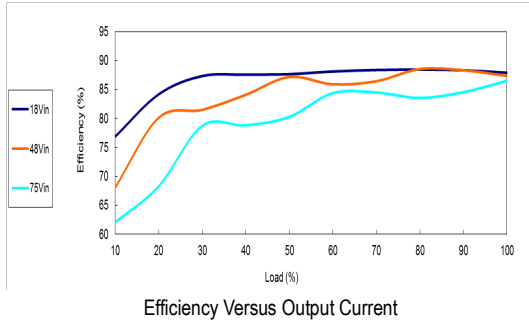


Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-48S15C

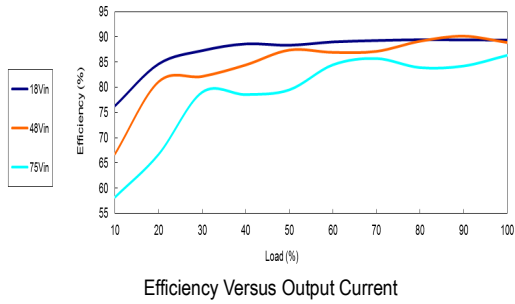


Efficiency Versus Output Current

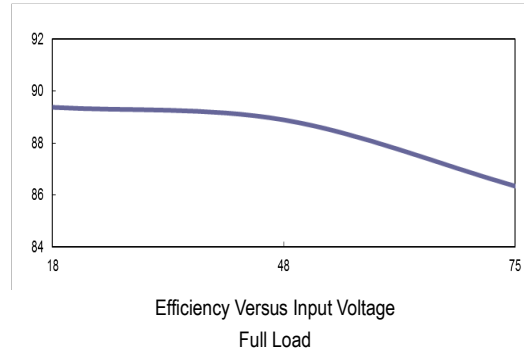


Efficiency Versus Input Voltage Full Load

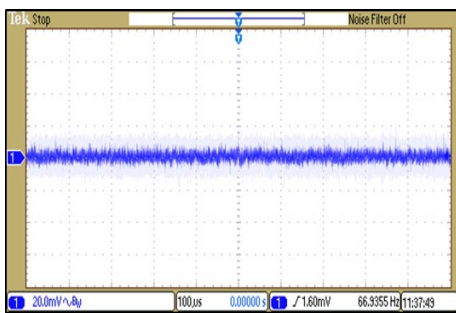


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

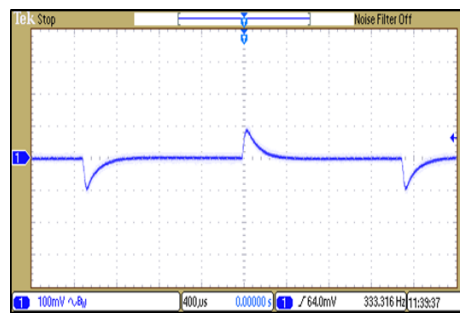


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

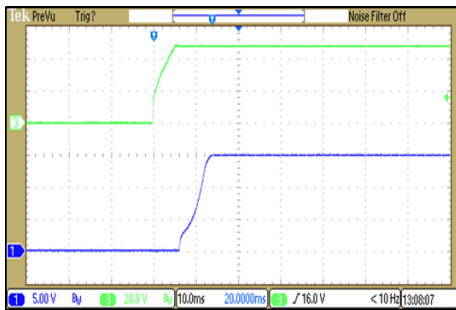

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

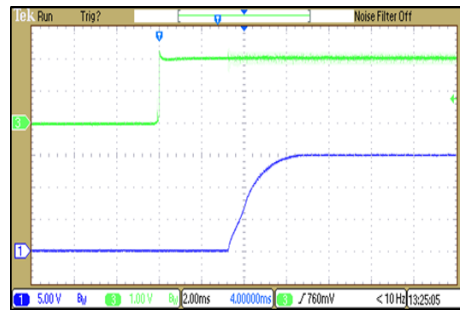


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

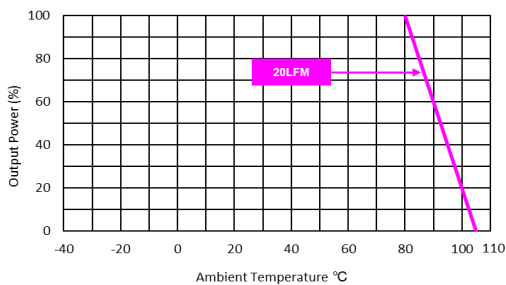


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C. The figures are identical for MKWI10-48S24C

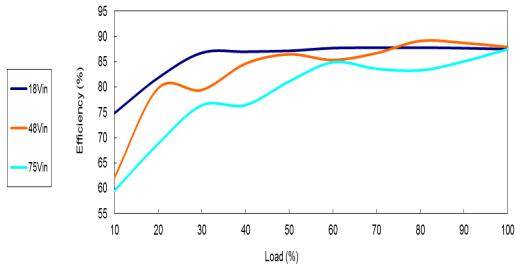


Efficiency Versus Output Current

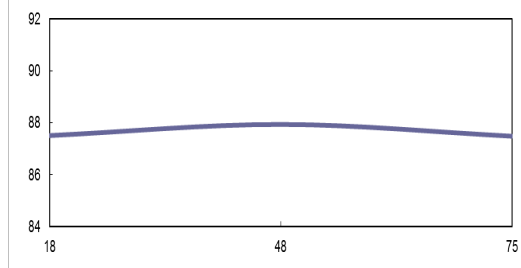


Efficiency Versus Input Voltage
Full Load

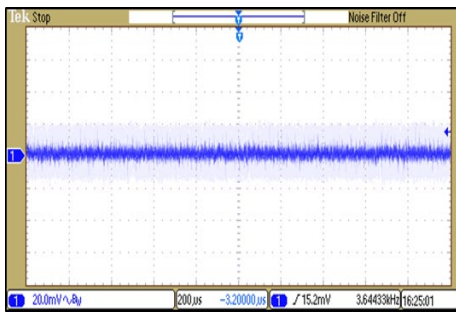


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

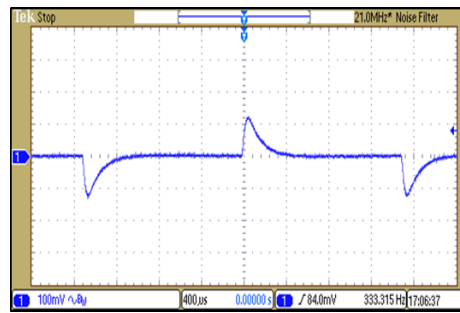


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$

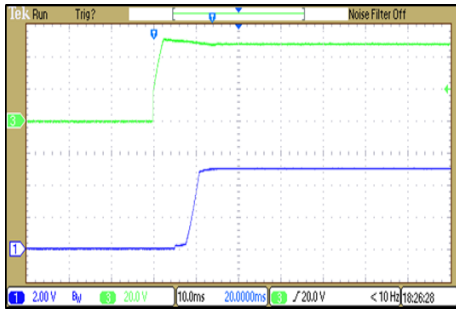

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

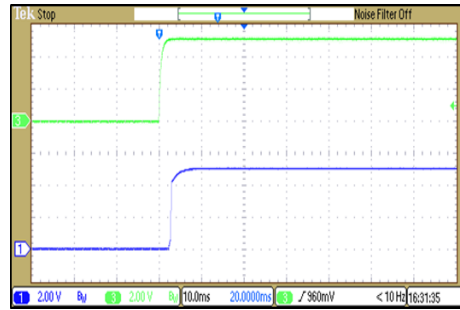


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

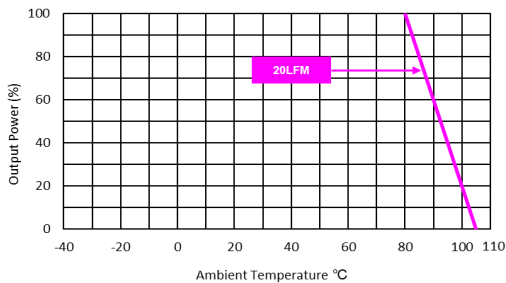


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKWI10-48S48C

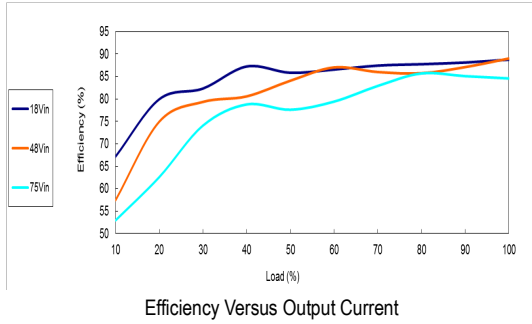


Efficiency Versus Output Current

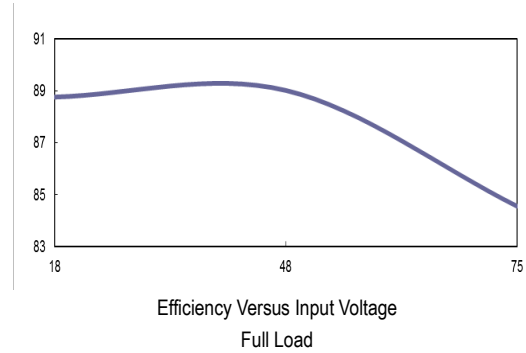


Efficiency Versus Input Voltage Full Load

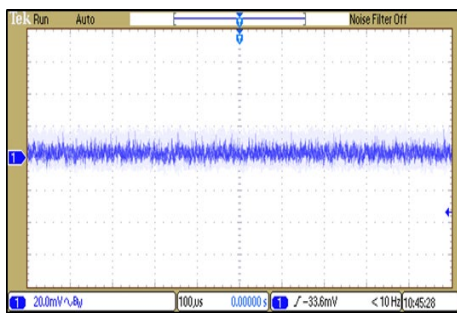


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

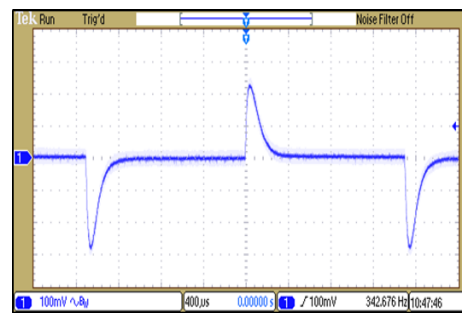


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

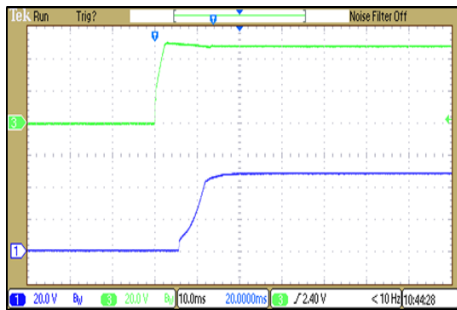

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

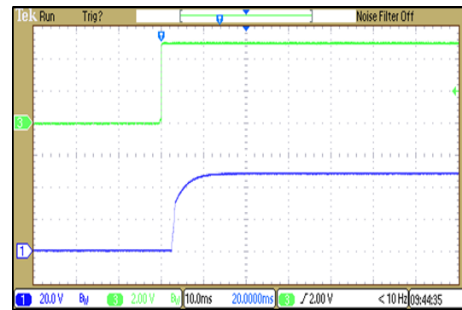


ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

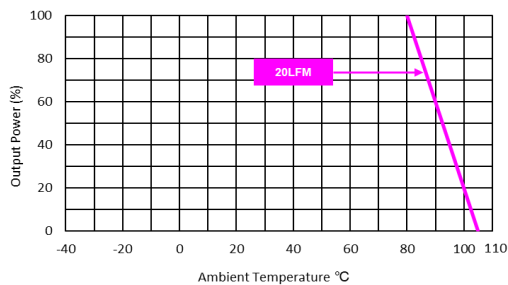


Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C. The figures are identical for MKWI10-48D12C

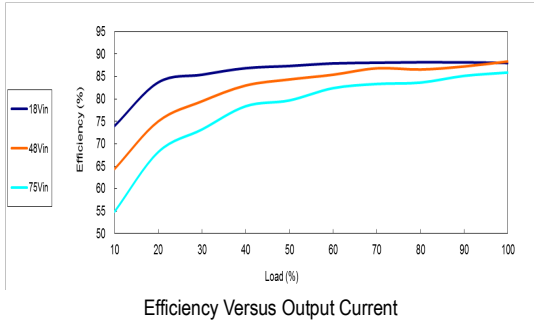


Efficiency Versus Output Current

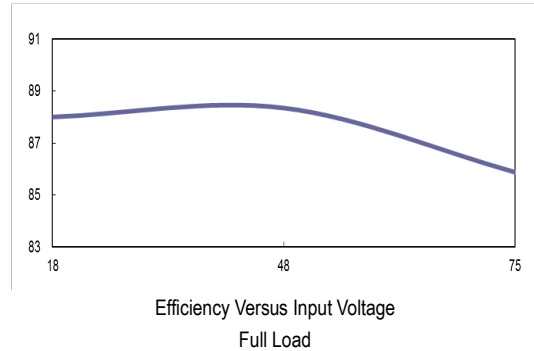

Efficiency Versus Input Voltage Full Load

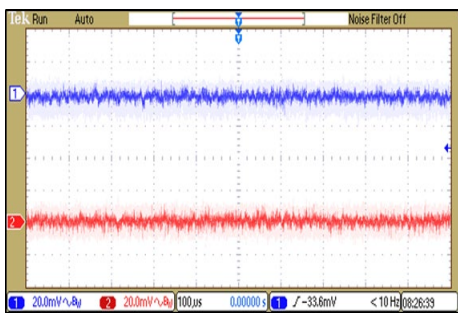


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

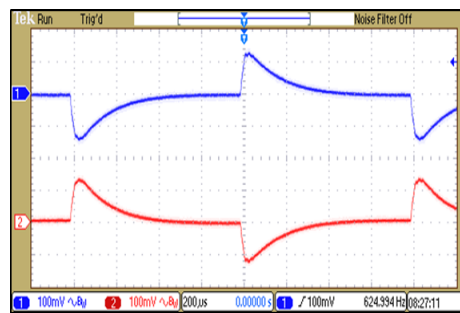


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load; $V_{in}=V_{in\ nom}$



Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

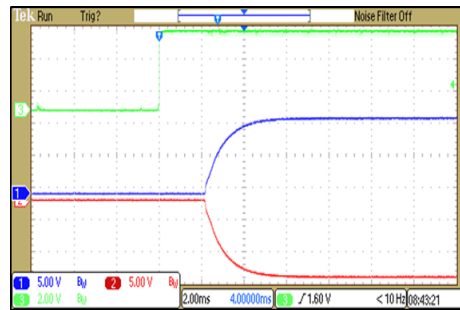







ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

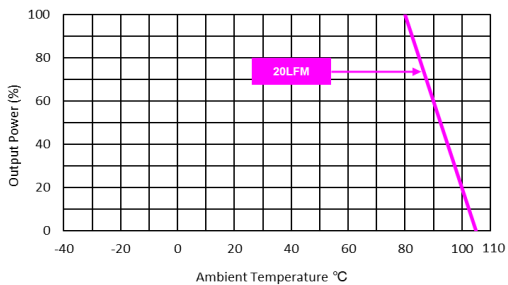

Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MKWI10-48D15C

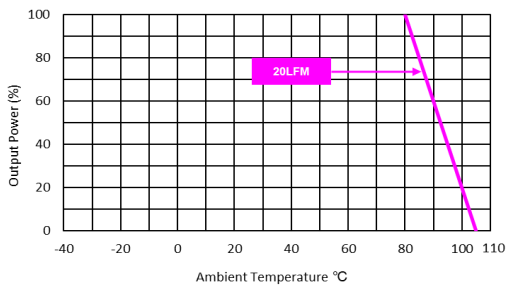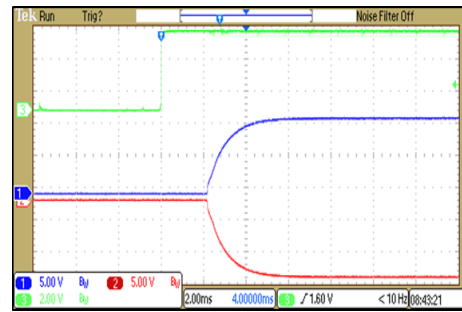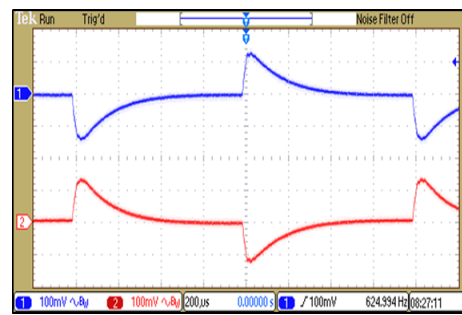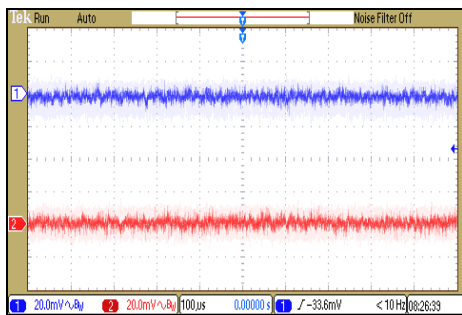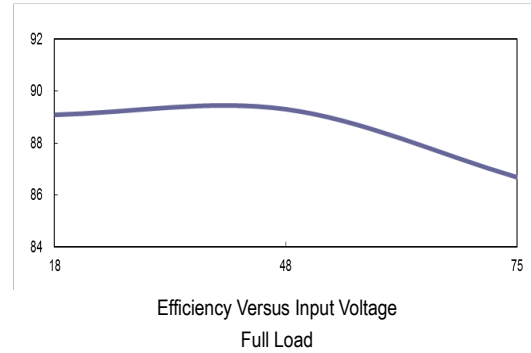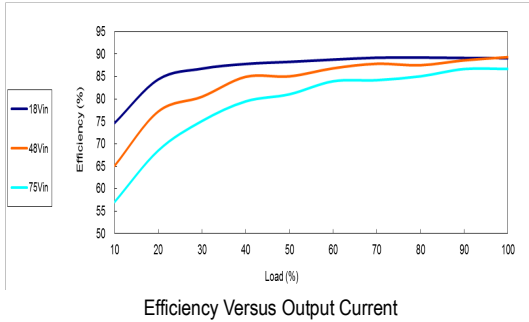


Characteristic Curves


All test conditions are at 25°C. The figures are identical for MKWI10-48D24C

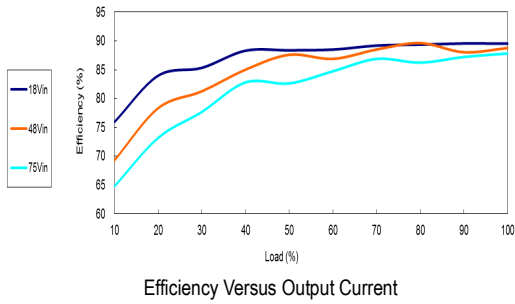


Efficiency Versus Output Current

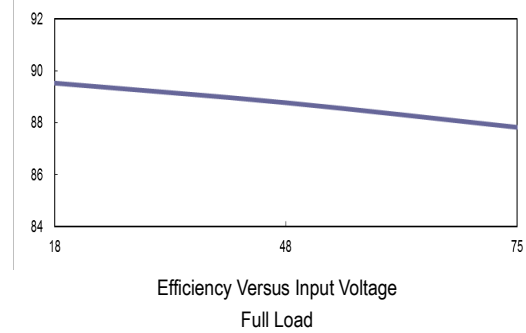


Efficiency Versus Input Voltage Full Load

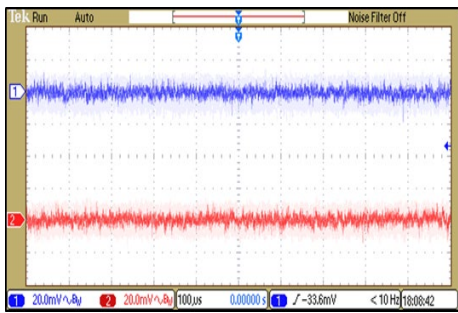


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

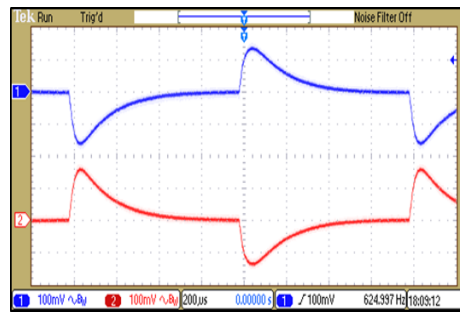


Transient Response to Dynamic Load Change
from 100% to 75% of Full Load ; $V_{in}=V_{in\ nom}$

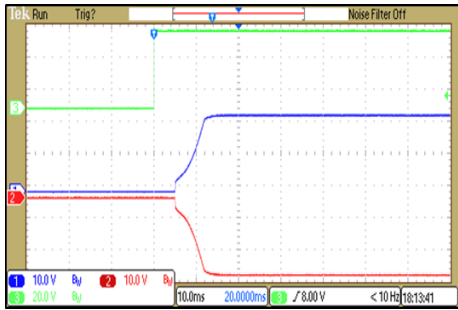

Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

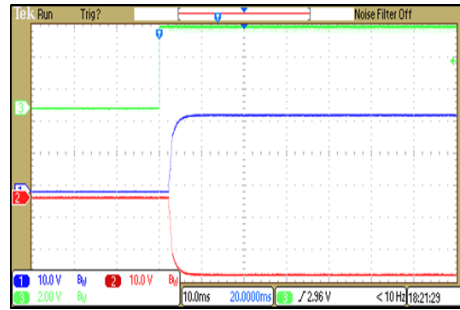

ON/OFF Voltage Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

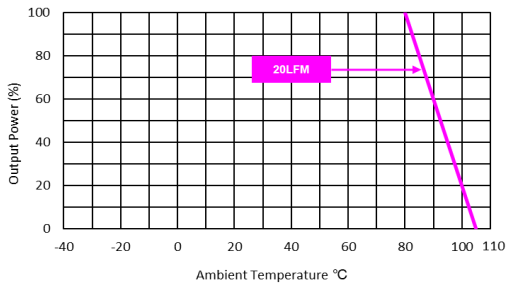

Derating Output Power Versus Ambient Temperature
 $V_{in}=V_{in\ nom}$

Package Specifications

Mechanical Dimensions

Note:

- Screw type Terminal: Wires 1.5mm² max.
- Recommended Terminal Screw tightening torque: 0.2Nm (1.7lb.in.) max.

Pin Connections

Pin	Single Output	Dual Output
1	Remote On/Off	Remote On/Off
2	-Vin	-Vin
3	+Vin	+Vin
4	-Vout	-Vout
5	NC	Common
6	+Vout	+Vout

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)

Physical Characteristics

Case Size	: 79.0x34.0x22.0mm (3.11x1.10x0.87 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 65.76g

Package Specifications with DIN Rail Mounting Bracket (order code AC-DIN-05)


Mechanical Dimensions	DIN-Rail Mounting Kit
<p>Top view dimensions:</p> <ul style="list-style-type: none"> Overall width: 87.6 [3.45] Width to LED: 71.0 [2.80] Width to terminal block: 79.0 [3.11] Terminal block width: 26.0 [1.02] Terminal block height: 34.0 [1.34] Terminal block depth: 34.5 [1.36] LED offset: 21.9 [0.86] 4x Ø2.3 holes <p>Side view dimensions:</p> <ul style="list-style-type: none"> Overall height: 22.0 [0.87] Mounting bracket height: 11.0 [0.43] Mounting bracket offset: 11.6 [0.46] Mounting bracket depth: 10.0 [0.39] Mounting bracket width: 59.0 [2.32] Mounting bracket offset: 58.4 [2.30] Mounting bracket hole offset: 4.0 [0.16] Mounting bracket hole diameter: 3.0 [0.12] 	<p>The DIN-Rail Mounting Kit includes a metal mounting bracket, four screws, and the AC-DIN-05 package. The bracket is designed to slide onto a standard DIN rail and secure the package in place.</p>

Physical Characteristics	
Case Size	: 79.0x34.0x22.0mm (3.11x1.10x0.87 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 108.76g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

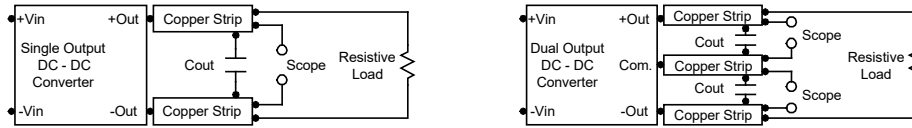

Technical Notes

Remote On/Off


Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 1) during a logic low is -500 μ A.

Overload Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 4.7 μ F for the 24V input devices and a 2.2 μ F for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

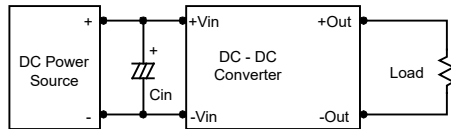

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

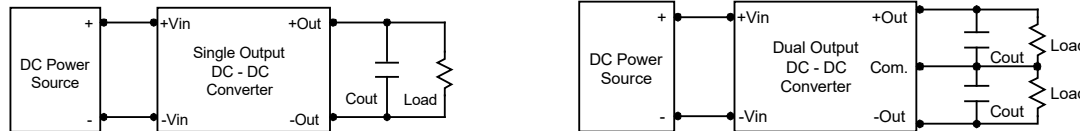


Maximum Capacitive Load

The MKW110C series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations


Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C.

The derating curves are determined from measurements obtained in a test setup.




Remote On/Off Implementation

The positive logic remote ON/OFF control circuit is included. Turns the module ON during logic High on the ON/OFF pin and turns OFF during logic Low. The ON/OFF input signal (Von/off) that referenced to -Vin. If not using the remote ON/OFF feature, please open circuit between ON/OFF pin and -Vin pin to turn the module on.

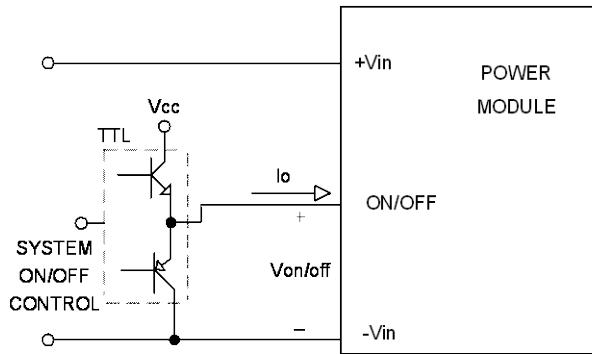


Level Control Using TTL Output

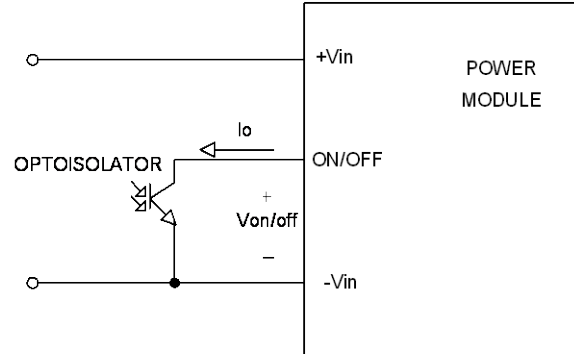

Isolated-Closure Remote ON/OFF

Packaging Information

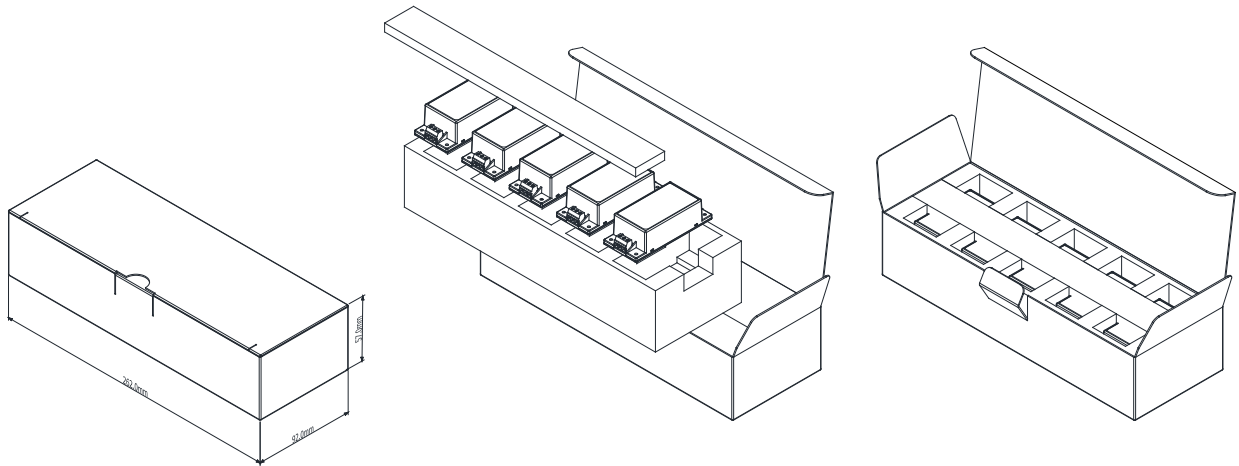

Unit: mm
5 PCS per Box

Part Number Structure								
M	K	WI	10	-	24	S	05	C
Package Type 2" X 1"	Ultra-wide 4:1 Input Voltage Range		Output Power 10 Watt		Input Voltage Range 24: 9 ~ 36 VDC 48: 18 ~ 75 VDC	Output Quantity S: Single D: Dual	Output Voltage 05: 5 VDC 051: 5.1 VDC 12: 12 VDC 15: 15 VDC 24: 24 VDC 48: 48 VDC	Mounting Type Chassis

MTBF and Reliability

The MTBF of MKWI10C series of DC-DC converters has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.

Model	MTBF	Unit
MKWI10-24S05C	4,132,899	Hours
MKWI10-24S051C	4,149,918	
MKWI10-24S12C	4,468,599	
MKWI10-24S15C	4,375,551	
MKWI10-24S24C	4,364,785	
MKWI10-24S48C	4,470,196	
MKWI10-24D12C	4,432,883	
MKWI10-24D15C	4,361,270	
MKWI10-24D24C	4,375,596	
MKWI10-48S05C	4,450,931	
MKWI10-48S051C	4,511,055	
MKWI10-48S12C	4,432,965	
MKWI10-48S15C	4,369,824	
MKWI10-48S24C	4,338,759	
MKWI10-48S48C	4,353,090	
MKWI10-48D12C	4,308,749	
MKWI10-48D15C	4,349,685	
MKWI10-48D24C	4,348,865	