



MINMAX[®]

MA01 Series


Electric Characteristic Note

MA01 Series EC Note

DC-DC CONVERTER 1W, SIP Package

Features

- ▶ Industrial Standard SIP-7 Package
- ▶ Semi-regulated Output Voltage
- ▶ Very High Efficiency up to 88.5%
- ▶ I/O Isolation 1000 VDC
- ▶ Operating Ambient Temp. Range -40°C to +95°C
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval

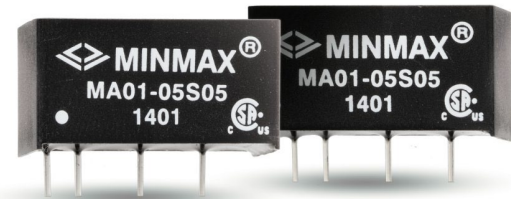

Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

Product Overview

The MINMAX MA01 series is a range of isolated 1W DC-DC converter modules in a small SIP-package. There are 24 models available with 5V, 12V or 24VDC input and single-or dual-output voltages. These products provide have a typical load regulation of 2.5% to 5.0% depending on model.

The MA01 DC-DC converters are a compromise between a more expensive fully regulated converter and a non-regulated converter. They offer the designer a solution for many cost critical applications where the output voltage variation has to be kept in a certain limit under all load conditions.

Table of contents

Model Selection Guide	P2	Test Setup	P29
Input Specifications	P2	Technical Notes	P29
Output Specifications	P2	Packaging Information for Tube	P30
General Specifications	P3	Wave Soldering Considerations	P30
Environmental Specifications	P3	Hand Welding Parameter	P30
Characteristic Curves	P4	Part Number Structure	P31
Package Specifications	P28	MTBF and Reliability	P31
Recommended Pad Layout for Single & Dual Output Converter	P28		

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Load Regulation % (max.)	Reflected Ripple mA(typ.)	Max. capacitive Load μF	Efficiency (typ.)
			Max.	Min.	@Max. Load	@No Load				@Max. Load
			mA	mA	mA(typ.)	mA(typ.)				%
MA01-05S05	5 (4.5 ~ 5.5)	5	200	4	238	30	6.5	7	220	84
MA01-05S09		9	110	2	228	5	87			
MA01-05S12		12	84	1.5	232	5.2	87			
MA01-05S15		15	67	1	230	5	87.5			
MA01-05D05		±5	±100	±2	237	5.2	100#		84.5	
MA01-05D09		±9	±56	±1	234	4.2			86	
MA01-05D12		±12	±42	±0.8	233	4.6			86.5	
MA01-05D15		±15	±34	±0.7	236	4.5			86.5	
MA01-12S05		5	200	4	99	12			5	4
MA01-12S09	9	110	2	95	3.4	86.5				
MA01-12S12	12	84	1.5	95	3.4	88.5				
MA01-12S15	15	67	1	95	2.7	88				
MA01-12D05	±5	±100	±2	99	3.9	100#	84.5			
MA01-12D09	±9	±56	±1	98	2.8		86			
MA01-12D12	±12	±42	±0.8	95	2.9		88.5			
MA01-12D15	±15	±34	±0.7	94	2.6		87.5			
MA01-24S05	5	200	4	50	11		3.7	8	220	
MA01-24S09	9	110	2	48	2.5	86.5				
MA01-24S12	12	84	1.5	48	2.4	87.5				
MA01-24S15	15	67	1	48	2.3	87.5				
MA01-24D05	±5	±100	±2	50	3.7	100#	83.5			
MA01-24D09	±9	±56	±1	49	2.5		86			
MA01-24D12	±12	±42	±0.8	48	2.4		87			
MA01-24D15	±15	±34	±0.7	49	2.3		87			

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Filter	All Models	Internal Capacitor			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.05	±1.2	%
Load Regulation	Io=20% to 100%	See Model Selection Guide			
Ripple & Noise	0-20MHz Bandwidth	---	30	60	mV _{P-P}
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	0.5 Second Max., Automatic Recovery				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1000	---	---	VDC
	1 Second	1200	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	40	60	120	pF
Switching Frequency		50	100	120	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-report)				

Environmental Specifications


Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	°C
Case Temperature	---	+95	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

Notes


- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 Specifications are subject to change without notice.

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-05S05

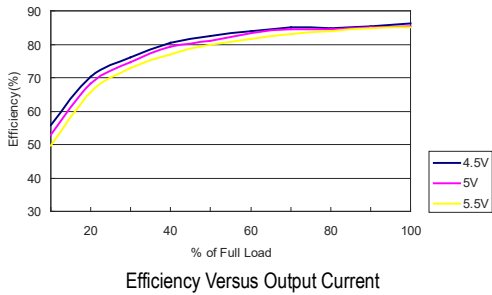


Efficiency Versus Output Current

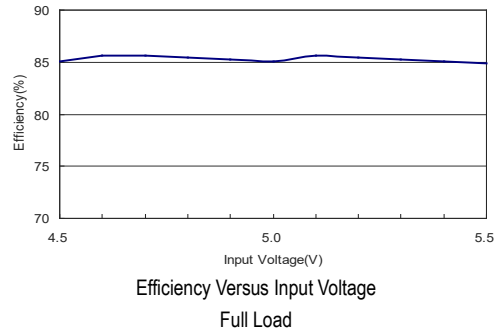


Efficiency Versus Input Voltage Full Load

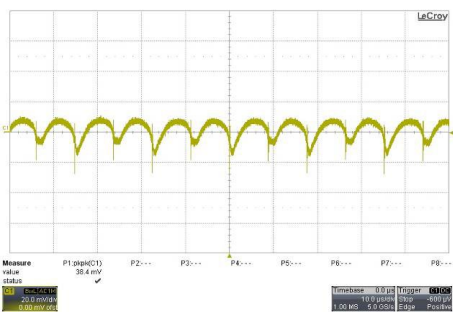

Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

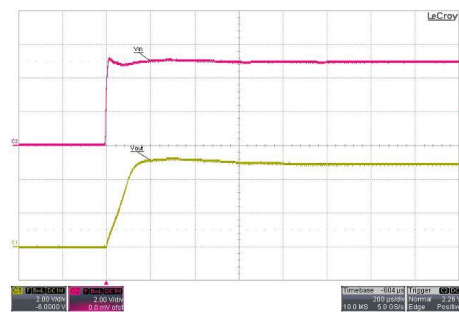






Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in nom}$; Full Load

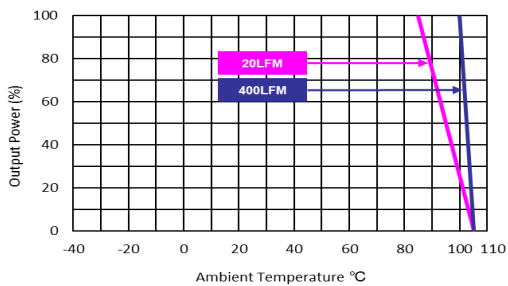

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MA01-05S09

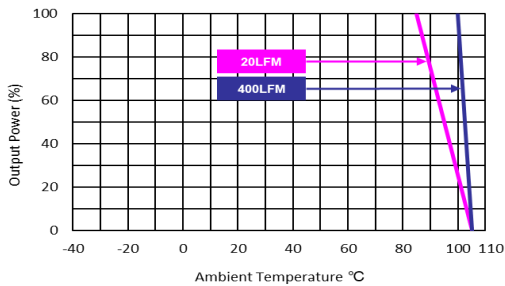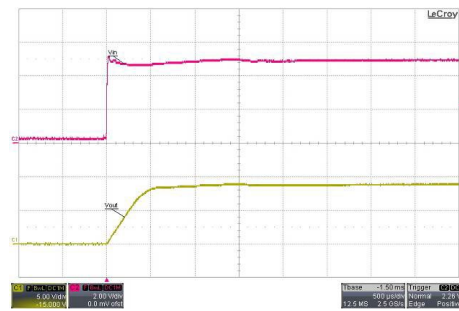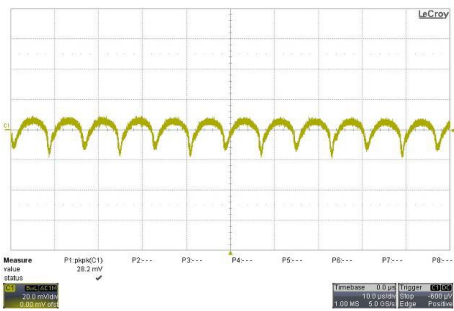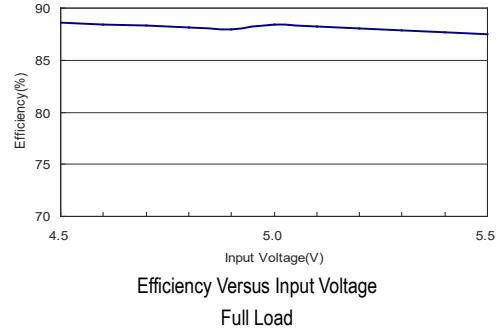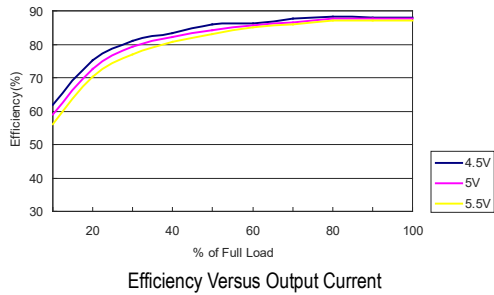


Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-05S12

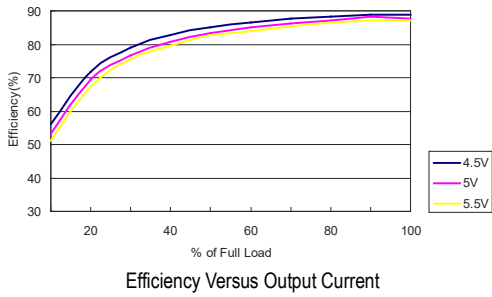


Efficiency Versus Output Current

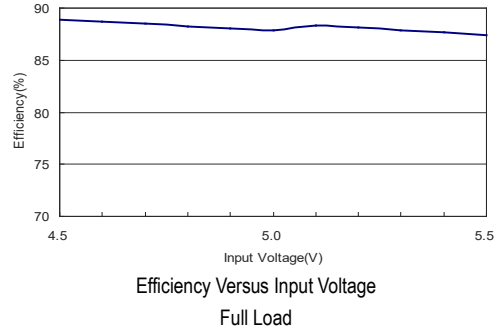


Efficiency Versus Input Voltage Full Load

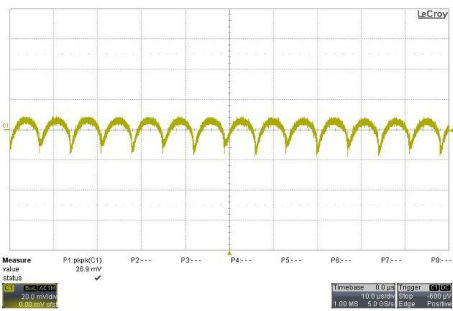

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

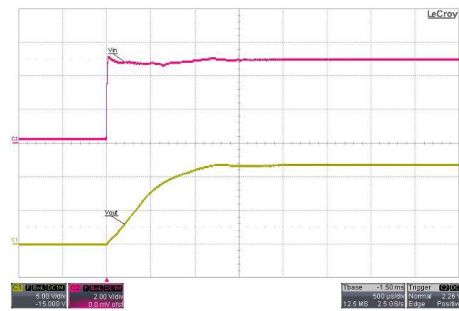






Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

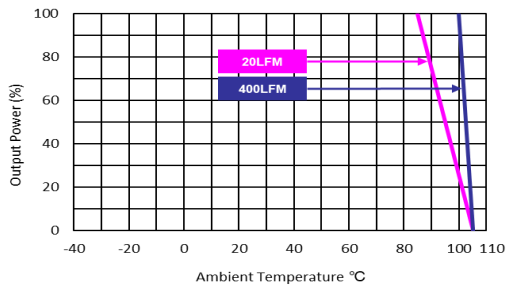

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MA01-05S15

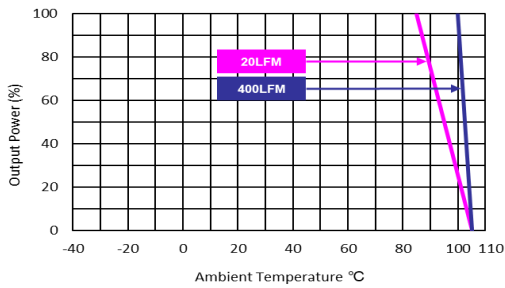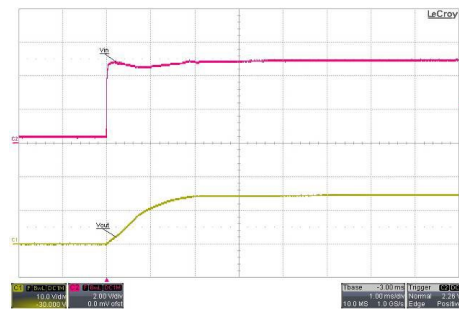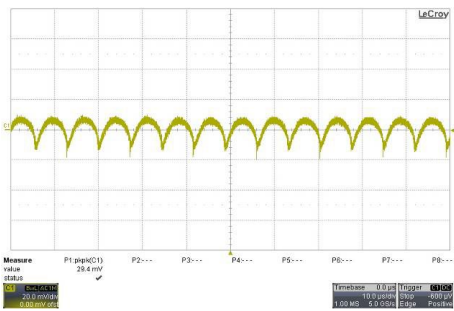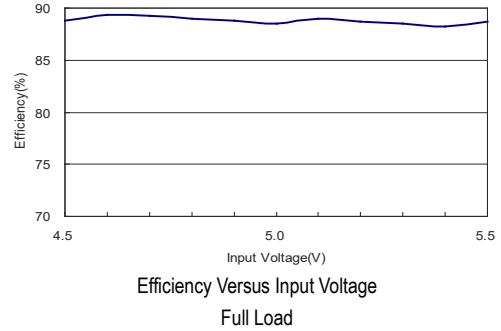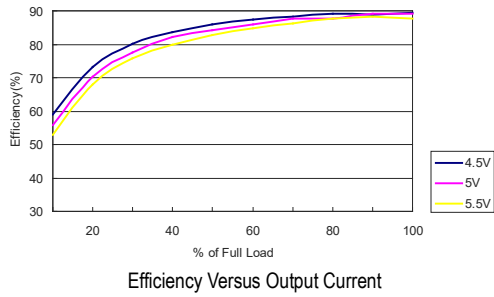


Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-05D05

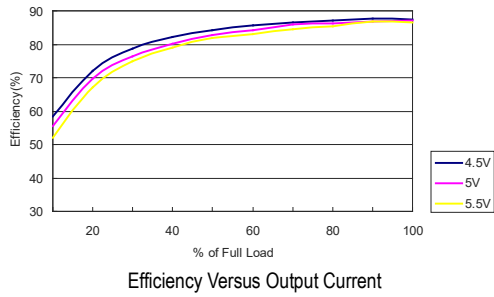


Efficiency Versus Output Current

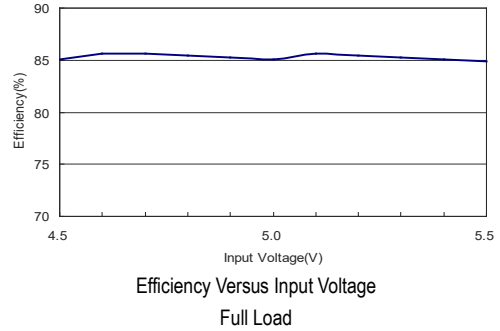


Efficiency Versus Input Voltage Full Load

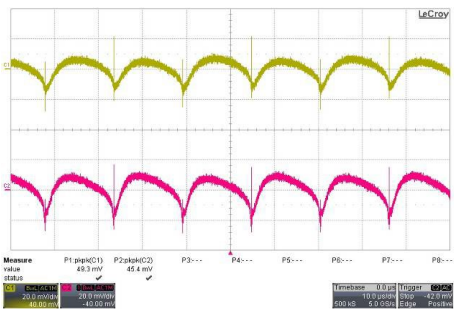

Typical Output Ripple and Noise
V_{in}=V_{in nom}; Full Load

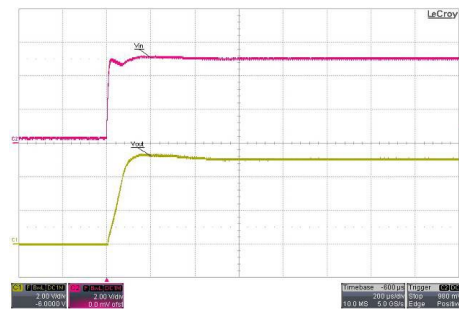






Typical Input Start-Up and Output Rise Characteristic
V_{in}=V_{in nom}; Full Load

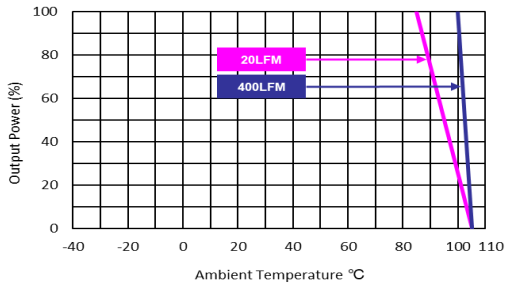

Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=V_{in nom}


Characteristic Curves

All test conditions are at 25°C. The figures are identical for MA01-05D09

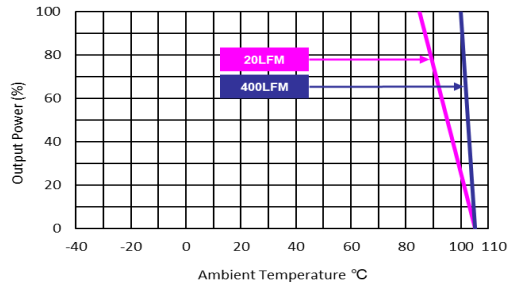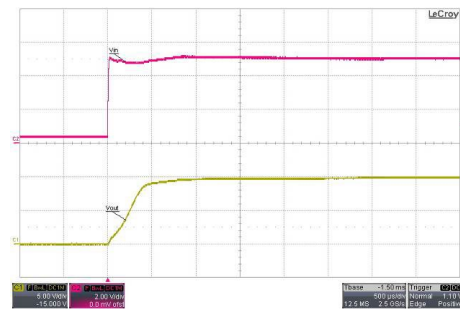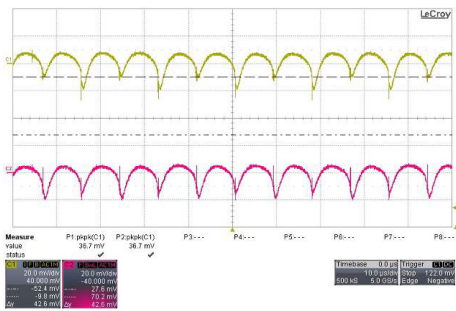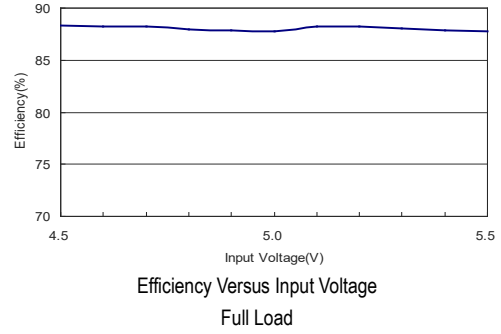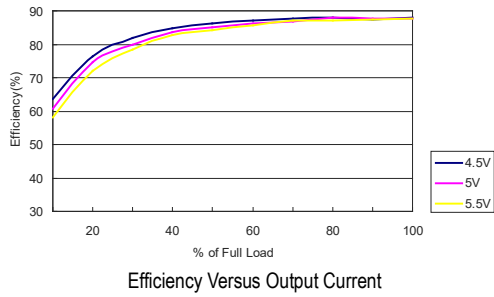


Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-05D12

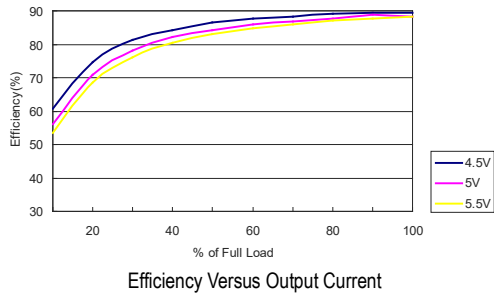


Efficiency Versus Output Current

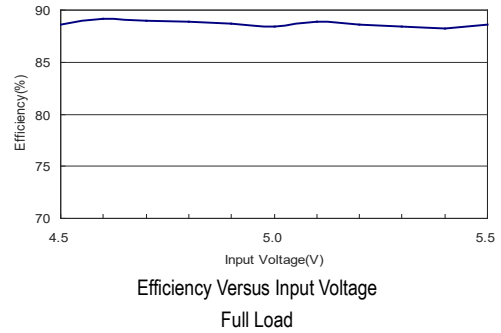


Efficiency Versus Input Voltage
Full Load

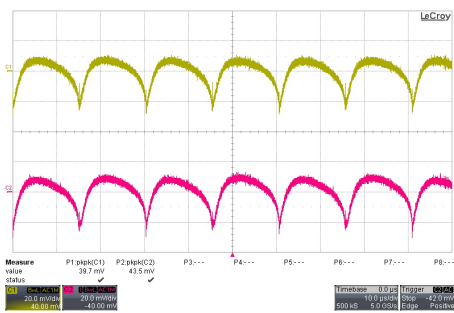

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

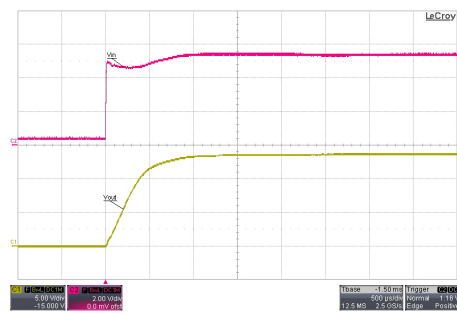






Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

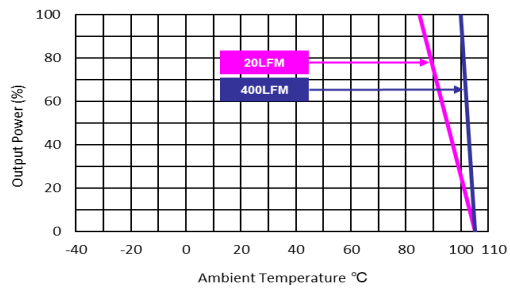

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MA01-05D15

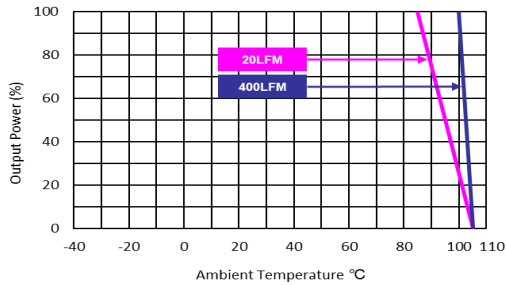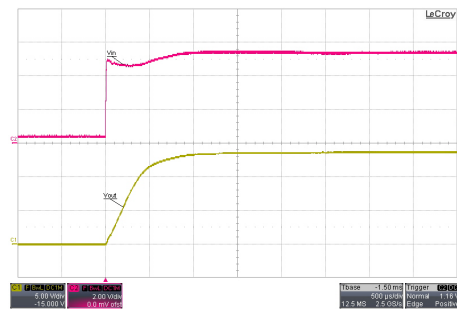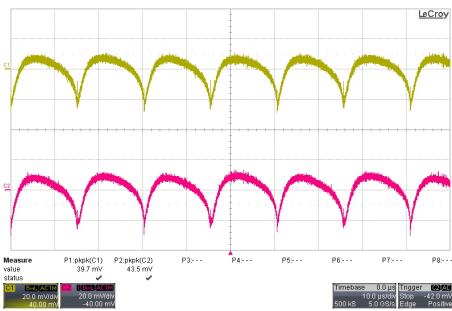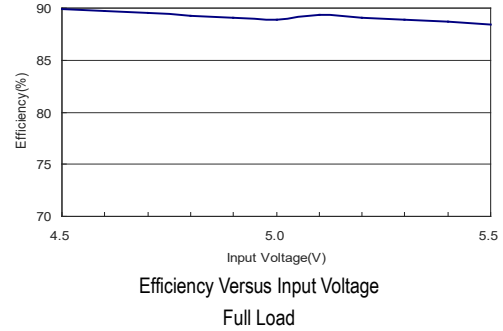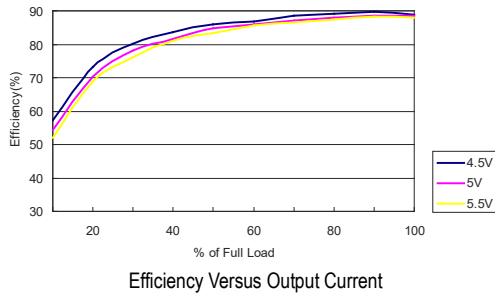


Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12S05

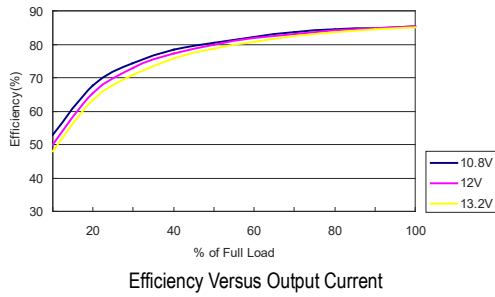

Efficiency Versus Output Current

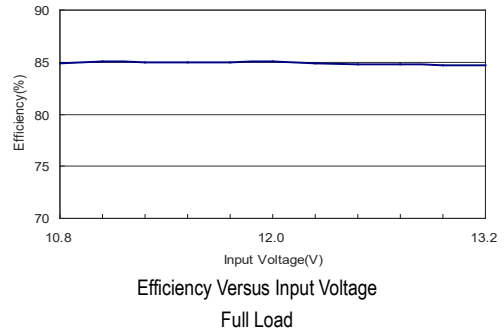


Efficiency Versus Input Voltage Full Load

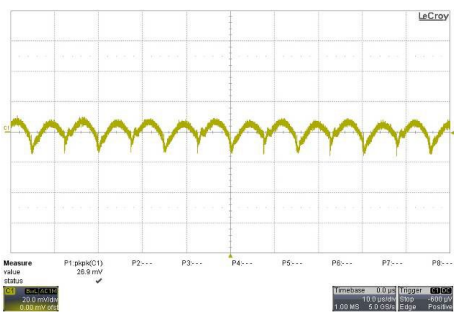

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

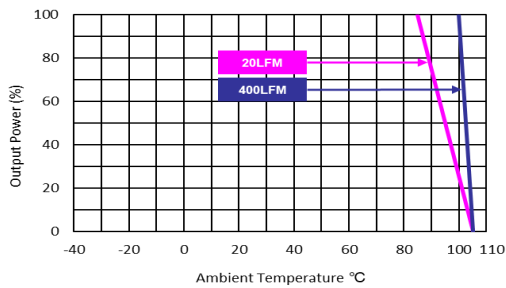


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12S09

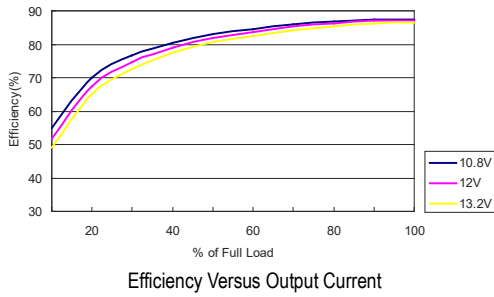


Efficiency Versus Output Current

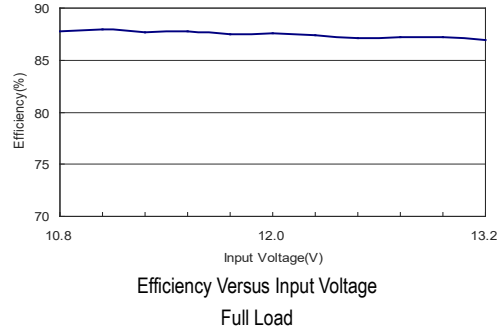


Efficiency Versus Input Voltage Full Load

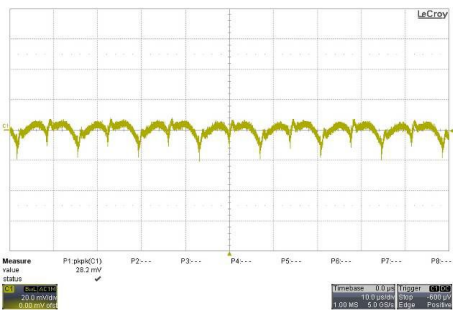

Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

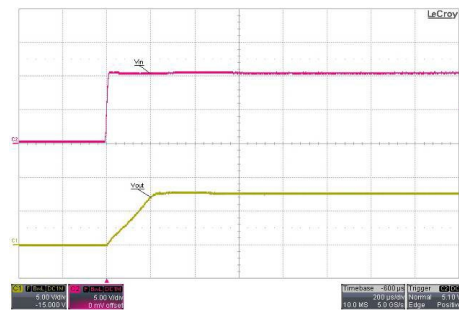


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in nom}$; Full Load

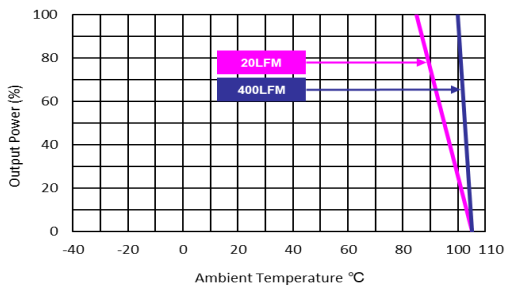


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12S12

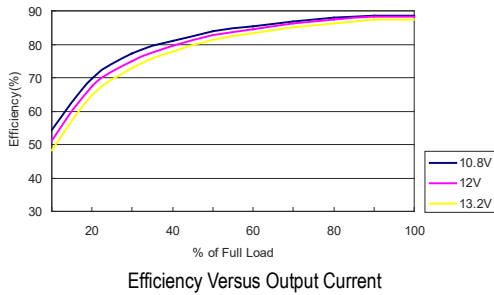


Efficiency Versus Output Current

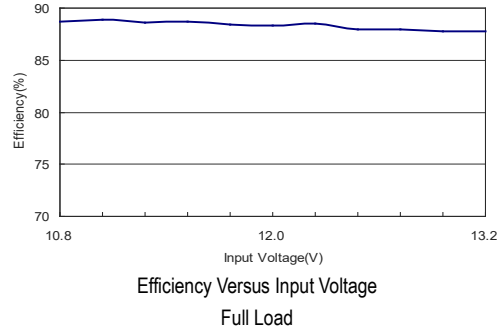


Efficiency Versus Input Voltage Full Load

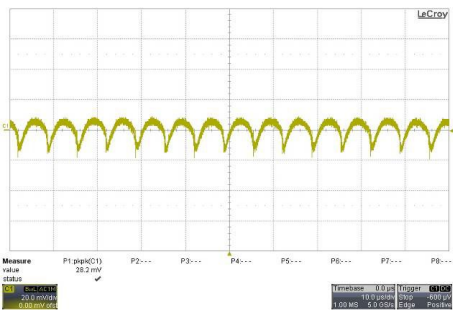

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

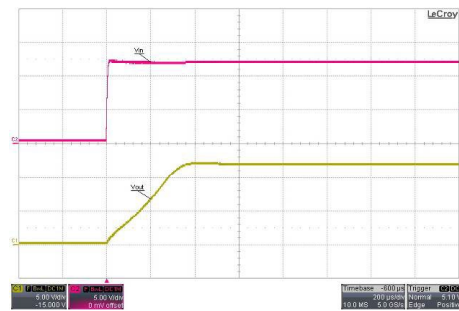


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

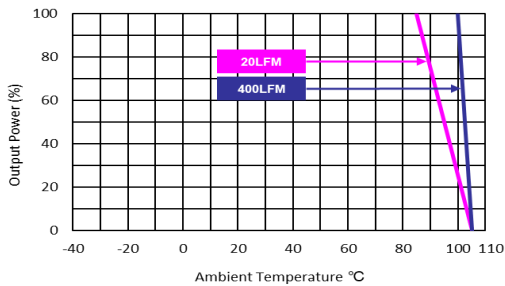


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12S15

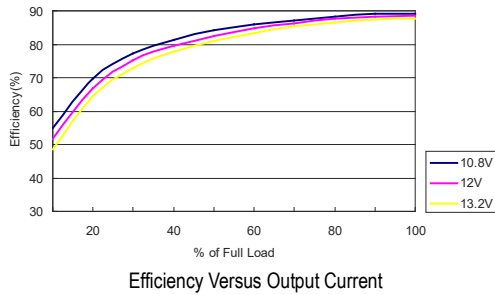


Efficiency Versus Output Current

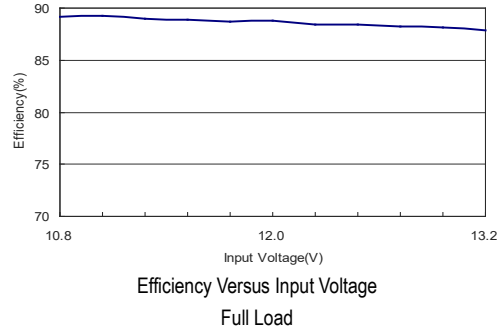


Efficiency Versus Input Voltage Full Load

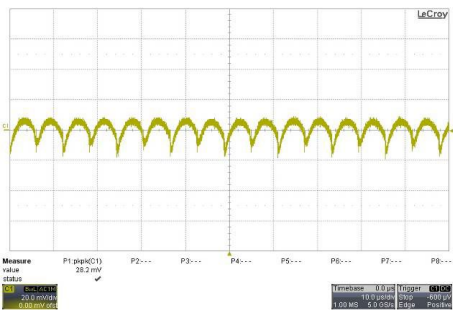

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

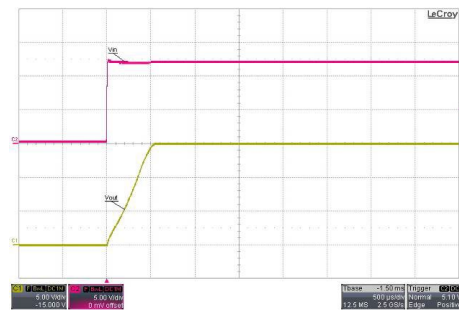


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

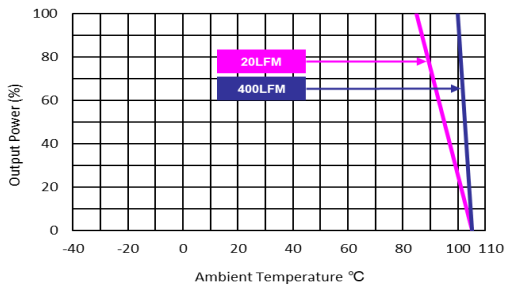


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12D05

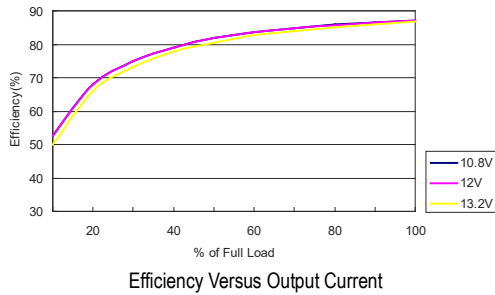

Efficiency Versus Output Current

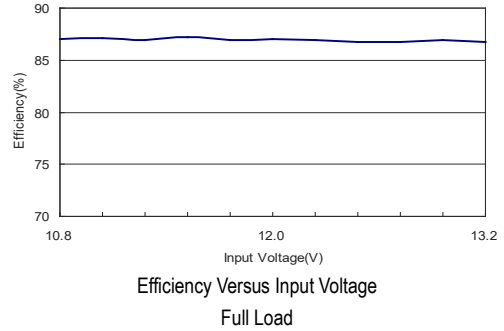


Efficiency Versus Input Voltage Full Load

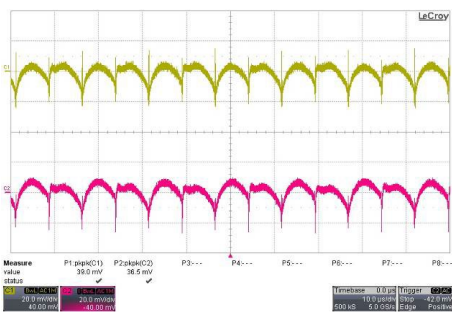

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

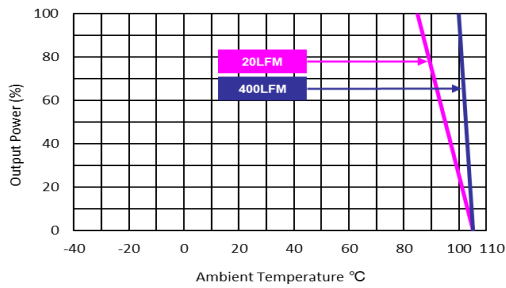


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12D09

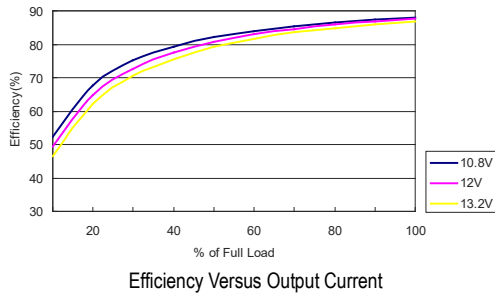


Efficiency Versus Output Current

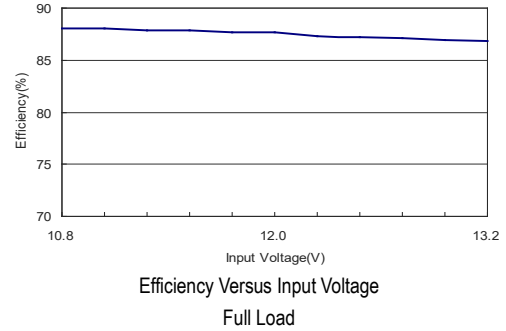


Efficiency Versus Input Voltage Full Load

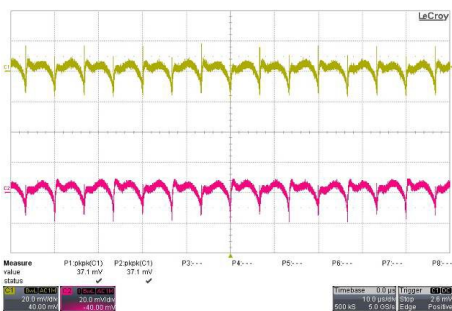

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

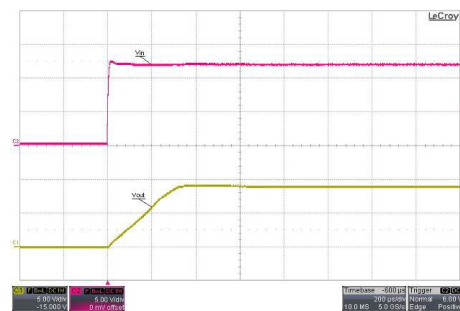


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

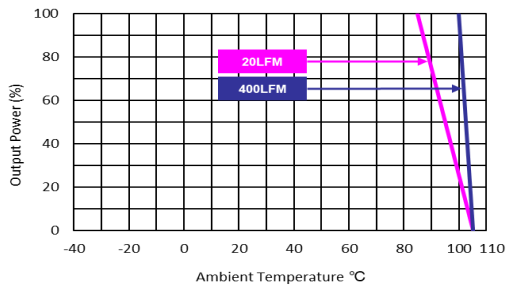


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12D12

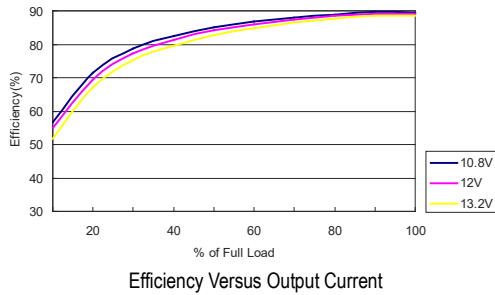


Efficiency Versus Output Current

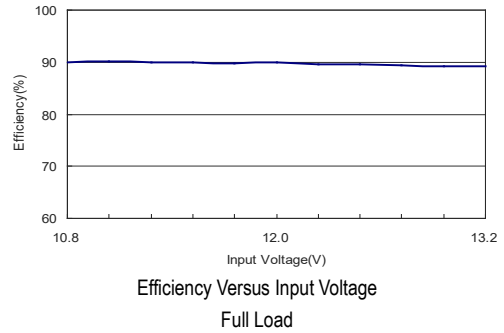


Efficiency Versus Input Voltage Full Load

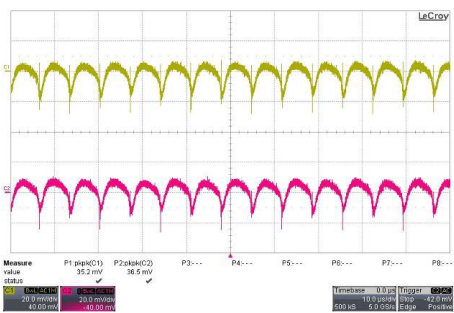

Typical Output Ripple and Noise
V_{in}=V_{in nom}; Full Load

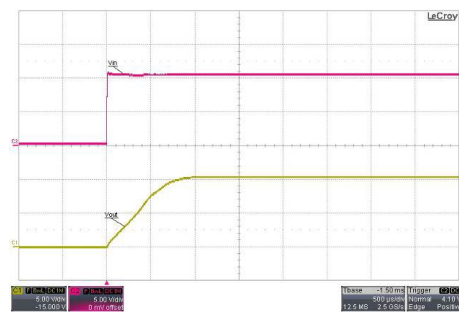


Typical Input Start-Up and Output Rise Characteristic
V_{in}=V_{in nom}; Full Load

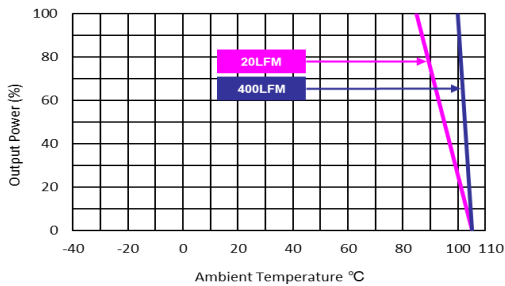


Derating Output Current Versus Ambient Temperature and Airflow
V_{in}=V_{in nom}

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-12D15

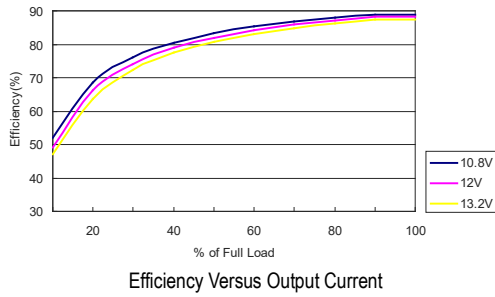


Efficiency Versus Output Current

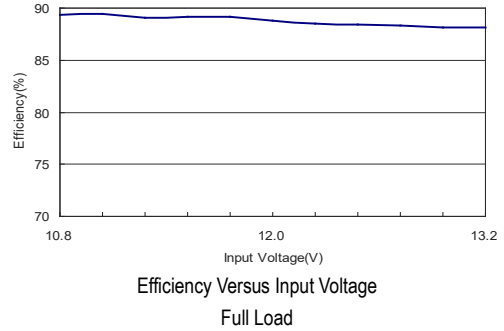


Efficiency Versus Input Voltage Full Load

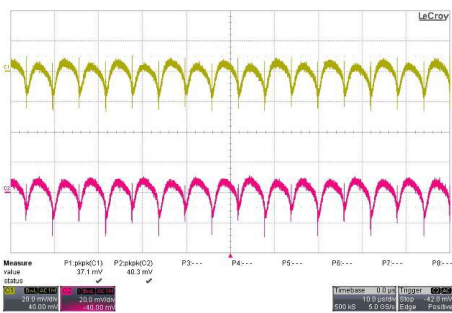

Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

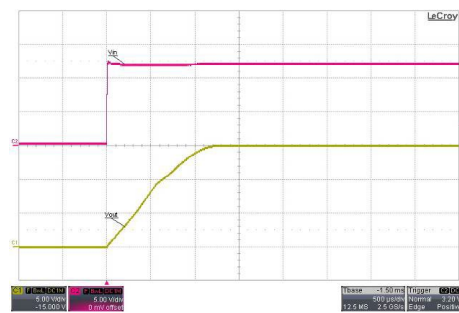


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in nom}$; Full Load

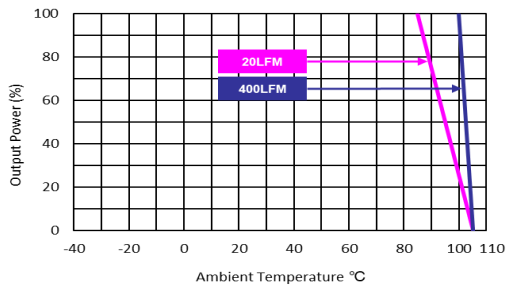


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24S05

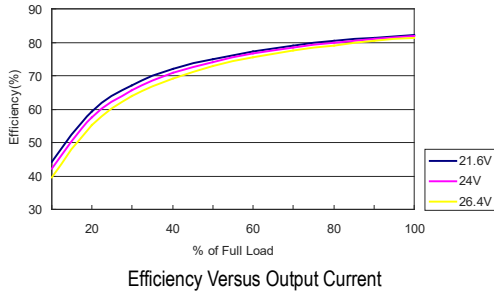

Efficiency Versus Output Current

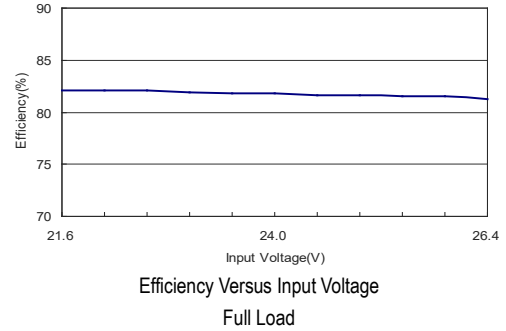


Efficiency Versus Input Voltage Full Load

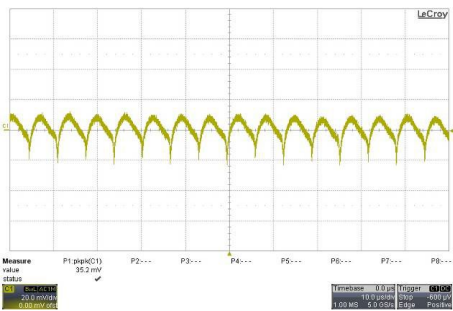

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

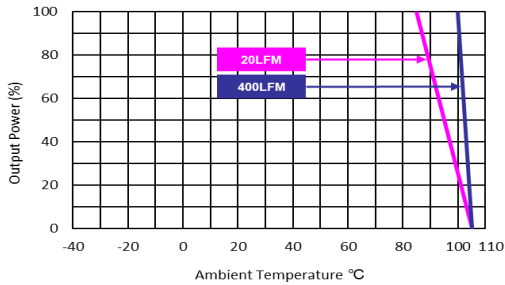


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24S09

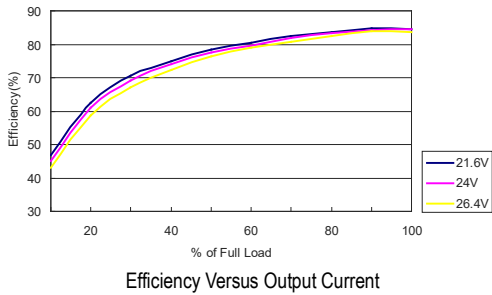


Efficiency Versus Output Current

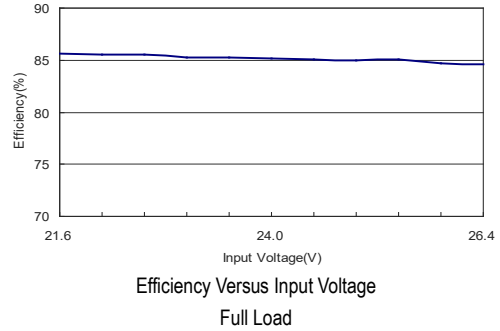


Efficiency Versus Input Voltage Full Load

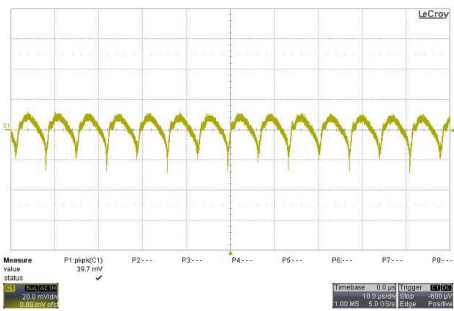

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

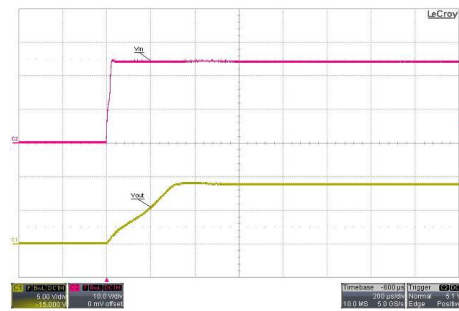




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

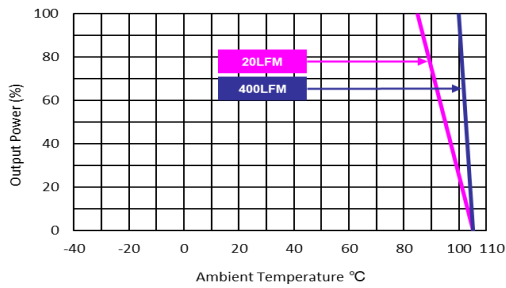


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24S12

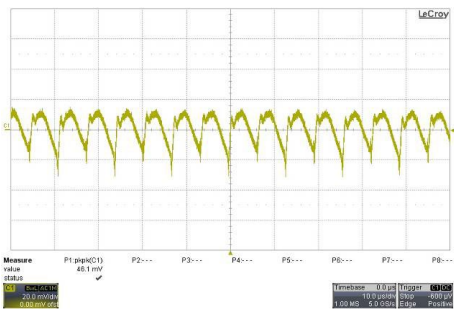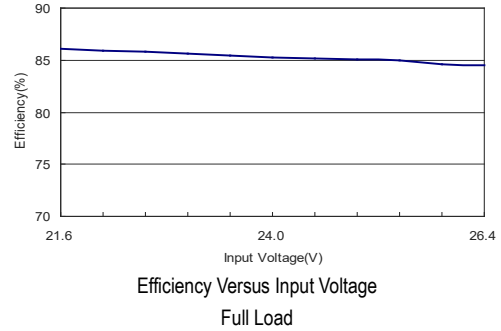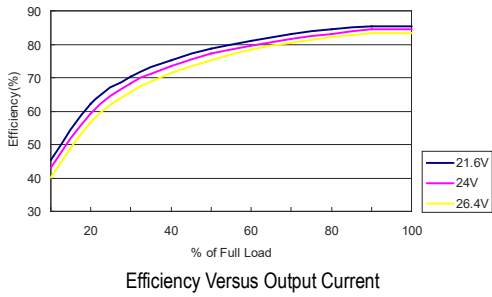

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

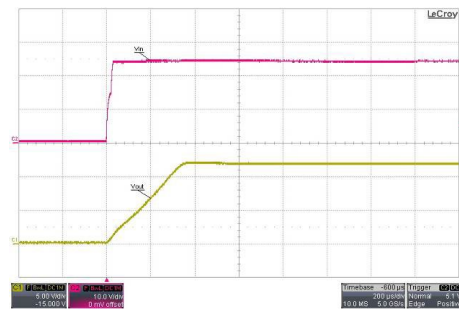


Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

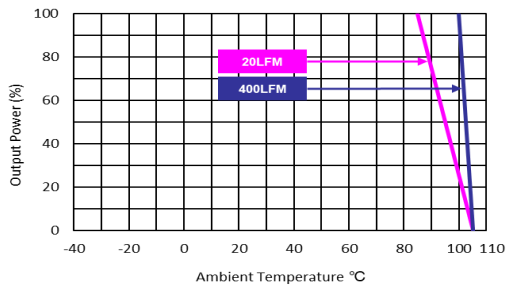


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24S15

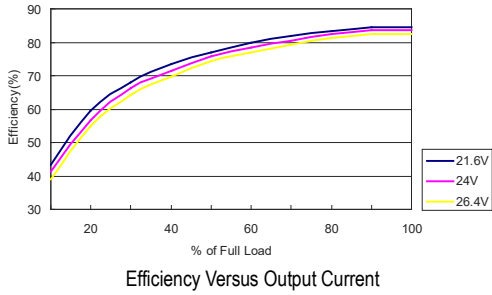


Efficiency Versus Output Current

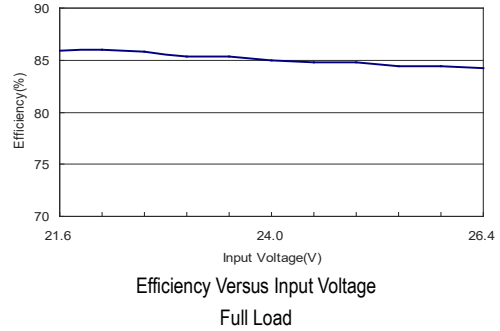


Efficiency Versus Input Voltage Full Load

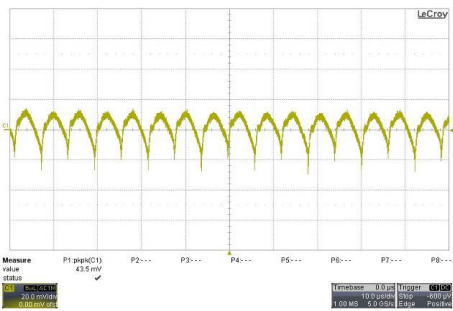

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

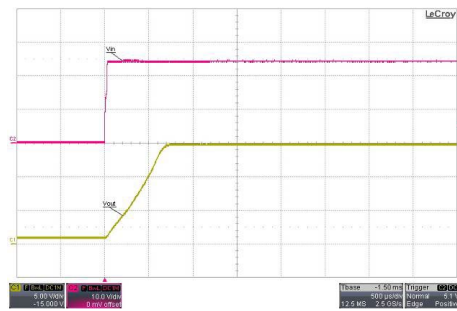




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

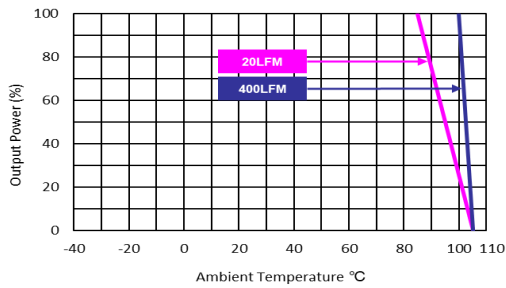


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24D05

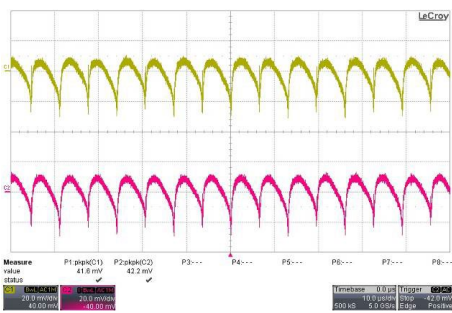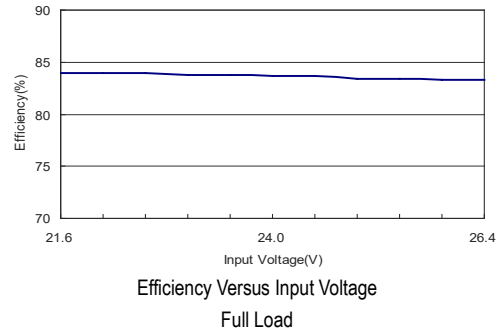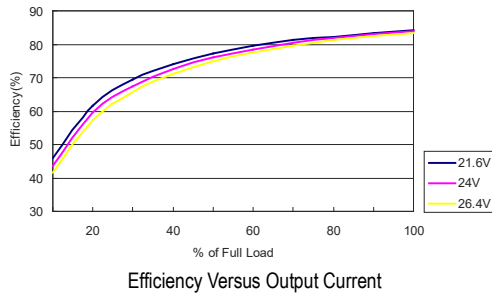

Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

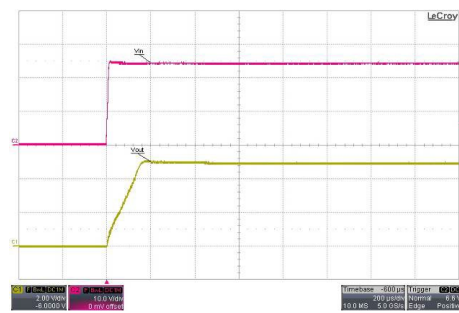




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in nom}$; Full Load

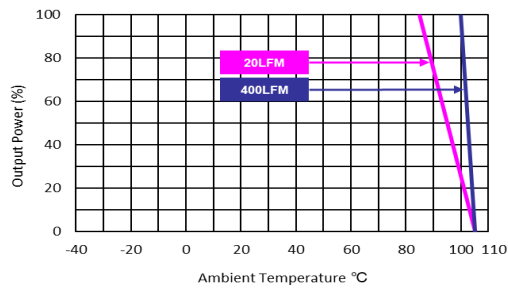


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24D09

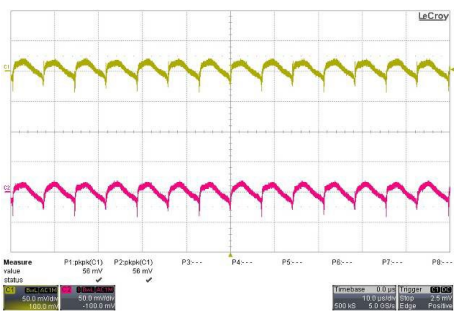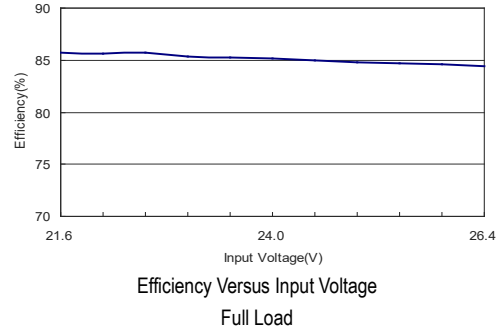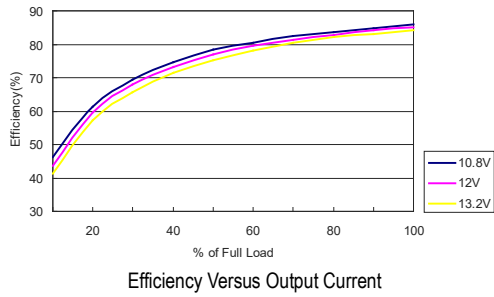

Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

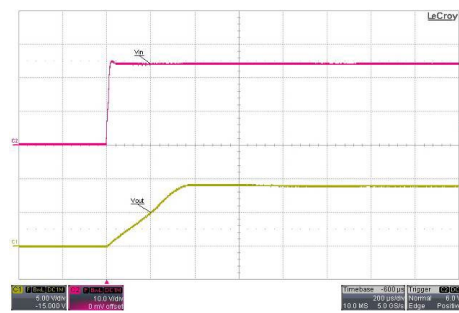




Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in\ nom}$; Full Load

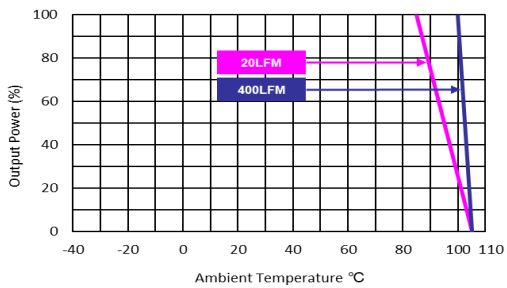


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MA01-24D12

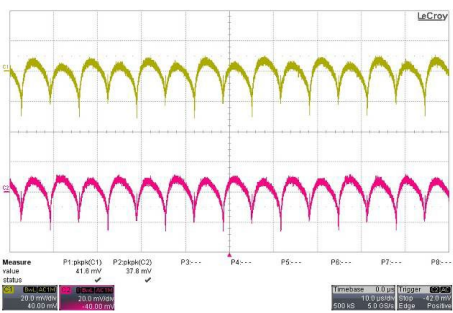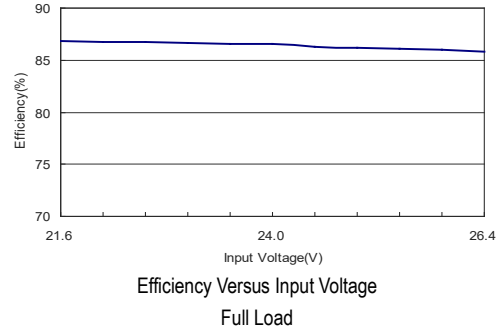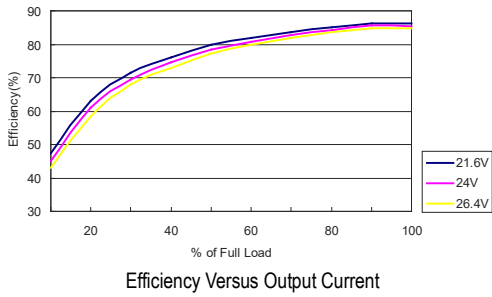

Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

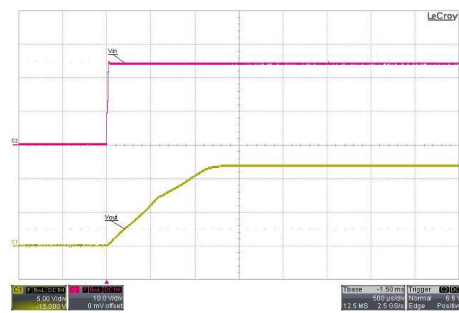






Typical Input Start-Up and Output Rise Characteristic
 $V_{in}=V_{in nom}$; Full Load

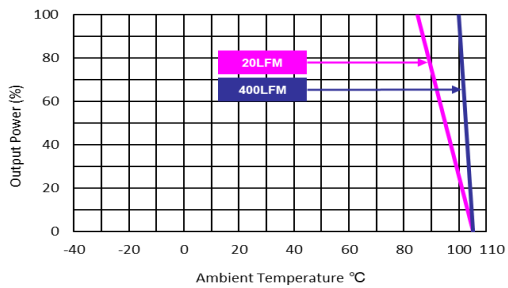

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MA01-24D15

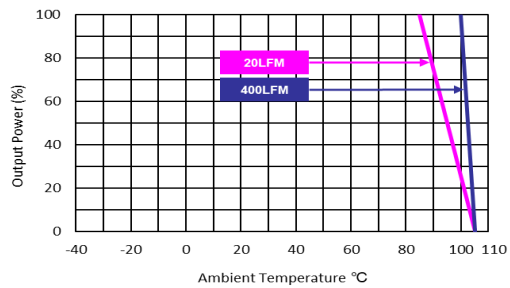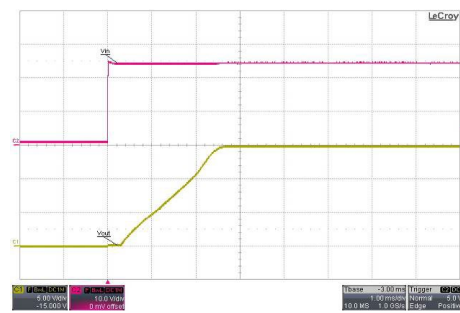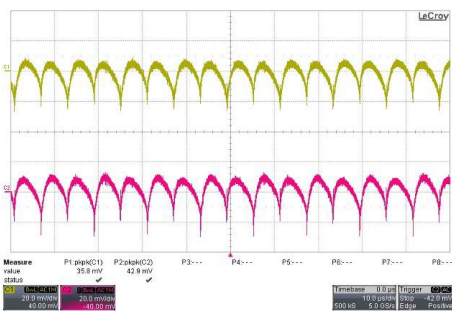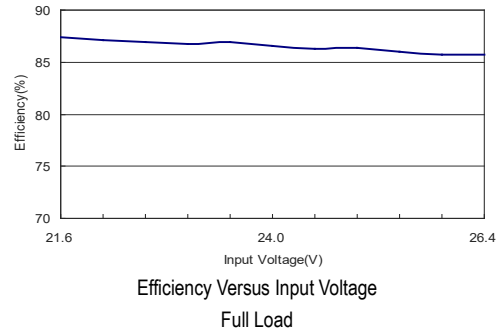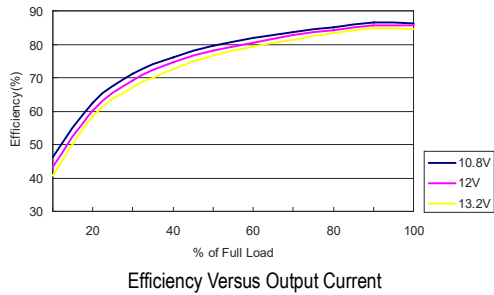

Package Specifications

Mechanical Dimensions

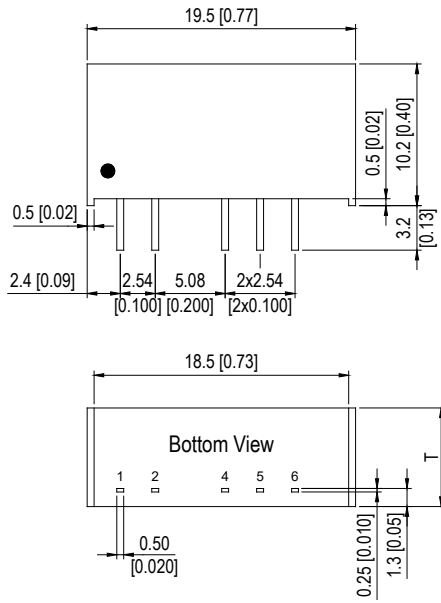

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
4	-Vout	-Vout
5	No Pin	Common
6	+Vout	+Vout

T=6.1(0.24) for 5V & 12V Input Models


T=7.1(0.28) for 24V Input Models

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pins ±0.05(±0.002)

Physical Characteristics

Case Size (5&12V Input)	: 19.5x6.1x10.2mm (0.77x0.24x0.40 inches)
Case Size (24V Input)	: 19.5x7.1x10.2mm (0.77x0.28x0.40 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Alloy 42
Weight (5&12V Input)	: 2.2g
Weight (24V Input)	: 2.6g


Recommended Pad Layout for Single & Dual Output Converter

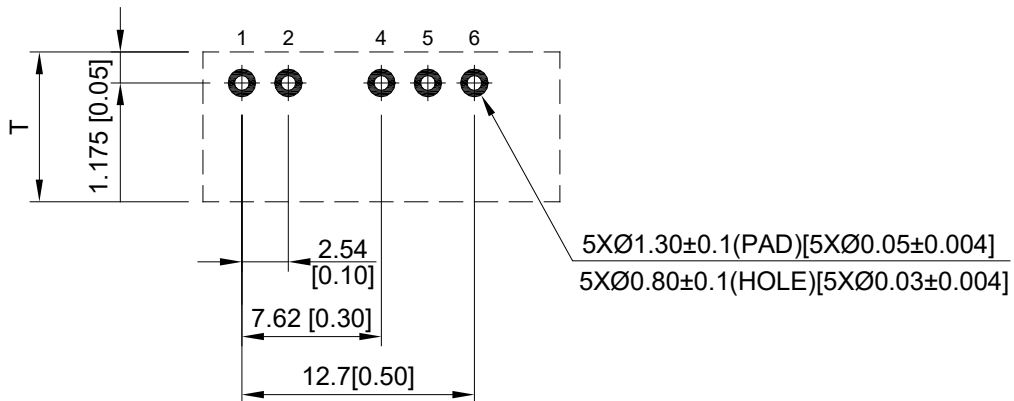

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} ($10\mu H$) and C_{in} ($1\mu F$, $ESR < 1.0\Omega$ at 100 kHz) to simulate source impedance. Capacitor C_{in} offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is $0\text{-}500\text{ kHz}$.

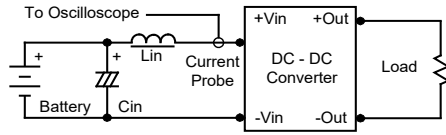

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} $0.33\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is $0\text{-}20\text{ MHz}$. Position the load between 50 mm and 75 mm from the DC-DC Converter.

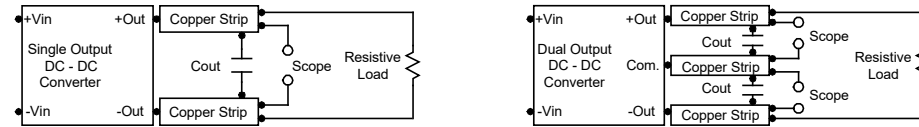


Technical Notes

Maximum Capacitive Load

The MA01 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend $100\mu F$ maximum capacitive load for dual outputs and $220\mu F$ capacitive load for single outputs. The maximum capacitance can be found in the data sheet.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is commended to use a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 kHz) capacitor of a $2.2\mu F$ for the $5V$ input devices, a $1.0\mu F$ for the $12V$ input devices and a $0.47\mu F$ for the $24V$ devices.

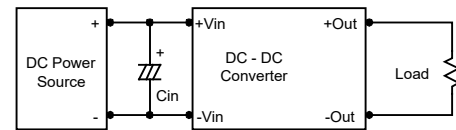


Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $1.0\mu F$ capacitors at the output.

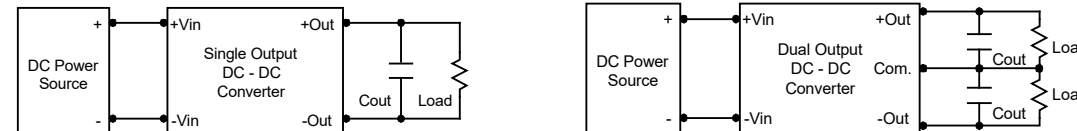


Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $95^\circ C$. The derating curves are determined from measurements obtained in a test setup.




Packaging Information for Tube

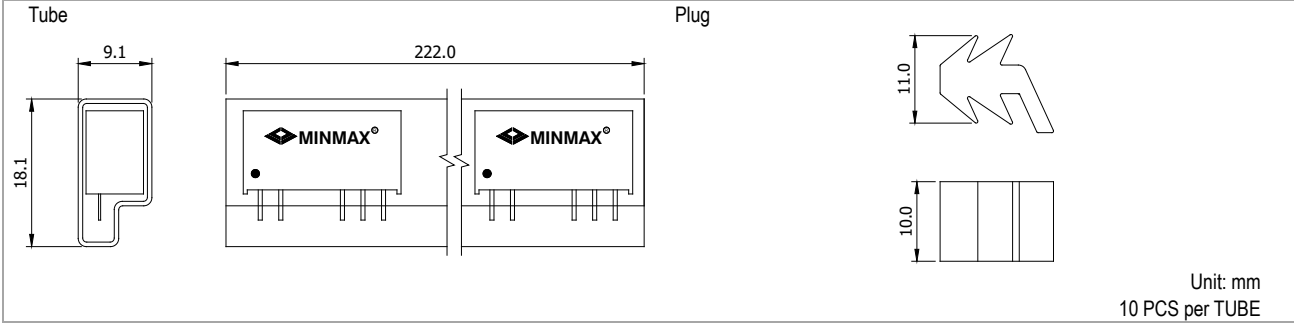

Wave Soldering Considerations

Lead free wave solder profile

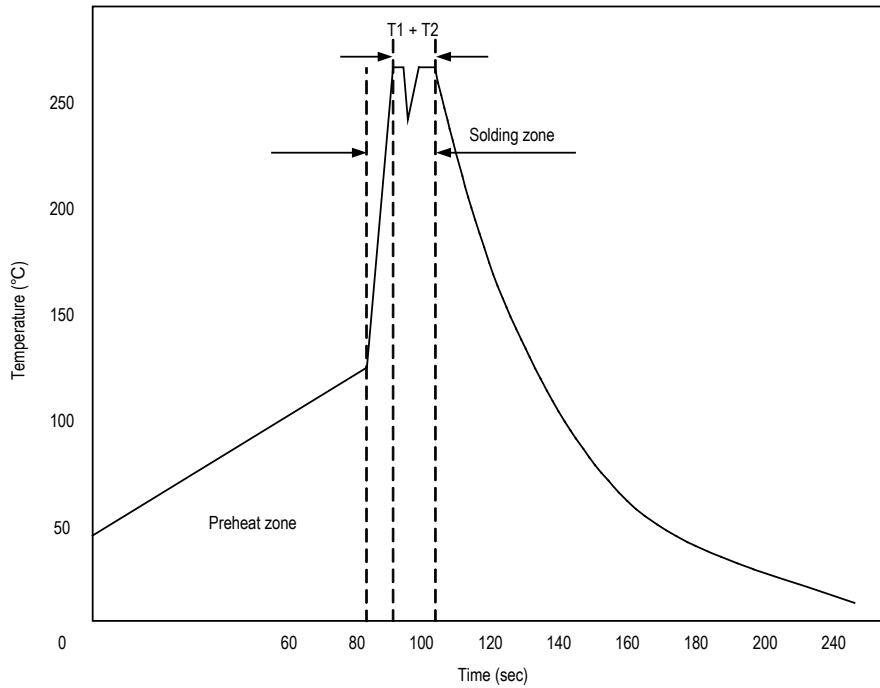

Zone	Reference Parameter
Preheat	Rise temp. speed : 3°C/sec max.
zone	Preheat temp. : 100~130°C
Actual	Peak temp. : 250~260°C
heating	Peak time(T1+T2) : 4~6 sec

Hand Welding Parameter

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C

Part Number Structure

M	A	01	-	05	S	05																																							
<table border="1"> <tr> <td>Package Type</td> <td>Output Power</td> </tr> <tr> <td>SIP-7</td> <td>1 Watt</td> </tr> </table>		Package Type	Output Power	SIP-7	1 Watt	<table border="1"> <tr> <td colspan="3">Input Voltage Range</td> </tr> <tr> <td>05:</td> <td>4.5 ~</td> <td>5.5 VDC</td> </tr> <tr> <td>12:</td> <td>10.8 ~</td> <td>13.2 VDC</td> </tr> <tr> <td>24:</td> <td>21.6 ~</td> <td>26.4 VDC</td> </tr> </table>			Input Voltage Range			05:	4.5 ~	5.5 VDC	12:	10.8 ~	13.2 VDC	24:	21.6 ~	26.4 VDC	<table border="1"> <tr> <td colspan="2">Output Quantity</td> </tr> <tr> <td>S:</td> <td>Single</td> </tr> <tr> <td>D:</td> <td>Dual</td> </tr> </table>		Output Quantity		S:	Single	D:	Dual	<table border="1"> <tr> <td colspan="3">Output Voltage</td> </tr> <tr> <td>05:</td> <td>5</td> <td>VDC</td> </tr> <tr> <td>09:</td> <td>9</td> <td>VDC</td> </tr> <tr> <td>12:</td> <td>12</td> <td>VDC</td> </tr> <tr> <td>15:</td> <td>15</td> <td>VDC</td> </tr> </table>		Output Voltage			05:	5	VDC	09:	9	VDC	12:	12	VDC	15:	15	VDC
Package Type	Output Power																																												
SIP-7	1 Watt																																												
Input Voltage Range																																													
05:	4.5 ~	5.5 VDC																																											
12:	10.8 ~	13.2 VDC																																											
24:	21.6 ~	26.4 VDC																																											
Output Quantity																																													
S:	Single																																												
D:	Dual																																												
Output Voltage																																													
05:	5	VDC																																											
09:	9	VDC																																											
12:	12	VDC																																											
15:	15	VDC																																											

MTBF and Reliability

The MTBF of MA01 series of DC-DC converters has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.

Model	MTBF	Unit
MA01-05S05	5,301,524	Hours
MA01-05S09	3,944,773	
MA01-05S12	2,857,143	
MA01-05S15	2,343,292	
MA01-05D05	5,194,805	
MA01-05D09	3,988,036	
MA01-05D12	2,944,424	
MA01-05D15	2,419,842	
MA01-12S05	5,333,334	
MA01-12S09	3,962,358	
MA01-12S12	2,865,330	
MA01-12S15	2,348,796	
MA01-12D05	5,225,343	
MA01-12D09	4,006,009	
MA01-12D12	2,953,119	
MA01-12D15	2,425,713	
MA01-24S05	4,901,961	
MA01-24S09	3,838,771	
MA01-24S12	2,737,850	
MA01-24S15	2,262,443	
MA01-24D05	4,810,583	
MA01-24D09	3,757,633	
MA01-24D12	2,817,894	
MA01-24D15	2,333,722	