



## MKW15M Series

DC-DC CONVERTER 15W, Reinforced Insulation, Medical Safety

## Electric Characteristic Note

### Features

- ▶ Industrial Standard 2" X 1" Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 4200VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- ▶ Low I/O Leakage Current < 5 $\mu$ A
- ▶ Operating Ambient Temp. Range -40 $^{\circ}$ C to +85 $^{\circ}$ C
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN 55011 Class A Approved
- ▶ Medical EMC Standard with 4<sup>th</sup> Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- ▶ Medical Safety with 2xMOPP per 3<sup>rd</sup> Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking



### Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

### Product Overview

The MINMAX MKW15M series is a range of high performance 15W medical approved DC-DC converter within encapsulated 2" x 1" package which specifically design for medical applications. There are 21 models available for input voltage of 12, 24, 48VDC with wide 2:1 input range and fixed output voltage. The I/O isolation is specified for 4200VAC with reinforced insulation, which rated for 300Vrms working voltage. Further features include under-voltage, overload, over voltage, short circuit protection, no min. load requirement, EMI emission EN 55011 class A approved, low I/O leakage current 5 $\mu$ A max. and operating ambient temp. range by -40 $^{\circ}$ C to 85 $^{\circ}$ C by high efficiency up to 90%. MKW15M series conform to 4<sup>th</sup> edition medical EMC standard, medical safety with 2xMOPP (Means Of Patient Protection) per 3<sup>rd</sup> edition of IEC/EN 60601-1 & ANSI/AAMI ES 60601-1 approved. The MKW15M series offer the best solution for demanding applications in medical instrument requesting a certified supplementary and reinforced insulation system to comply with latest medical safety approval for 2xMOPP requirement.

### Table of contents

Model Selection Guide.....	P2	Package Specifications.....	P26
Input Specifications.....	P2	Recommended Pad Layout for Single & Dual Output Converter.....	P26
Output Specifications.....	P2	Test Setup.....	P27
Isolation, Safety Standards.....	P3	Technical Notes.....	P27
General Specifications.....	P3	Packaging Information.....	P28
EMC Specifications.....	P3	Wave Soldering Considerations.....	P28
Environmental Specifications.....	P4	Part Number Structure.....	P29
Characteristic Curves.....	P5	MTBF and Reliability.....	P29

Model Selection Guide									
Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Reflected Ripple Current	Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
				Max.	@Max. Load				@No Load
	VDC	VDC	mA	mA(typ.)	mA (typ.)	mA(typ.)	VDC	μF	%
MKW15-12S05M	12 (9 ~ 18)	5	3000	1453	20	100	6.2	5100	86
MKW15-12S051M		5.1	3000	1483			6.2		86
MKW15-12S12M		12	1250	1404			15	870	89
MKW15-12S15M		15	1000	1420			18	560	88
MKW15-12S24M		24	625	1420			27	220	88
MKW15-12D12M		±12	±625	1420			±15	440#	88
MKW15-12D15M		±15	±500	1404			±18	280#	89
MKW15-24S05M	24 (18 ~ 36)	5	3000	710	15	50	6.2	5100	88
MKW15-24S051M		5.1	3000	724			6.2		88
MKW15-24S12M		12	1250	702			15	870	89
MKW15-24S15M		15	1000	702			18	560	89
MKW15-24S24M		24	625	694			27	220	90
MKW15-24D12M		±12	±625	694			±15	440#	90
MKW15-24D15M		±15	±500	702			±18	280#	89
MKW15-48S05M	48 (36 ~ 75)	5	3000	355	10	30	6.2	5100	88
MKW15-48S051M		5.1	3000	362			6.2		88
MKW15-48S12M		12	1250	355			15	870	88
MKW15-48S15M		15	1000	347			18	560	90
MKW15-48S24M		24	625	351			27	220	89
MKW15-48D12M		±12	±625	351			±15	440#	89
MKW15-48D15M		±15	±500	355			±18	280#	88

# For each output

Input Specifications						
Parameter	Conditions / Model	Min.	Typ.	Max.	Unit	
Input Surge Voltage (100 ms max.)	12V Input Models	-0.7	---	25	VDC	
	24V Input Models	-0.7	---	50		
	48V Input Models	-0.7	---	100		
Start-Up Threshold Voltage	12V Input Models	---	---	9		
	24V Input Models	---	---	18		
	48V Input Models	---	---	36		
Under Voltage Shutdown	12V Input Models	---	7.5	---		
	24V Input Models	---	15	---		
	48V Input Models	---	33	---		
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	---	30	ms	
Input Filter	All Models	Internal Pi Type				

Output Specifications							
Parameter	Conditions / Model		Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy			---	---	±1.0	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads		---	---	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load		---	---	±0.5	%	
Load Regulation	Io=0% to 100%	Single Output	---	---	±0.5	%	
		Dual Output	---	---	±1.0	%	
Minimum Load	No minimum Load Requirement						
Ripple & Noise	0-20 MHz Bandwidth	5V & 5.1Vo	Measured with a MLCC : 4.7µF	---	50	---	mV <sub>P-P</sub>
		12V,15V, ±12V, ±15Vo		---	100	---	mV <sub>P-P</sub>
		24Vo		---	150	---	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change <sub>(2)</sub>		---	---	300	µsec	
Transient Response Deviation			---	±3	±5	%	
Temperature Coefficient			---	---	±0.02	%/°C	
Over Load Protection	Hiccup		---	150	---	%	
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.7Hz typ.)						

Isolation, Safety Standards						
Parameter	Conditions		Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 300Vrms working voltage		4200	---	---	VAC
Leakage Current	240VAC, 60Hz		---	---	5	µA
I/O Isolation Resistance	500 VDC		10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V		---	---	80	pF
Safety Standards	ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1					
	IEC/EN 60601-1 3 <sup>rd</sup> Edition 2xMOPP					
Safety Approvals	ANSI/AAMI ES60601-1 2xMOPP recognition (UL certificate), IEC/EN 60601-1 3 <sup>rd</sup> Edition (CB-report)					

General Specifications						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Switching Frequency			---	285	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign		1,428,181	---	---	Hours

EMC Specifications				
Parameter	Standards & Level			Performance
	EMI	Conduction	EN 55011	Without external components
Radiation				
EMS	EN 60601-1-2 4 <sup>th</sup>			
	ESD	EN 61000-4-2 Air ± 15kV, Contact ± 8kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient <sub>(5)</sub>	EN 61000-4-4 ±2kV		A
	Surge <sub>(5)</sub>	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFFM	EN 61000-4-8 100A/m		A


Environmental Specifications				
Parameter	Conditions / Model	Min.	Max.	Unit
Operating Ambient Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MKW15-24S24M, MKW15-24D12M, MKW15-48S15M	-40	73	°C
	MKW15-12S12M, MKW15-12D15M, MKW15-24S12M MKW15-24S15M, MKW15-24D15M, MKW15-48S24M MKW15-48D12		70	
	MKW15-12S15M, MKW15-12S24M, MKW15-12D12M MKW15-24S05M, MKW15-24S051M, MKW15-48S05M MKW15-48S051M, MKW15-48S12M, MKW15-48D15M		67	
	MKW15-12S05M, MKW15-12S051M		62	
Thermal Impedance		13	---	°C/W
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Altitude		---	4000	M
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

**Notes**


- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 To meet EN 61000-4-4 & EN 61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- 6 Specifications are subject to change without notice.

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-12S05M

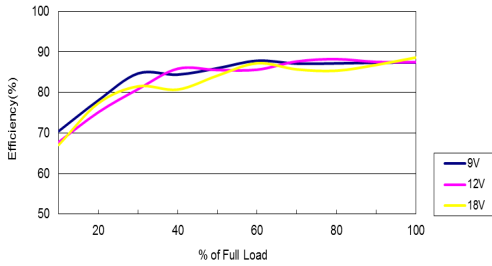


Efficiency Versus Output Current

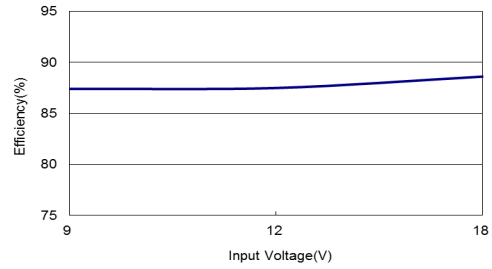


Efficiency Versus Input Voltage  
Full Load

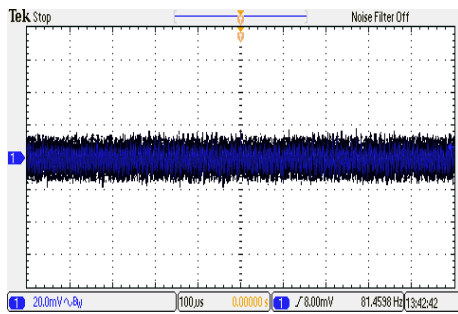


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

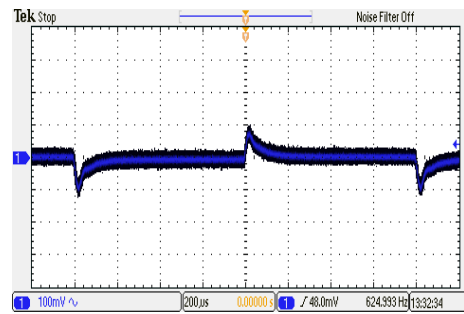

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

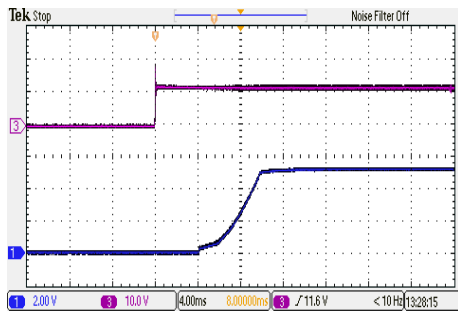


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

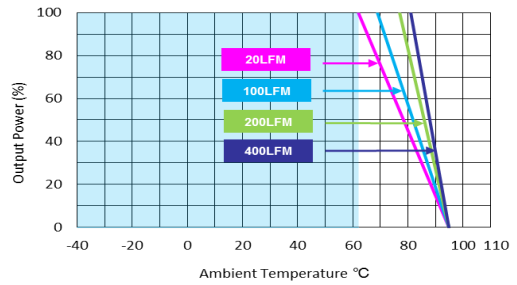


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-12S051M

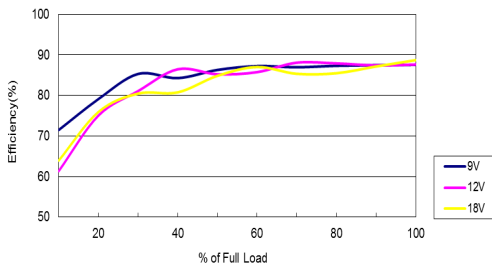


Efficiency Versus Output Current

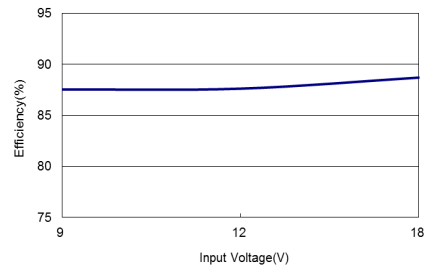


Efficiency Versus Input Voltage  
Full Load

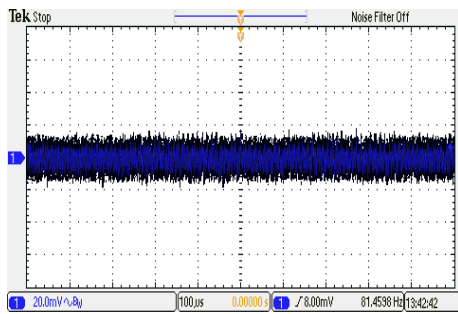


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

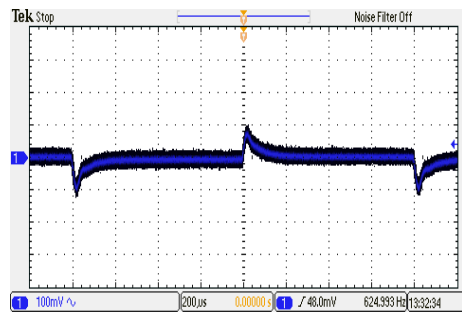

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

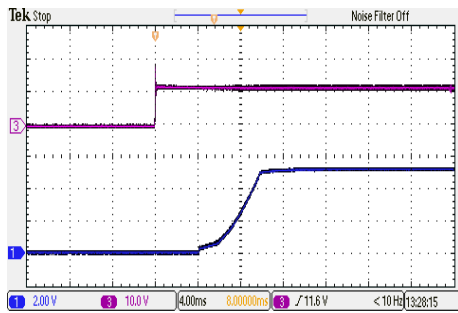


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

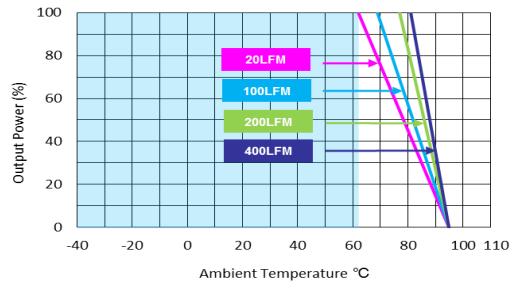


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-12S12M

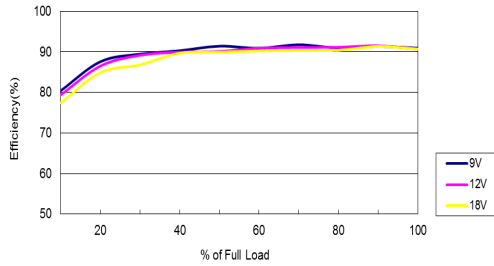


Efficiency Versus Output Current

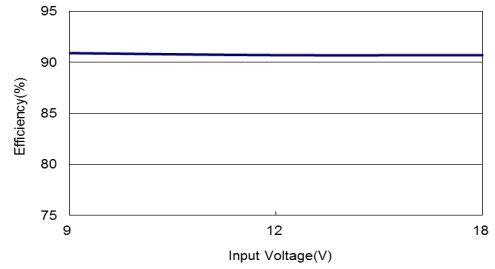


Efficiency Versus Input Voltage Full Load

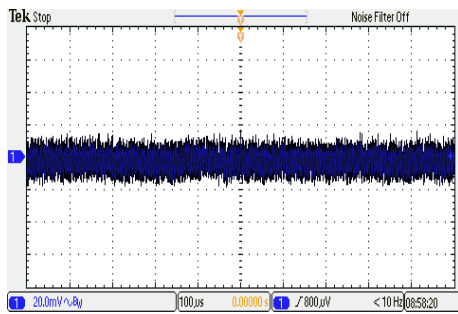


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

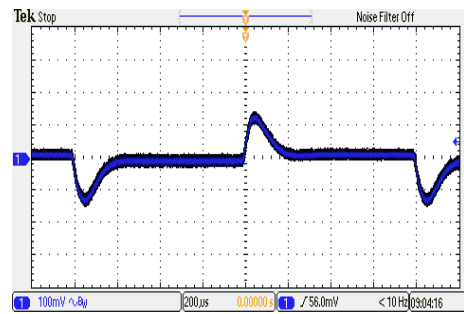

Transient Response to Dynamic Load Change from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

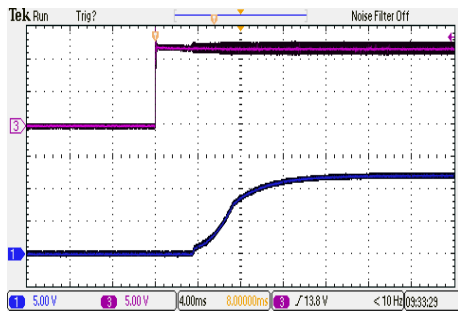


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

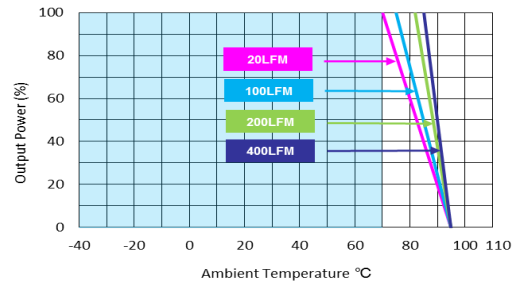


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-12S15M

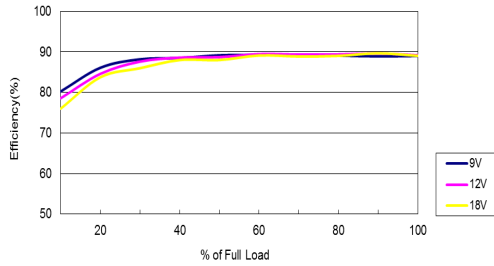


Efficiency Versus Output Current

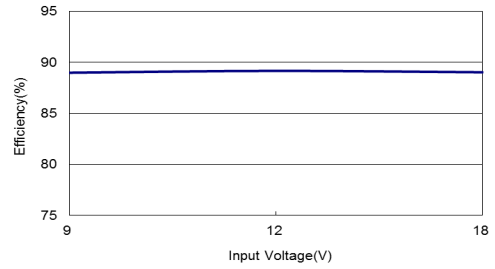


Efficiency Versus Input Voltage  
Full Load

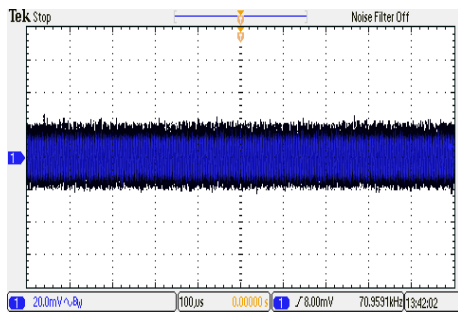


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

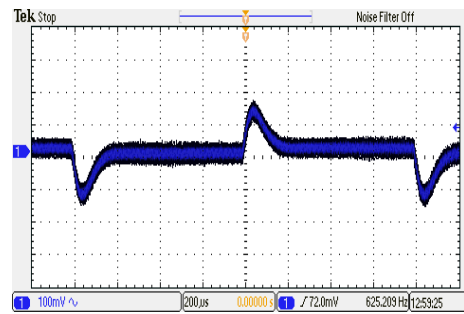

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

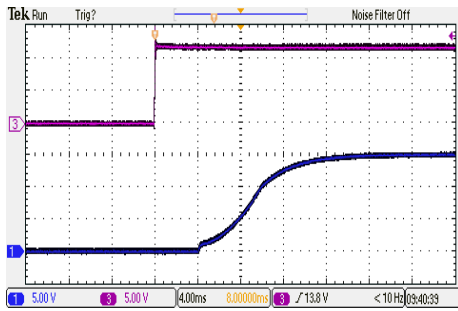

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

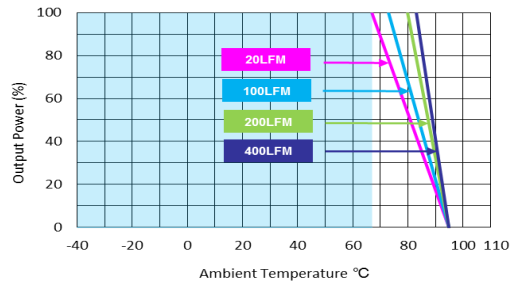


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$




**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-12S24M

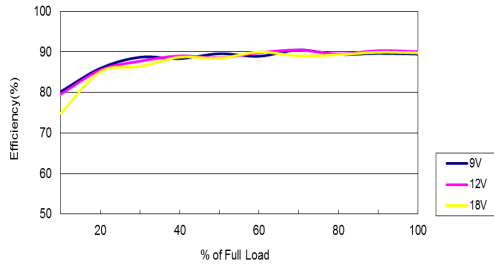


Efficiency Versus Output Current

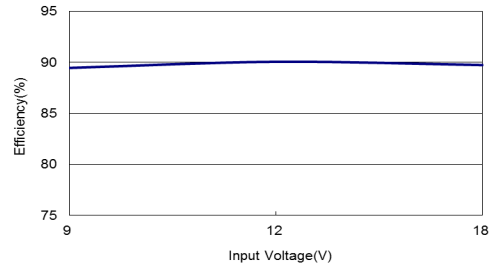


Efficiency Versus Input Voltage  
Full Load

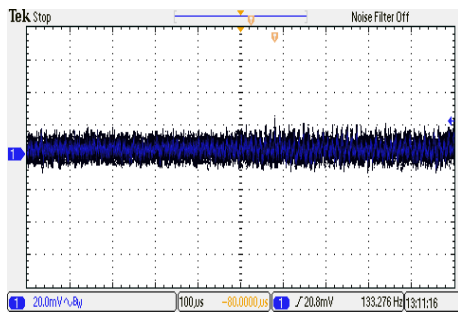


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

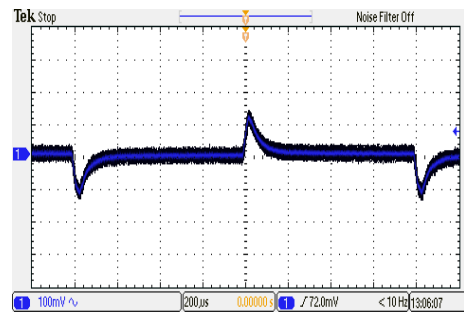

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

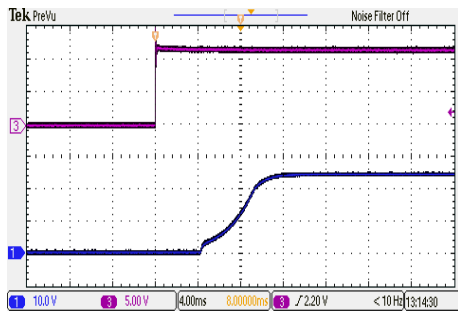


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

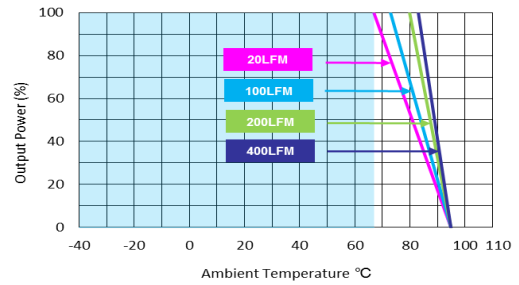


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MKW15-12D12M

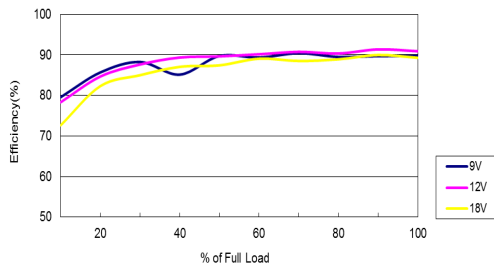


Efficiency Versus Output Current

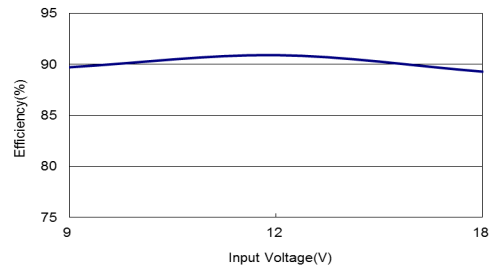


Efficiency Versus Input Voltage Full Load

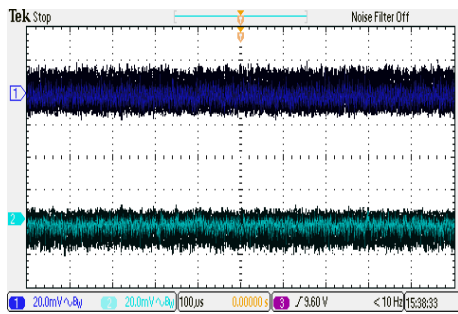


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

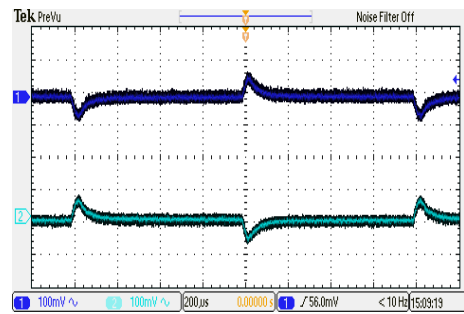

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

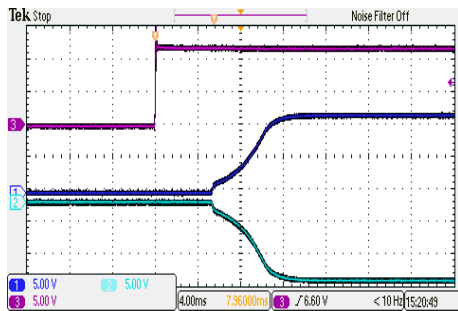







Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

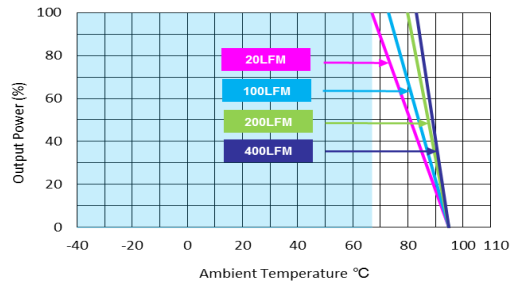

Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$


**Characteristic Curves**

All test conditions are at 25°C The figures are identical for MKW15-12D15M

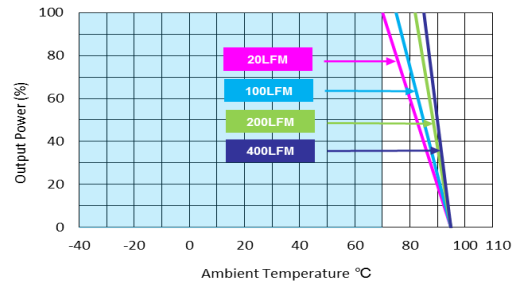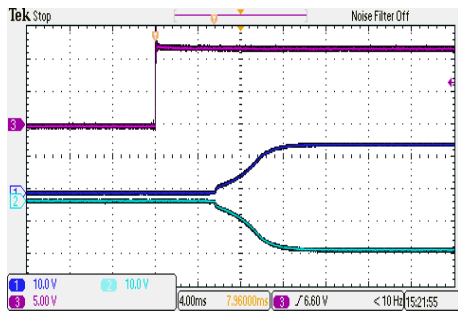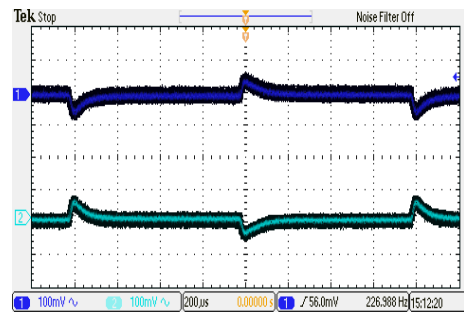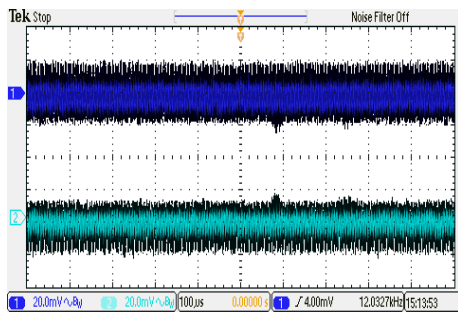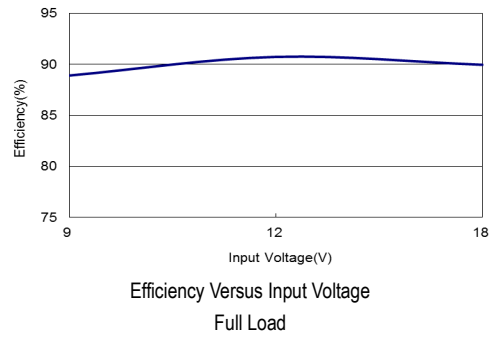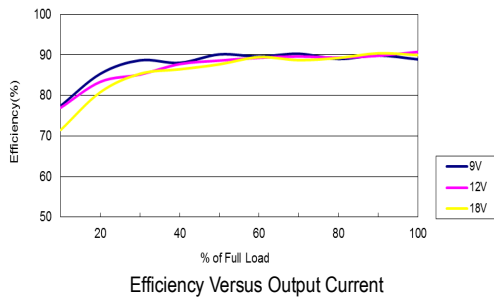


**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-24S05M

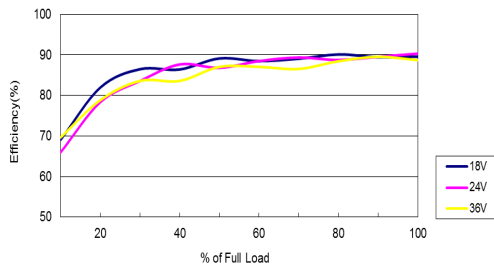


Efficiency Versus Output Current

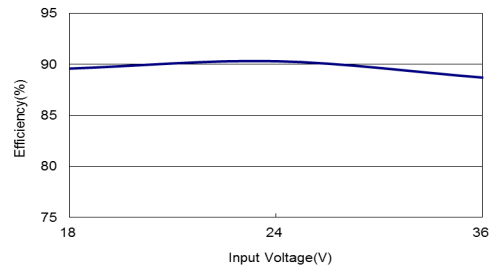


Efficiency Versus Input Voltage Full Load

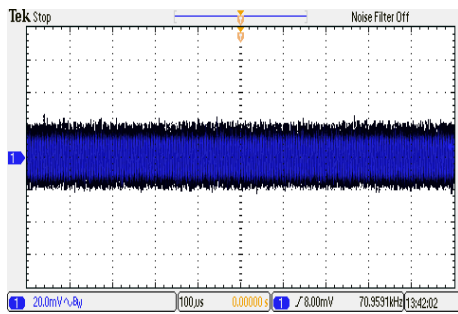


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

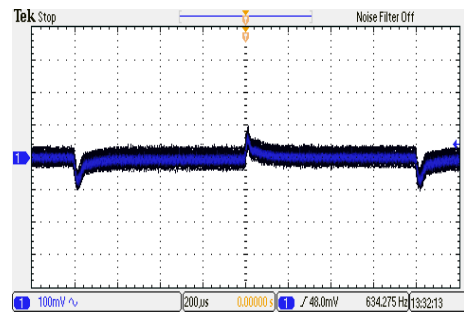

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

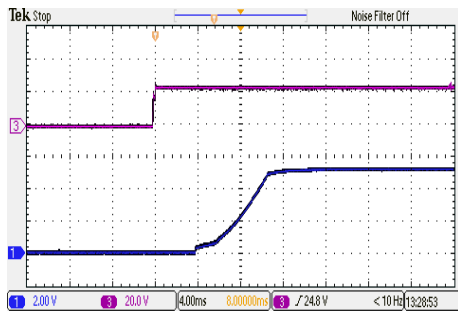


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

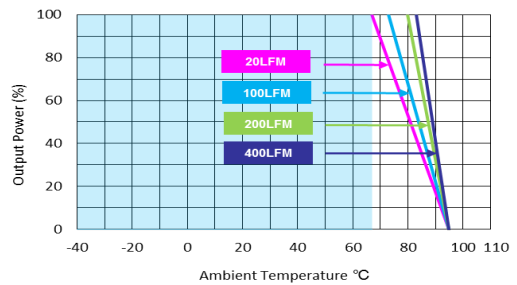


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MKW15-24S051M

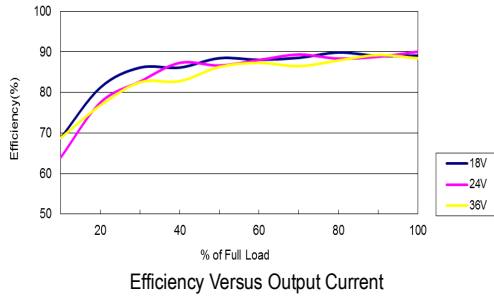


Efficiency Versus Output Current

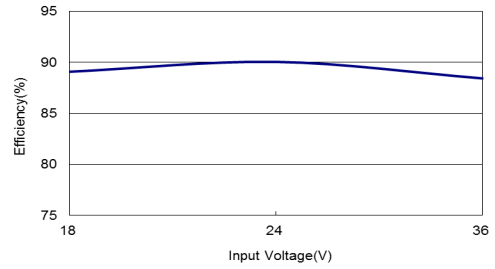


Efficiency Versus Input Voltage  
Full Load

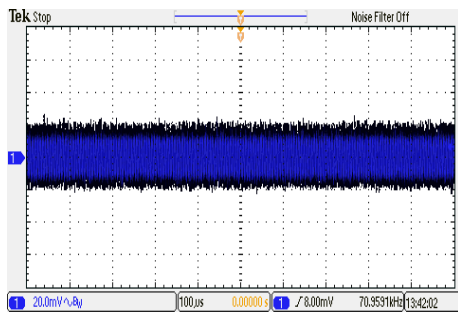


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

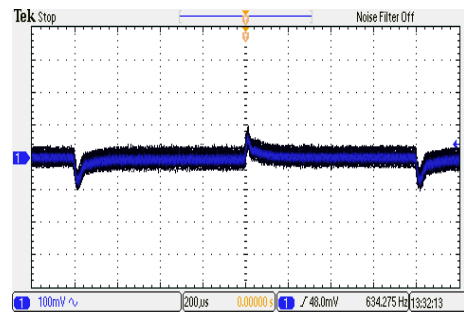

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

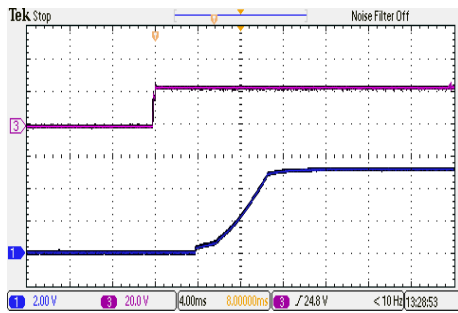


Typical Input Start-up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

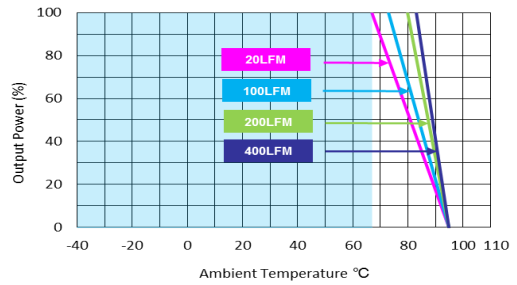


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-24S12M

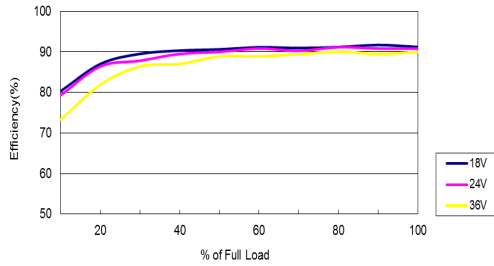


Efficiency Versus Output Current

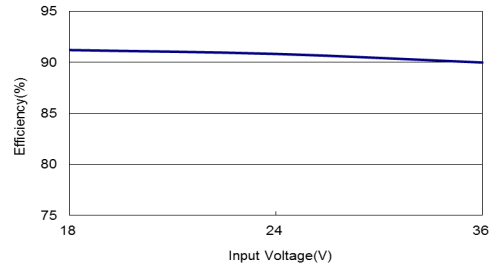


Efficiency Versus Input Voltage  
Full Load

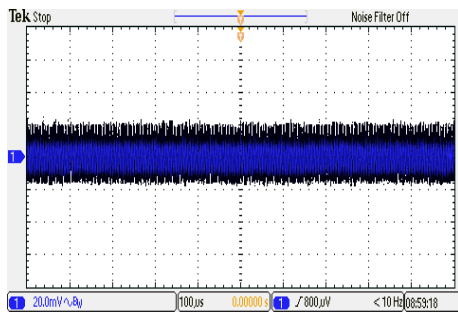


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

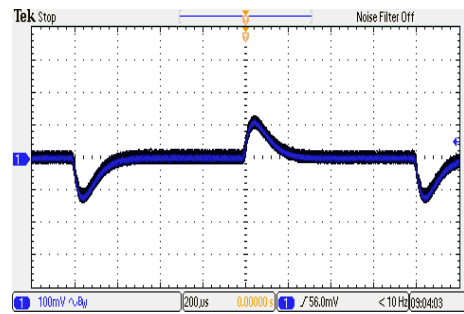

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

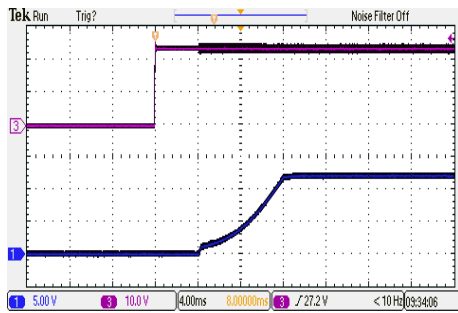


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

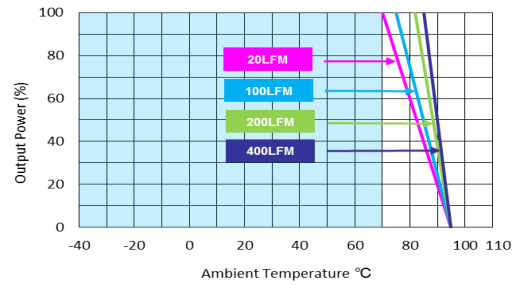


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-24S15M

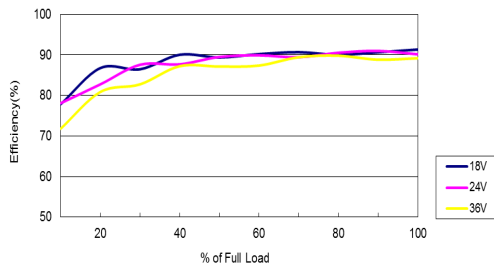


Efficiency Versus Output Current

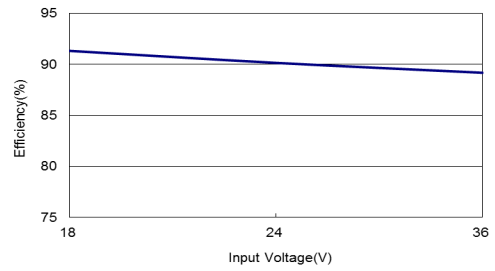


Efficiency Versus Input Voltage Full Load

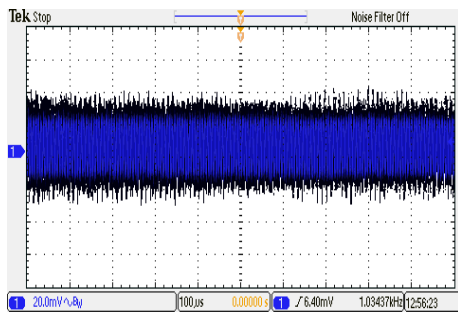


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

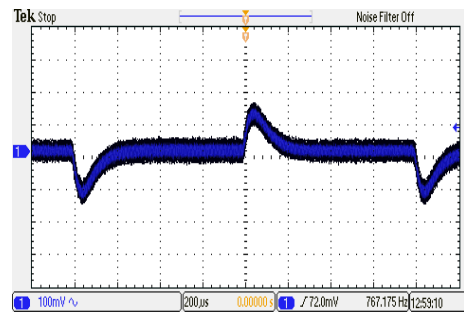

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

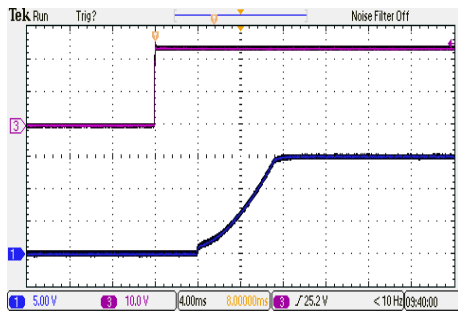


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

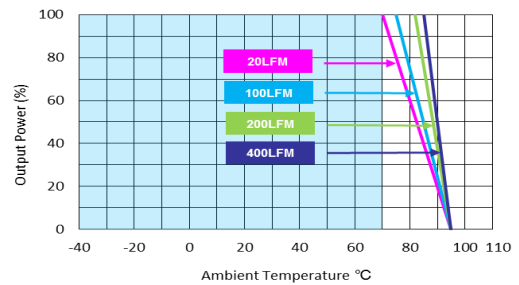


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MKW15-24S24M

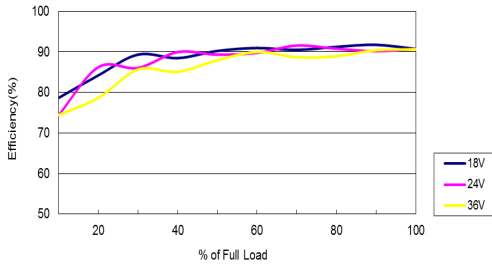


Efficiency Versus Output Current

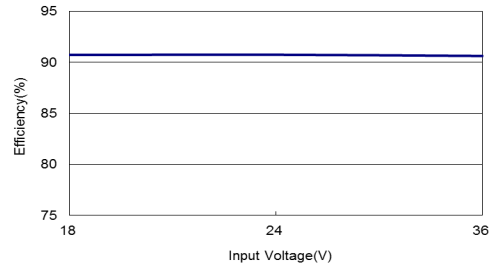


Efficiency Versus Input Voltage Full Load

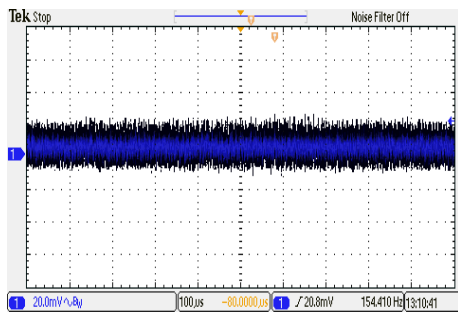


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

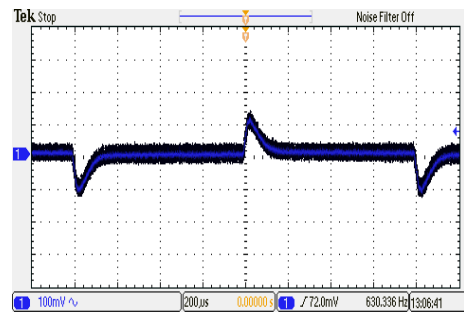

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

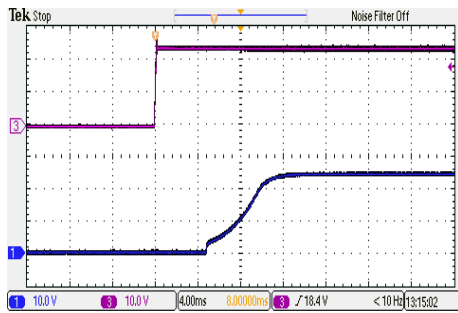

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

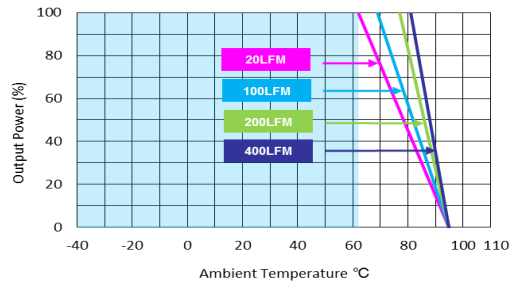


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$




**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-24D12M

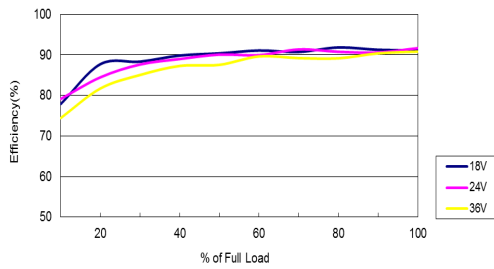


Efficiency Versus Output Current

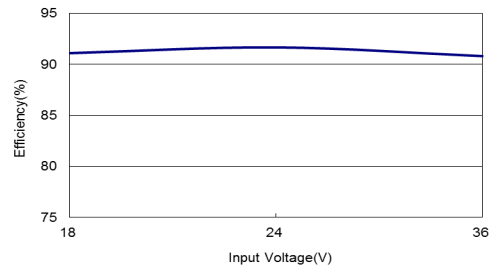


Efficiency Versus Input Voltage Full Load

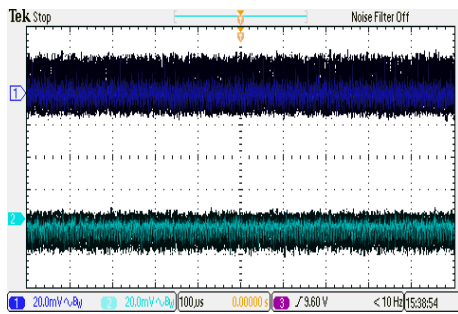


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

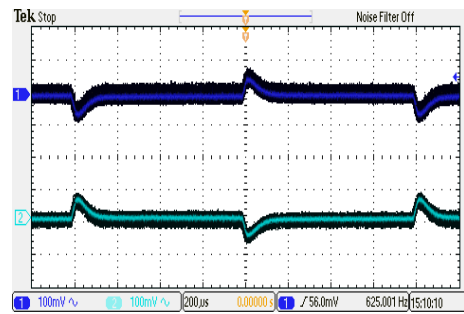

Transient Response to Dynamic Load Change from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

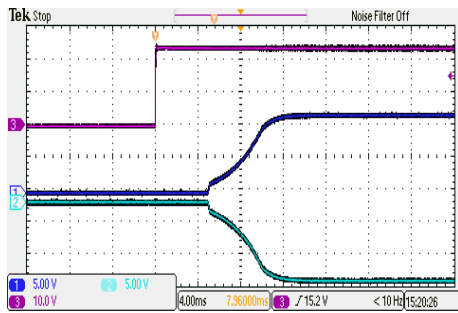


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

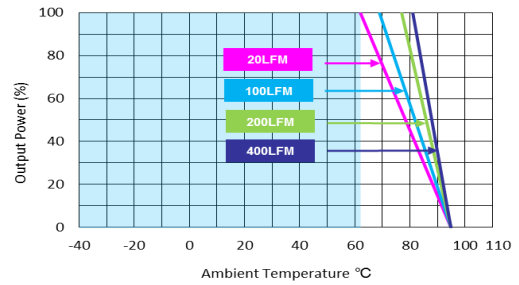


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-24D15M

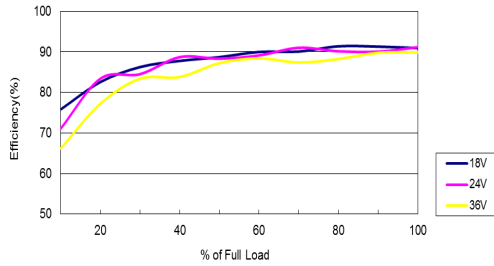


Efficiency Versus Output Current

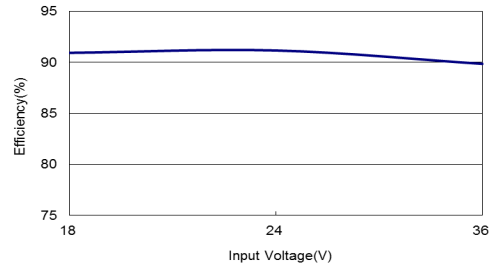


Efficiency Versus Input Voltage Full Load

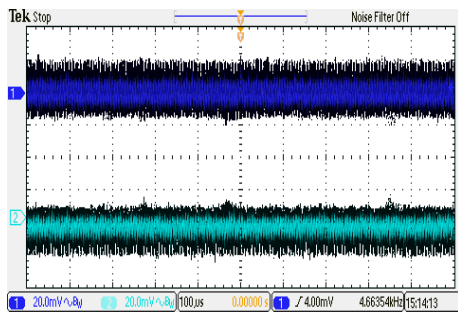


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

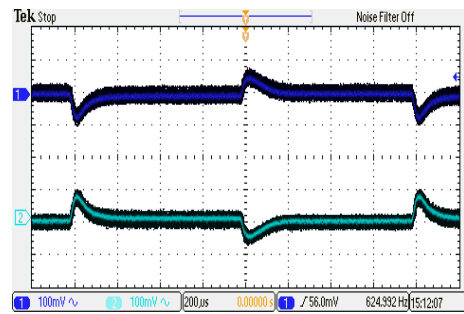

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

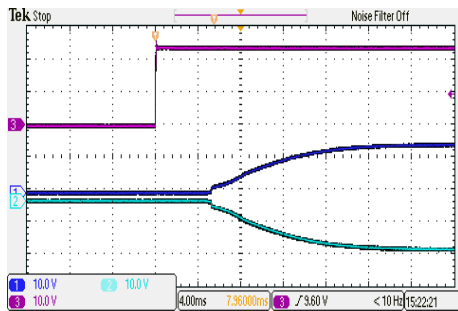


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

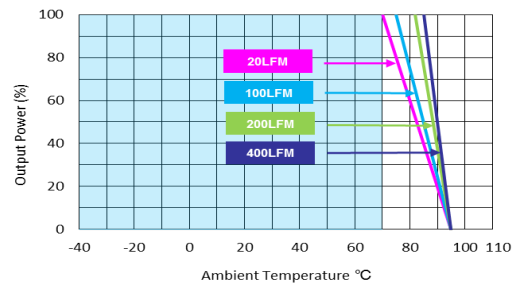


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-48S05M

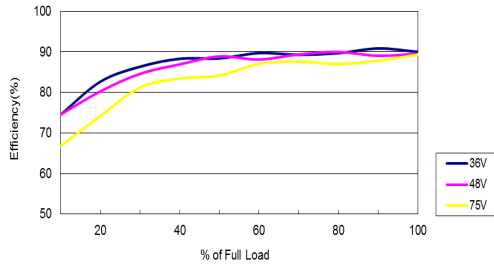


Efficiency Versus Output Current

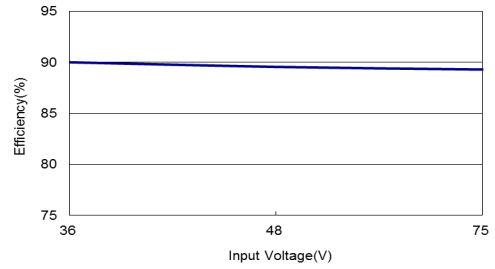


Efficiency Versus Input Voltage  
Full Load

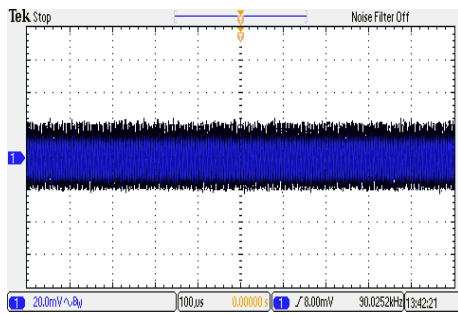


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

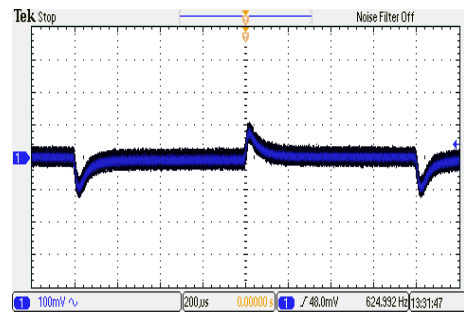

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

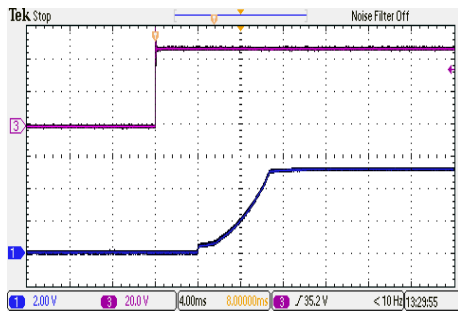


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

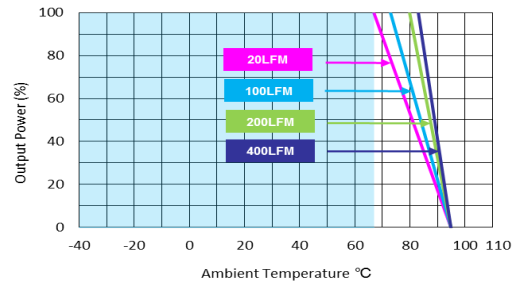


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-48S051M

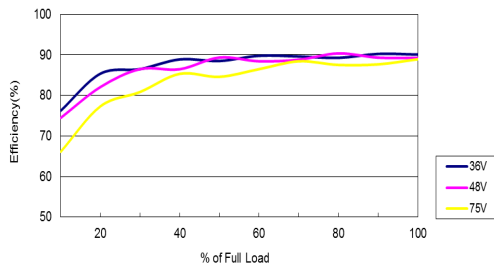


Efficiency Versus Output Current

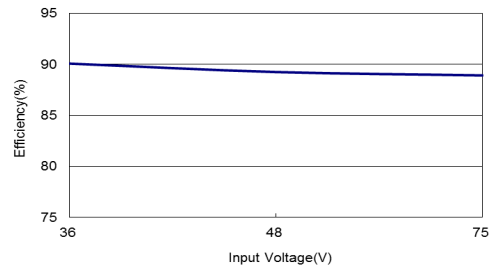


Efficiency Versus Input Voltage Full Load

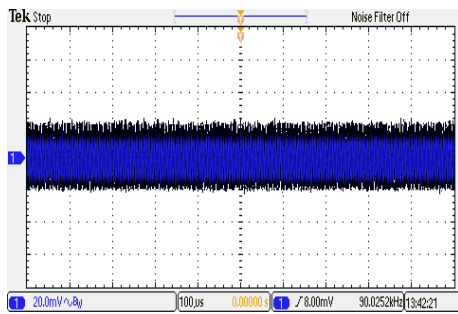


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

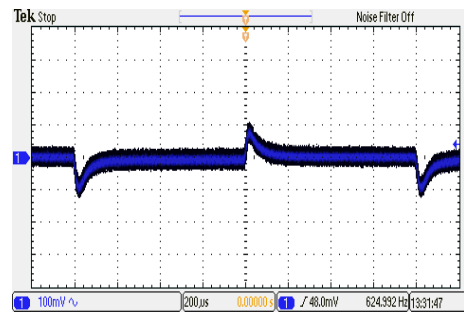

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

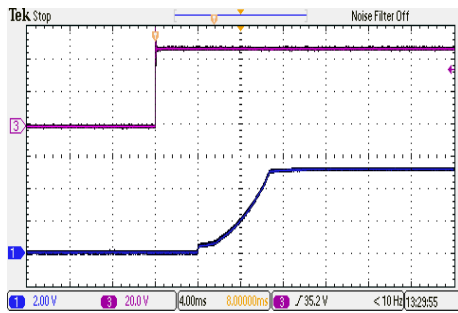


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

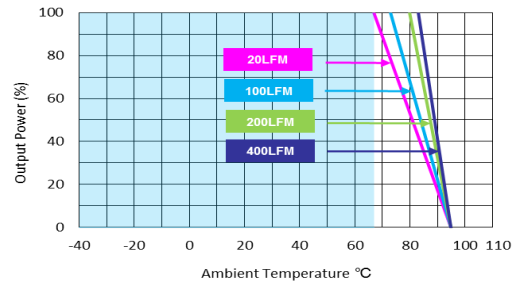


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-48S12M

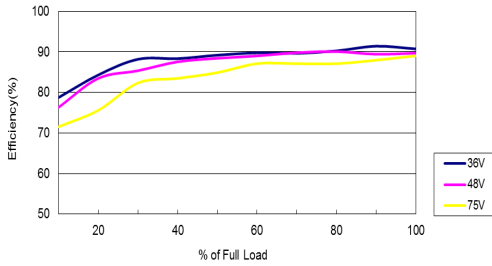


Efficiency Versus Output Current

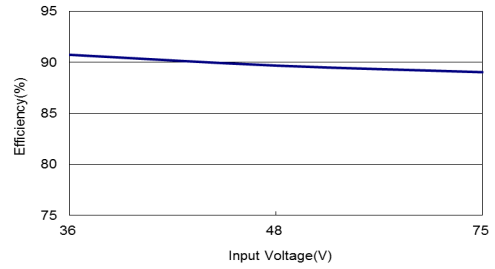


Efficiency Versus Input Voltage  
Full Load

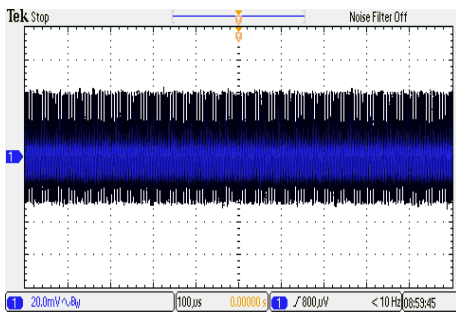


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

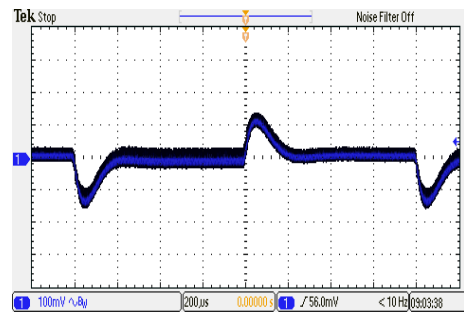

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

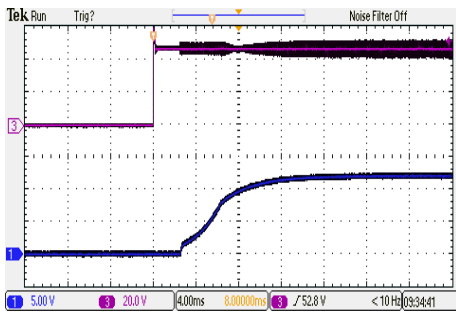


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

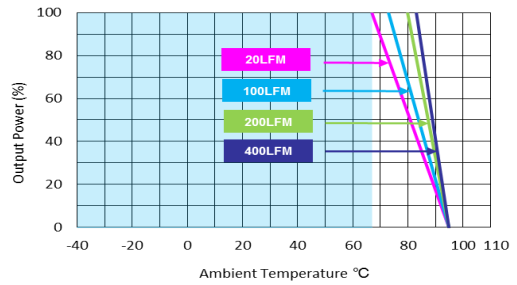


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MKW15-48S15M

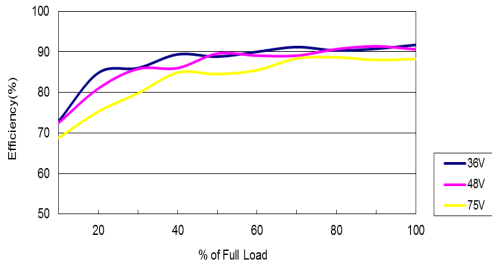


Efficiency Versus Output Current

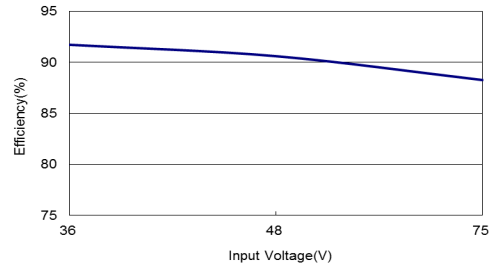


Efficiency Versus Input Voltage Full Load

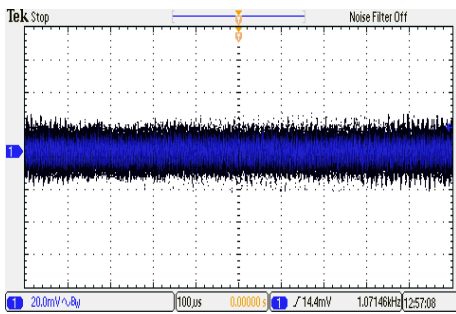


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

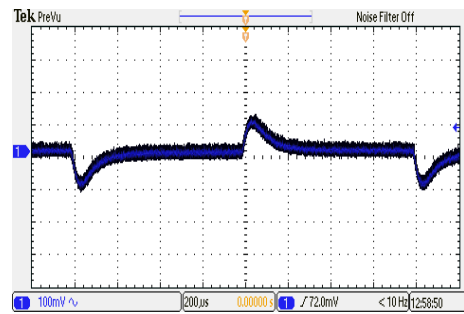

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

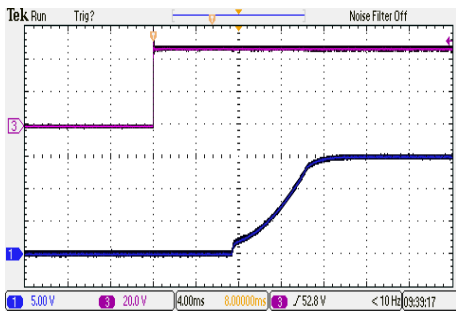


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

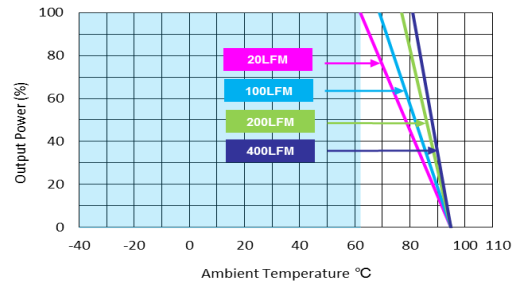


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-48S24M

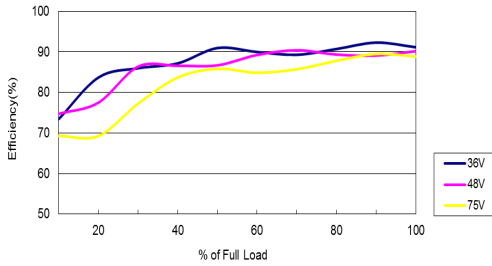


Efficiency Versus Output Current

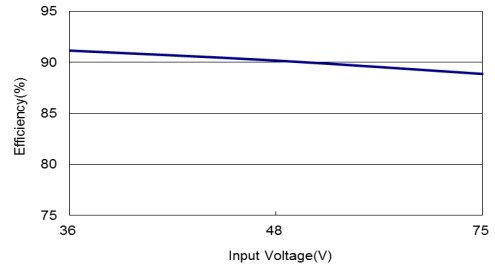


Efficiency Versus Input Voltage Full Load

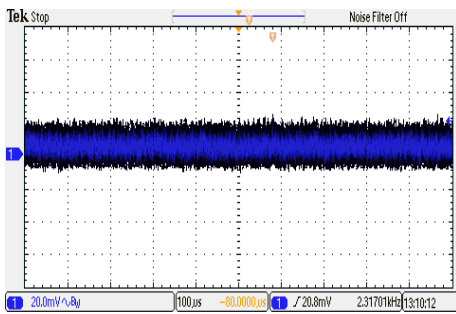


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

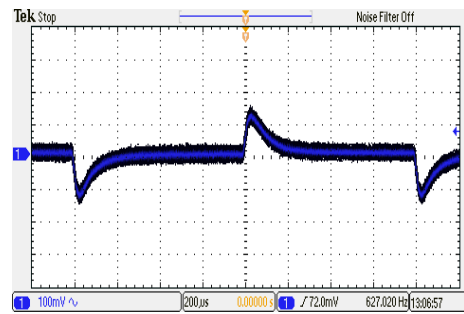

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

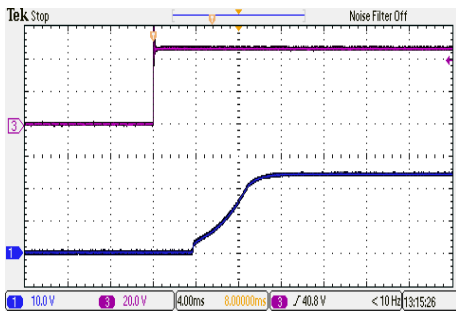


Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

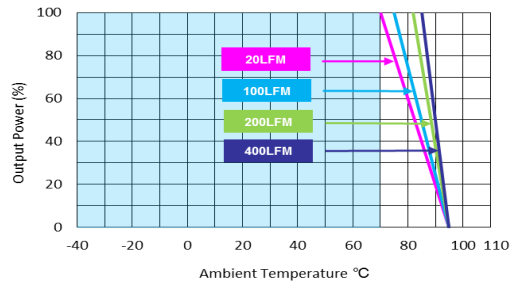


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-48D12M

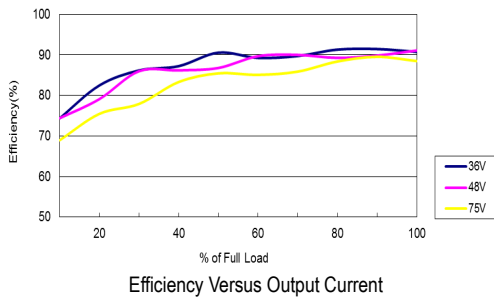


Efficiency Versus Output Current

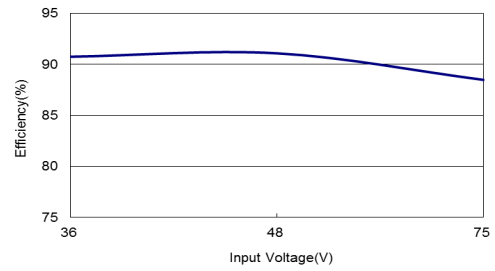


Efficiency Versus Input Voltage Full Load

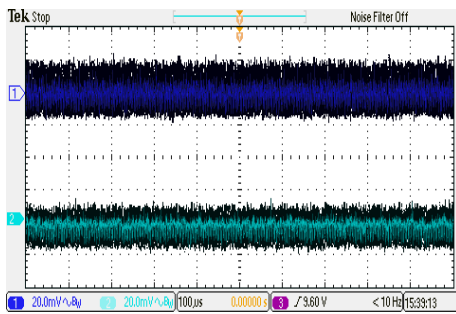


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

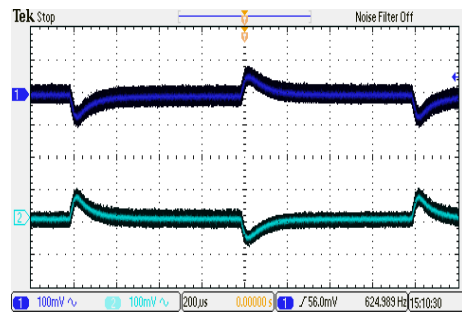

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

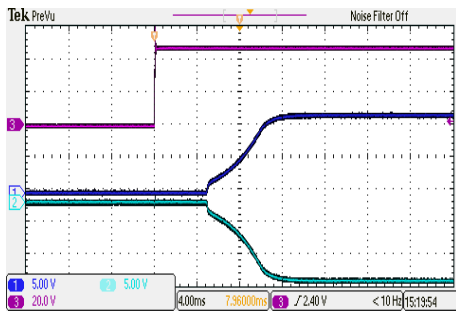

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

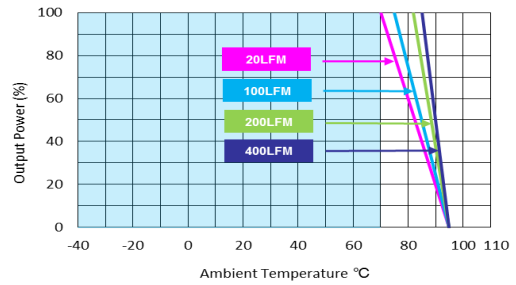


Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$




Characteristic Curves


All test conditions are at 25°C The figures are identical for MKW15-48D15M

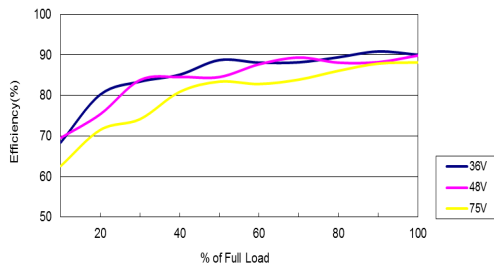


Efficiency Versus Output Current

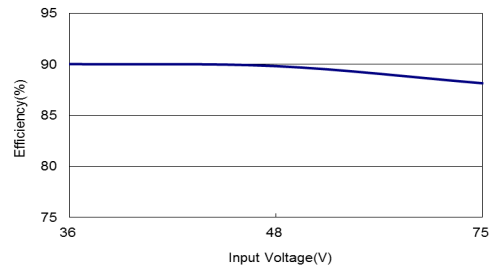


Efficiency Versus Input Voltage Full Load

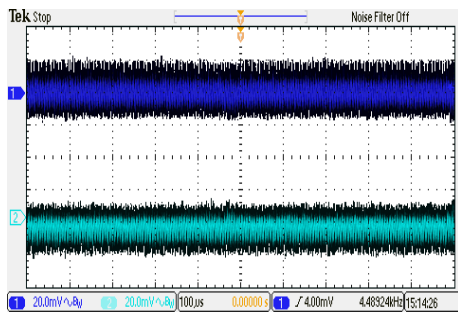


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$  ; Full Load

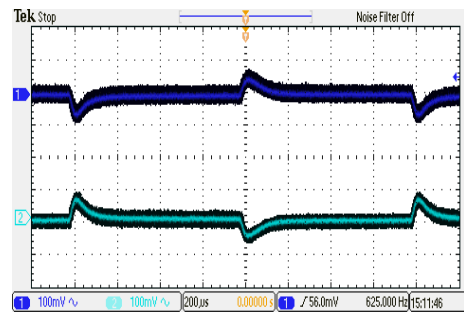

Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load ;  $V_{in}=V_{in\ nom}$

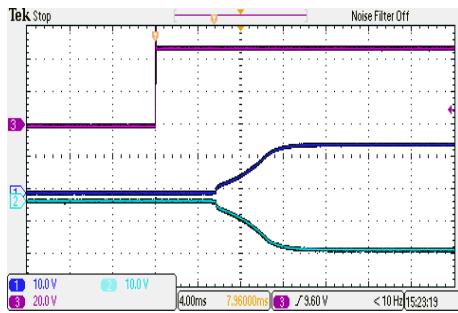

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$  ; Full Load

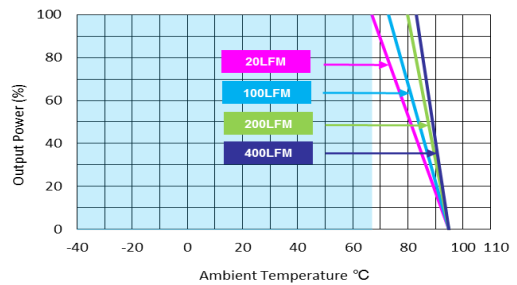

Derating Output Power Versus Ambient Temperature and Airflow  
 $V_{in}=V_{in\ nom}$

**Package Specifications**

**Mechanical Dimensions**


**Pin Connections**

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter  $\varnothing 1.0 \pm 0.05$  (0.04±0.002)

**Physical Characteristics**


Case Size	: 50.8x25.4x12.0mm (2.0x1.0x0.47 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Tin Plate Over Nickel Subplate
Weight	: 30g

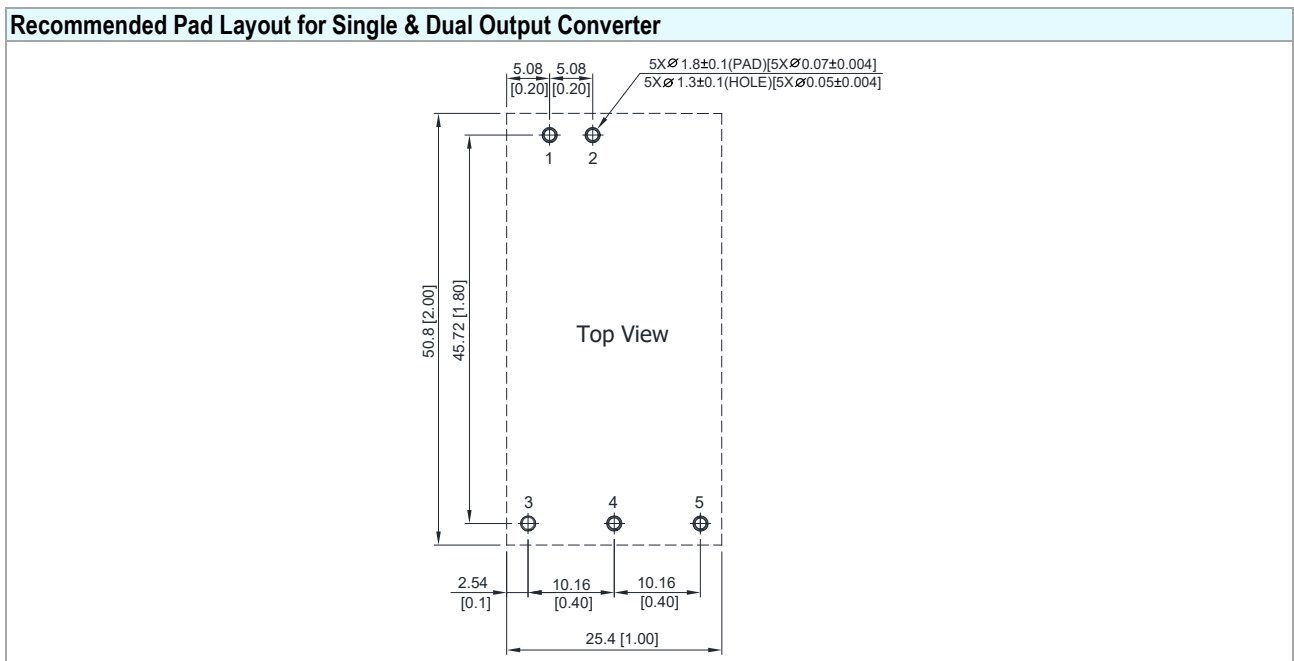

**Test Setup**


**Input Reflected-Ripple Current Test Setup**

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 kHz) to simulate source impedance. Capacitor  $C_{in}$ , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

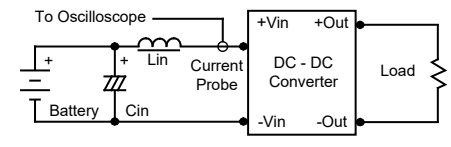

**Peak-to-Peak Output Noise Measurement Test**

Use a  $C_{out}$  4.7 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

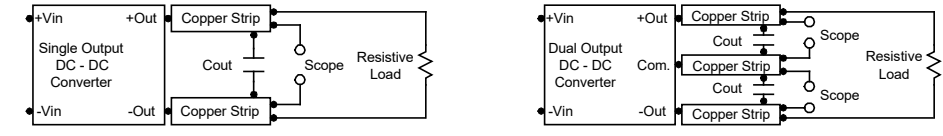

**Technical Notes**

**Overload Protection**


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

**Overvoltage Protection**

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


**Input Source Impedance**

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 10 $\mu$ F for the 12V input devices and a 4.7 $\mu$ F for the 24V input devices and a 2.2 $\mu$ F for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

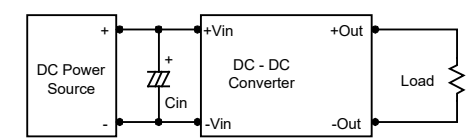

**Output Ripple Reduction**

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 $\mu$ F capacitors at the output.

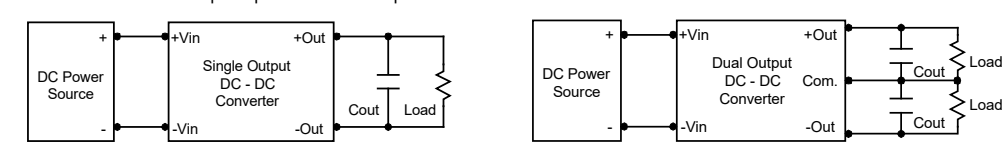


**Maximum Capacitive Load**


The MKW15M series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

**Thermal Considerations**

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 95 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

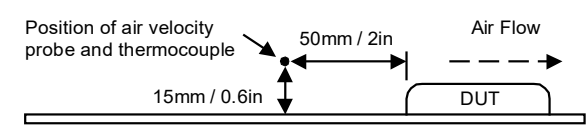


Packaging Information

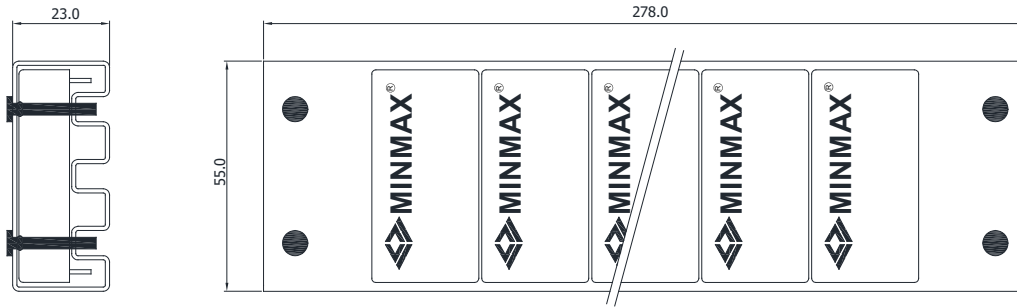

Wave Soldering Considerations

Lead free wave solder profile

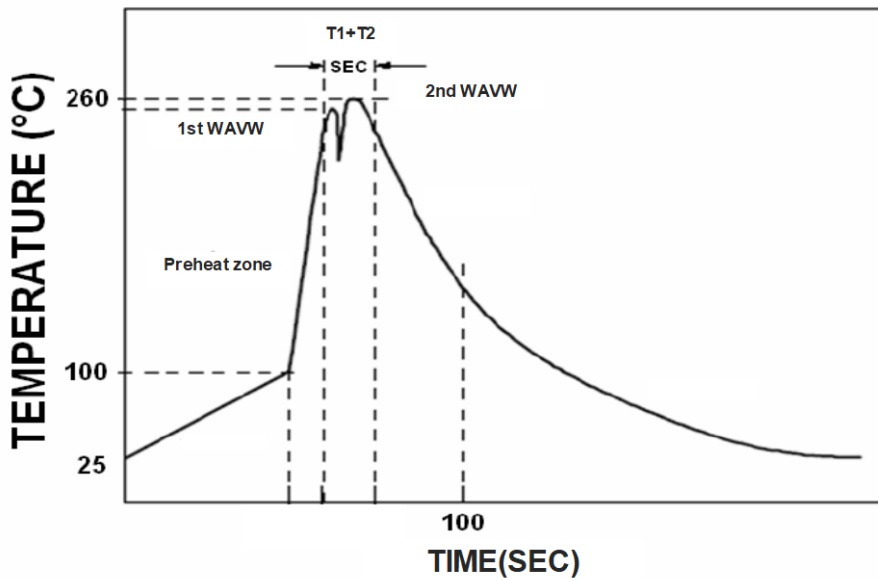


Profile Feature	Reference Parameter
Heating rate during preheat	Rise temp. speed : 3°C/sec max.
Final preheat temperature	Preheat temp. : 100~130°C
Peak temperature	Peak temp. : 250~260°C
Time within peak temperature	Peak time(T1+T2) : 4~6 sec

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C

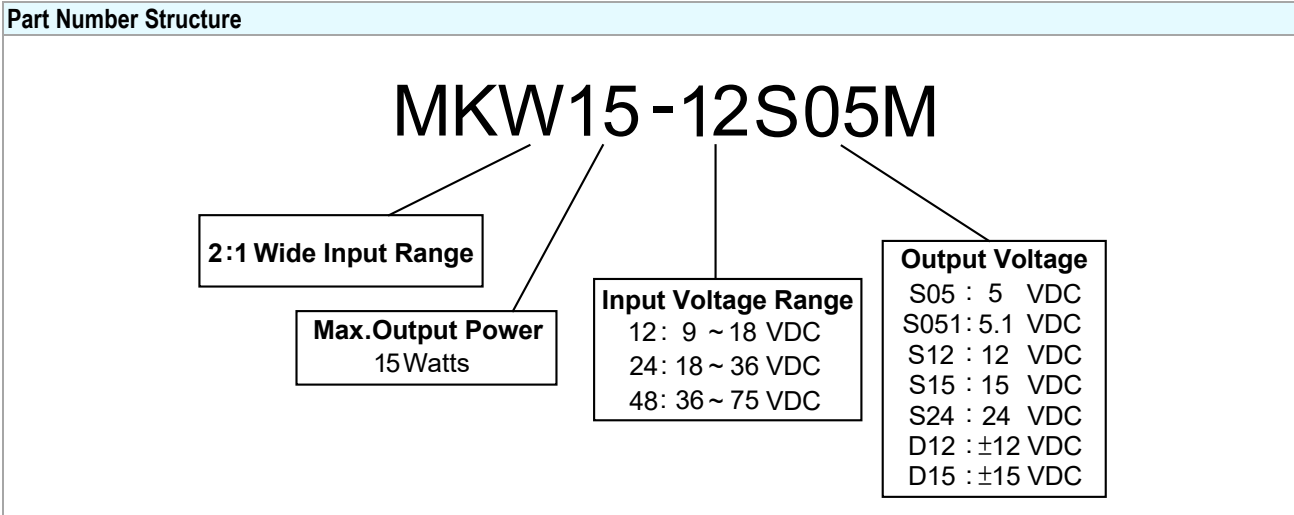

**MTBF and Reliability**

The MTBF of MKW15M series of DC-DC converters has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.

Model	MTBF	Unit
MKW15-12S05M	1,428,181	Hours
MKW15-12S051M	1,428,181	
MKW15-12S12M	1,927,407	
MKW15-12S15M	2,026,516	
MKW15-12S24M	1,780,163	
MKW15-12D12M	1,780,163	
MKW15-12D15M	2,108,738	
MKW15-24S05M	1,646,820	
MKW15-24S051M	1,646,820	
MKW15-24S12M	1,975,949	
MKW15-24S15M	2,068,481	
MKW15-24S24M	2,019,674	
MKW15-24D12M	2,019,674	
MKW15-24D15M	2,134,001	
MKW15-48S05M	1,749,638	
MKW15-48S051M	1,749,638	
MKW15-48S12M	1,866,230	
MKW15-48S15M	1,953,706	
MKW15-48S24M	1,809,937	
MKW15-48D12M	1,809,937	
MKW15-48D15M	2,031,988	