



MINMAX[®]

MSCEU01-HI Series

Electric Characteristic Note

MSCEU01-HI Series EC Note

DC-DC CONVERTER 1W, Ultra-High Isolation, SMD Package

Features

- ▶ Industrial Standard SMD Package
- ▶ Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rate for 480Vrms Working Voltage
- ▶ Operating Ambient Temp. Range -40°C to +95°C
- ▶ Short Circuit Protection
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval



Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

Product Overview

The MINMAX MSCEU01-HI series is a new range of high performance 1W DC-DC converter within encapsulated SMD-14 package which specifically design for high isolation applications where reinforced insulation and high working voltage are required. There are 15 models available for input voltage of 5, 12, 24VDC. The I/O isolation is specified for 8000VDC with reinforced insulation, which rated for 480Vrms working voltage. Further features include short circuit protection and operating ambient temp. range by -40°C to 95°C.

These converters offer a cost-effective solution for wind turbine, solar panel, transportation systems, industrial control equipment where a high I/O isolation and insulation with working voltage is required.

Table of contents

Model Selection Guide	P2	Package Specifications	P20
Input Specifications.....	P2	Test Setup.....	P21
Output Specifications.....	P2	Technical Notes	P21
Output Voltage Tolerance	P3	Packaging Information for Tube	P22
Isolation, Safety Standards.....	P3	Packaging Information for Tape & Reel.....	P22
General Specifications.....	P3	Soldering and Reflow Considerations	P23
EMC Specifications.....	P3	Part Number Structure	P24
Environmental Specifications	P4	MTBF and Reliability	P24
Characteristic Curves	P5		


Model Selection Guide							
Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
				@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	%
MSCEU01-05S05HI	5 (4.5 ~ 5.5)	5	200	263	50	220	76
MSCEU01-05S12HI		12	84	252			80
MSCEU01-05S15HI		15	68	246			83
MSCEU01-05D12HI		±12	±42	252		100#	80
MSCEU01-05D15HI		±15	±33	236			84
MSCEU01-12S05HI	12 (10.8 ~ 13.2)	5	200	110	35	220	76
MSCEU01-12S12HI		12	84	106			79
MSCEU01-12S15HI		15	68	106			80
MSCEU01-12D12HI		±12	±42	106		100#	79
MSCEU01-12D15HI		±15	±33	103			80
MSCEU01-24S05HI	24 (21.6 ~ 26.4)	5	200	55	20	220	76
MSCEU01-24S12HI		12	84	53			80
MSCEU01-24S15HI		15	68	53			80
MSCEU01-24D12HI		±12	±42	53		100#	80
MSCEU01-24D15HI		±15	±33	52			80

For each output


Input Specifications						
Parameter	Model	Min.	Typ.	Max.	Unit	
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC	
	12V Input Models	10.8	12	13.2		
	24V Input Models	21.6	24	26.4		
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9		
	12V Input Models	-0.7	---	18		
	24V Input Models	-0.7	---	30		
Input Filter	All Models	Internal Capacitor				

Output Specifications							
Parameter	Conditions	Min.	Typ.	Max.	Unit		
Output Voltage Setting Accuracy		---	±1.0	±3.0	%V _{nom} .		
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%		
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%		
Load Regulation	I _o =10% to 100%	See Model Selection Guide (Operation at lower load will not damage the converter, but it may not meet all specifications)					
Ripple & Noise	0-20 MHz Bandwidth	---	---	100	mV _{P-P}		
Temperature Coefficient		---	±0.01	±0.02	%/°C		
Short Circuit Protection	Continuous, Automatic Recovery						

Output Voltage Tolerance

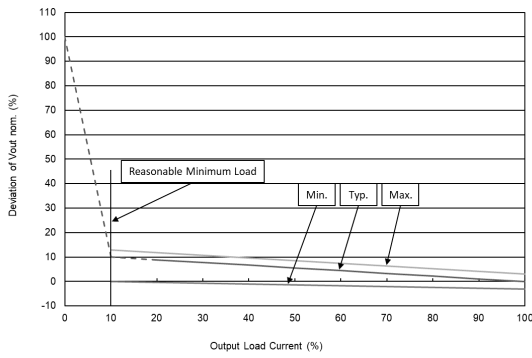

Output Voltage VS Output Load Current

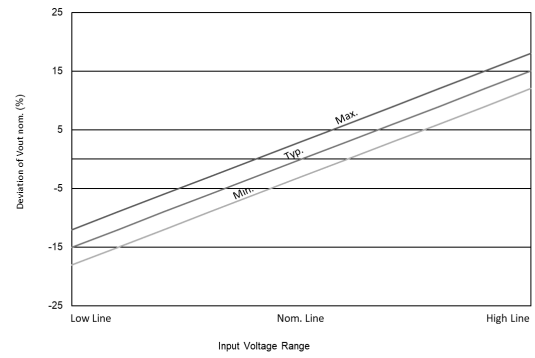

Output Voltage VS Input Voltage Range

Isolation, Safety Standards

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 480Vrms working voltage	3000	---	---	VAC
	Tested for 1 second	8000	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	---	pF
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report)				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	55	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	4,771,507	---	---	Hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 2			

EMC Specifications

Parameter	Standards & Level			Performance
EMI (5)	Conduction	EN 55032	With external components	Class A
	Radiation		Without external components	
EMS (5)	EN 55035			
	ESD	EN 61000-4-2 Air ± 15kV , Contact ± 8kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 100A/m (1 min.), 1000A/m (1 sec.)		A

Environmental Specifications


Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+95	°C
Case Temperature	---	+105	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead-free Reflow Solder Process	IPC/JEDEC J-STD-020D.1		

Notes


- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 6 Specifications are subject to change without notice.
- 7 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-05S05HI

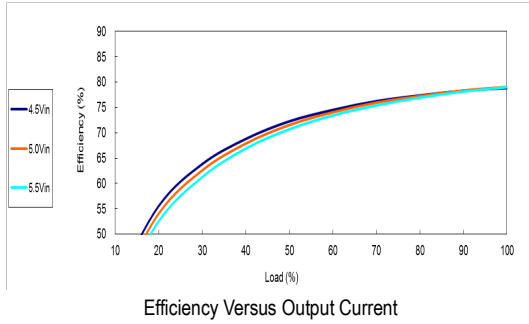


Efficiency Versus Output Current

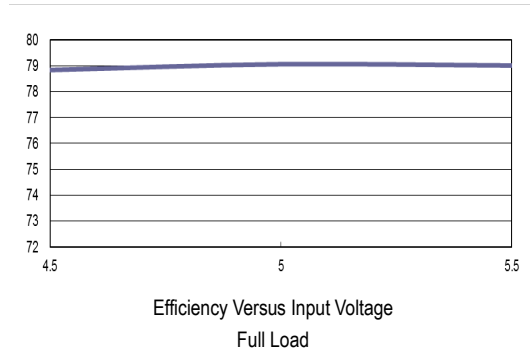

Efficiency Versus Input Voltage Full Load

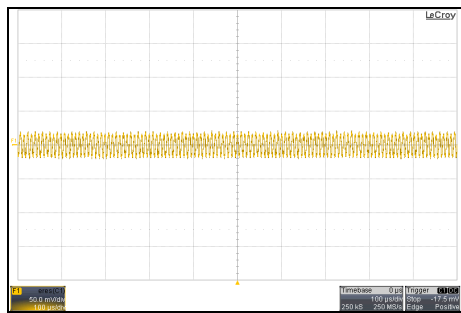





Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

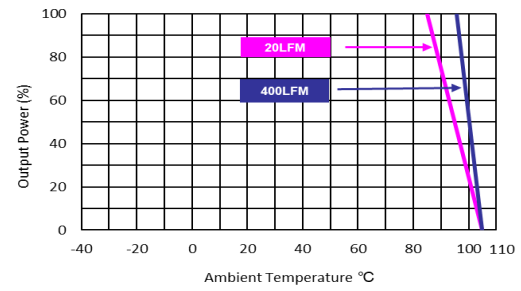

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$


Characteristic Curves

All test conditions are at 25°C The figures are identical for MSCEU01-05S12HI

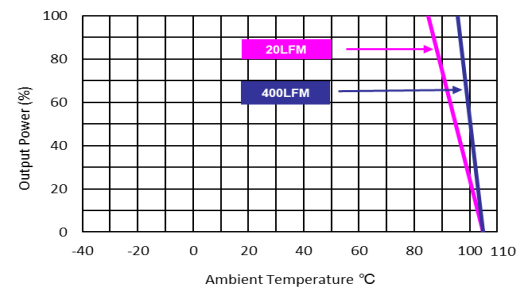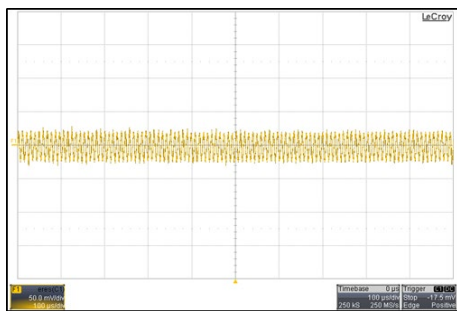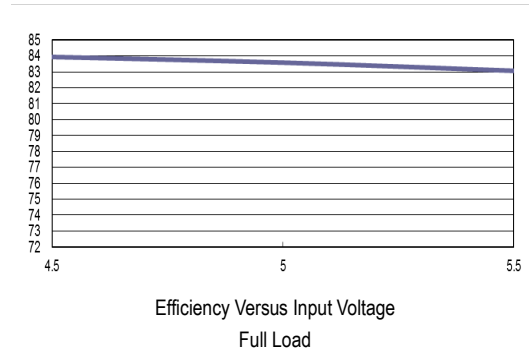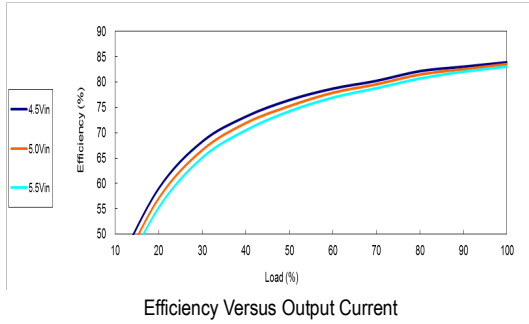


Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-05S15HI

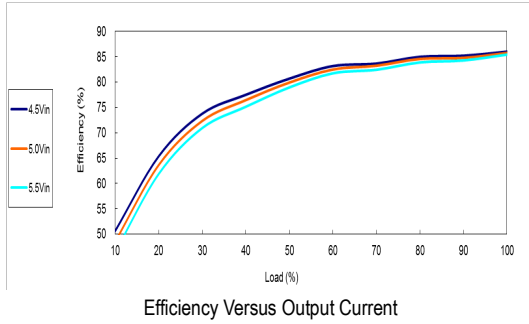


Efficiency Versus Output Current

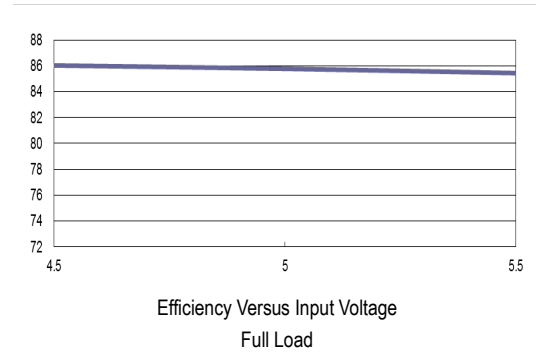

Efficiency Versus Input Voltage Full Load

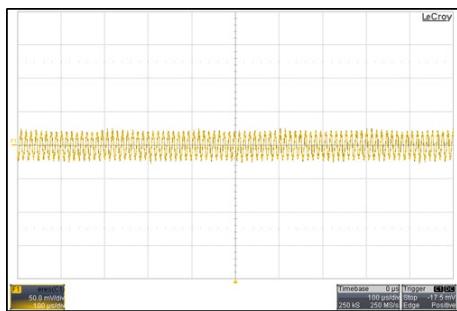


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

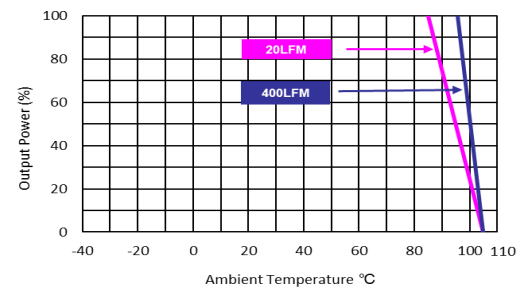


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-05D12HI

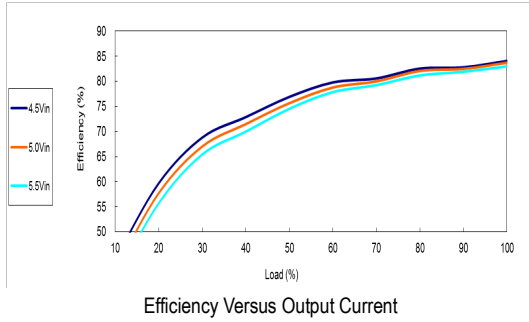


Efficiency Versus Output Current

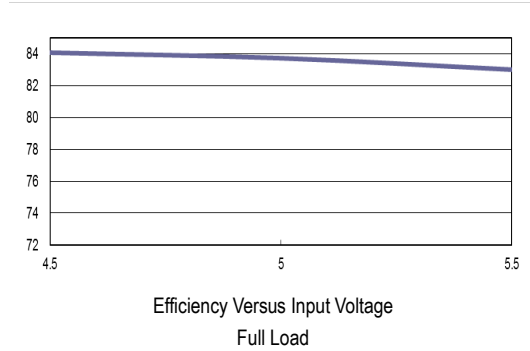

Efficiency Versus Input Voltage Full Load

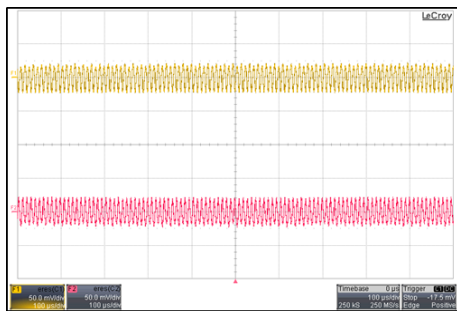


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

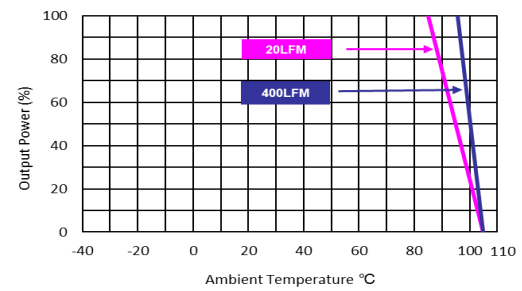


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-05D15HI

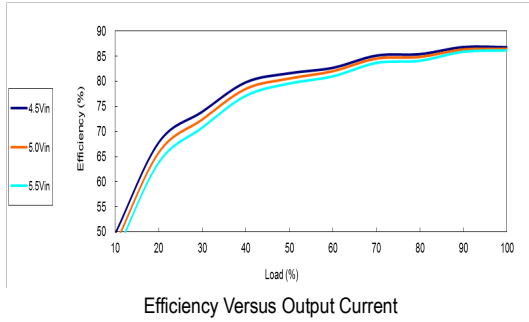


Efficiency Versus Output Current

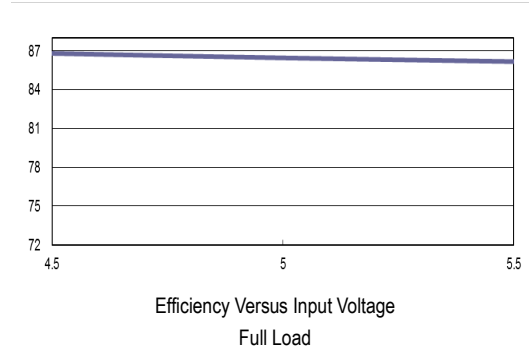

Efficiency Versus Input Voltage Full Load

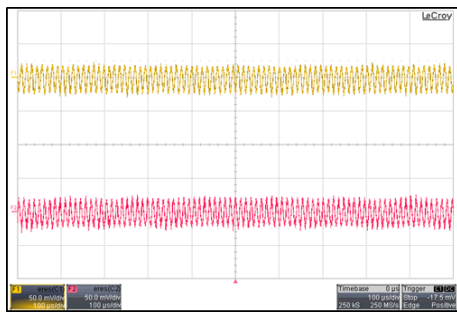


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

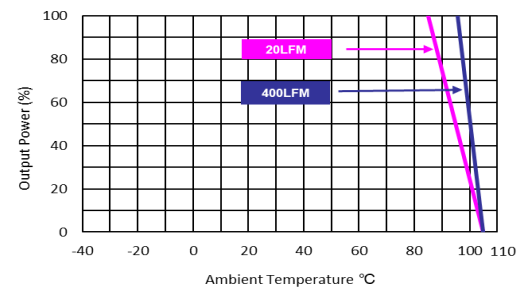


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-12S05HI

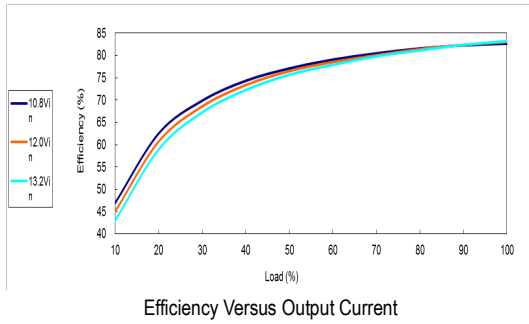


Efficiency Versus Output Current

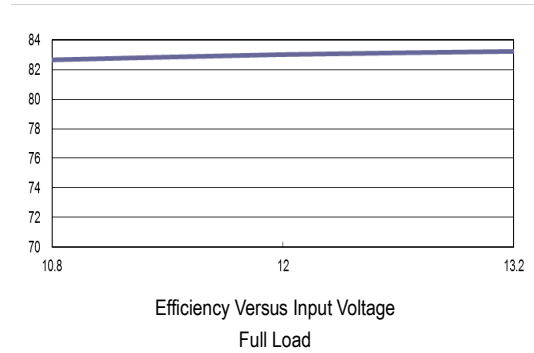

Efficiency Versus Input Voltage Full Load

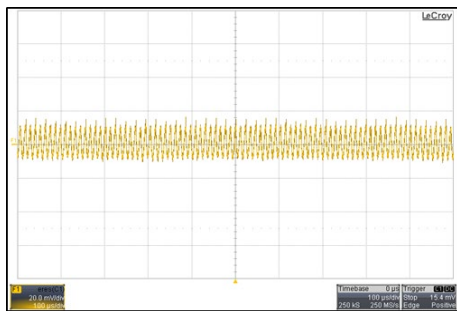


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

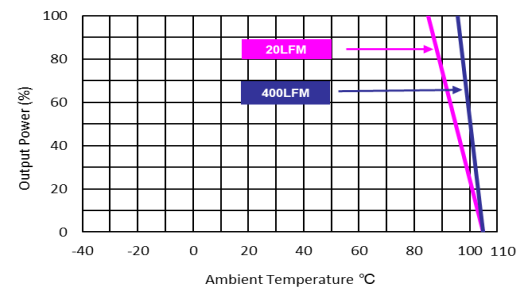


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-12S12HI

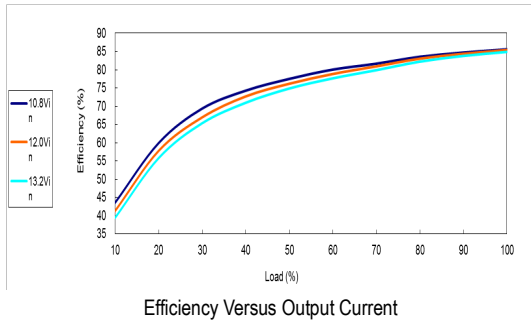


Efficiency Versus Output Current

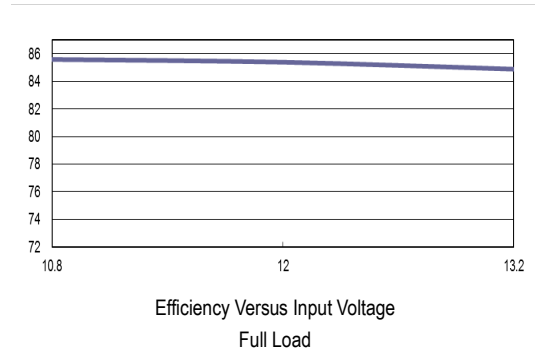

Efficiency Versus Input Voltage Full Load

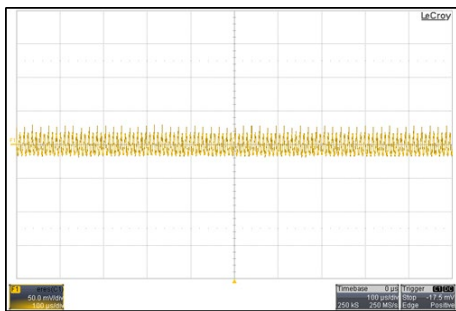


Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

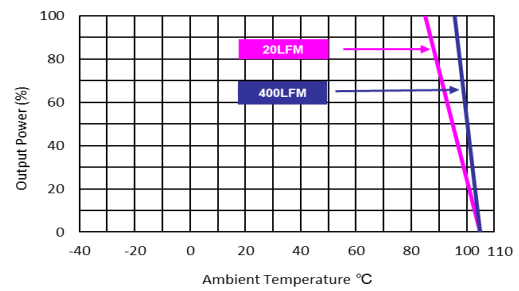


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-12S15HI

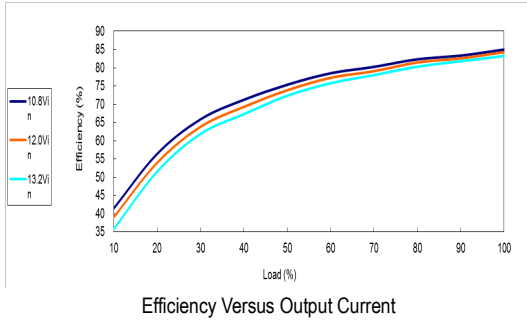


Efficiency Versus Output Current

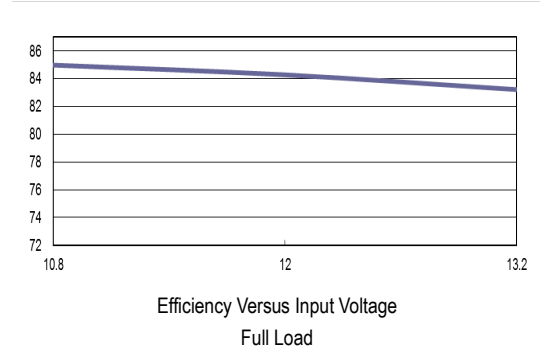

Efficiency Versus Input Voltage Full Load

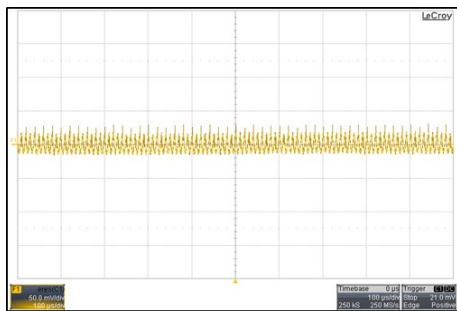


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

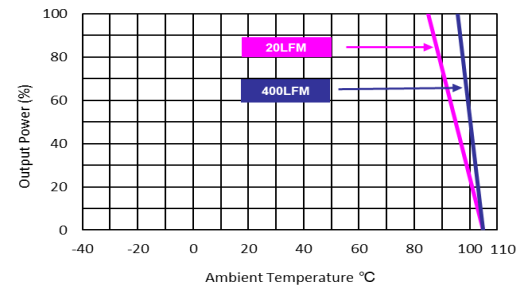


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-12D12HI

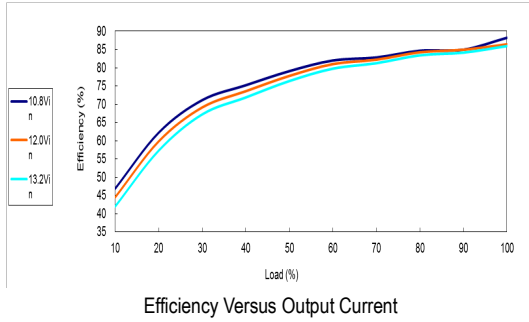


Efficiency Versus Output Current

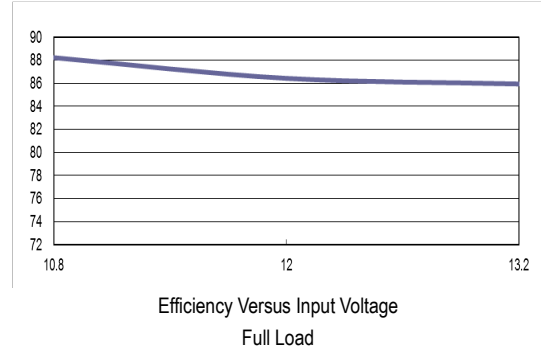

Efficiency Versus Input Voltage Full Load

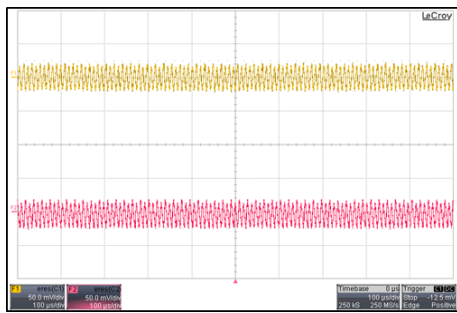


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

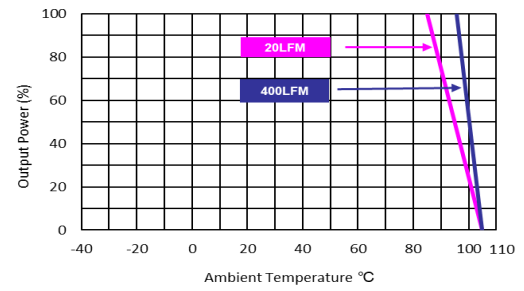


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-12D15HI

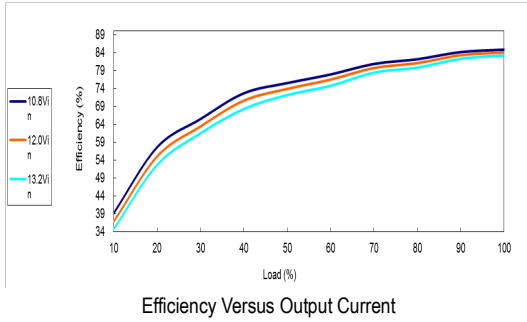


Efficiency Versus Output Current

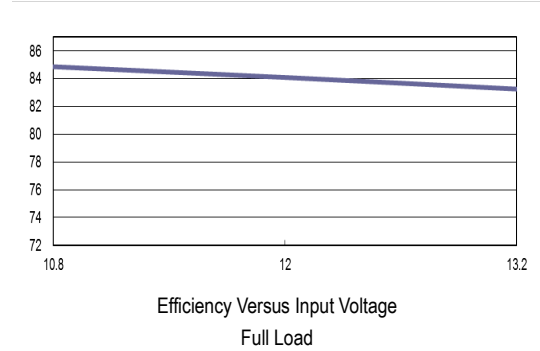

Efficiency Versus Input Voltage Full Load

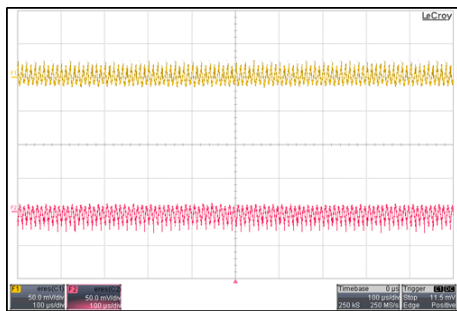


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

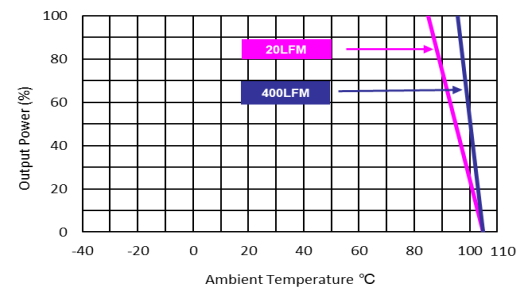


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-24S05HI

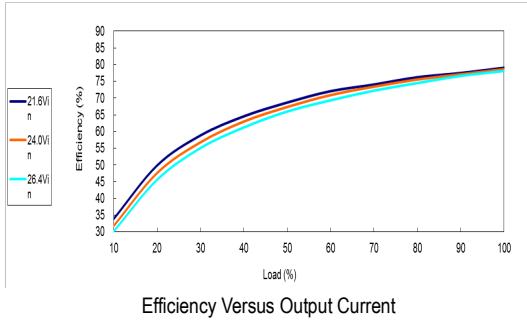


Efficiency Versus Output Current

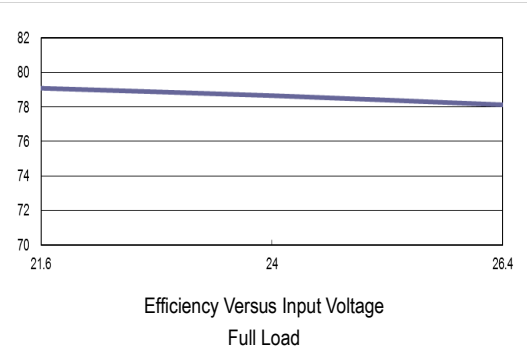

Efficiency Versus Input Voltage Full Load

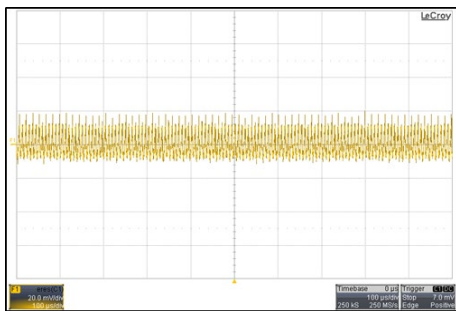


Typical Output Ripple and Noise
 $V_{in} = V_{in\ nom}$; Full Load

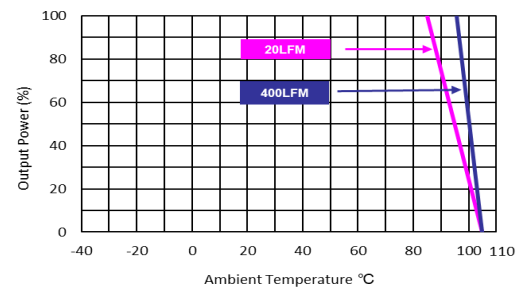


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in} = V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-24S12HI

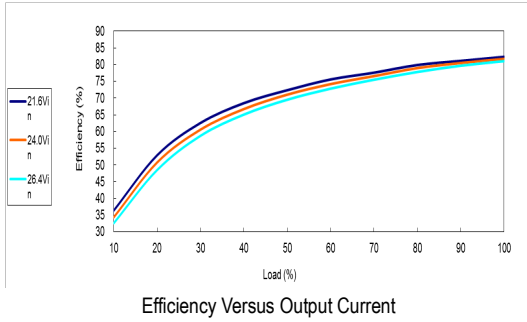


Efficiency Versus Output Current

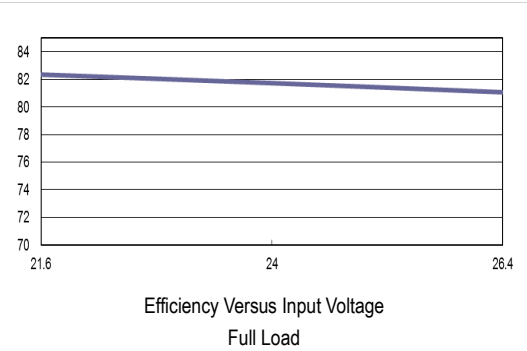

Efficiency Versus Input Voltage Full Load

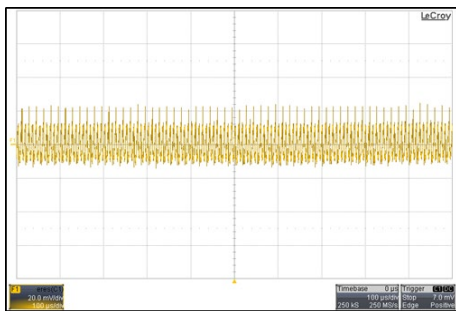


Typical Output Ripple and Noise
 $V_{in}=V_{in nom}$; Full Load

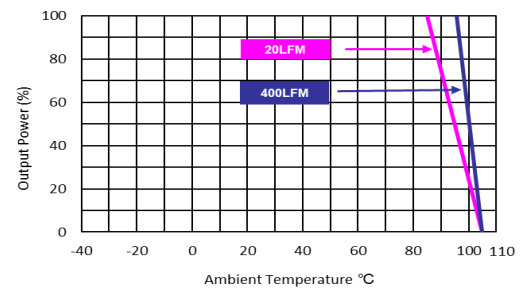


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-24S15HI

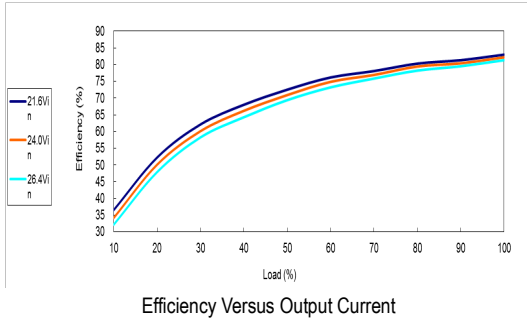


Efficiency Versus Output Current

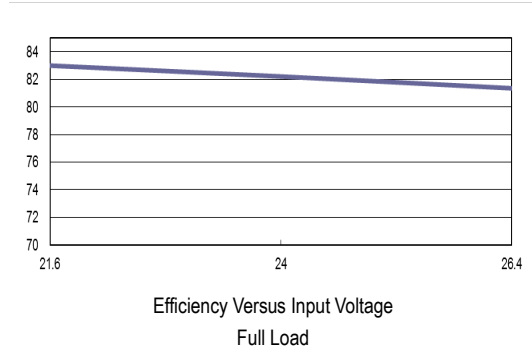

Efficiency Versus Input Voltage Full Load

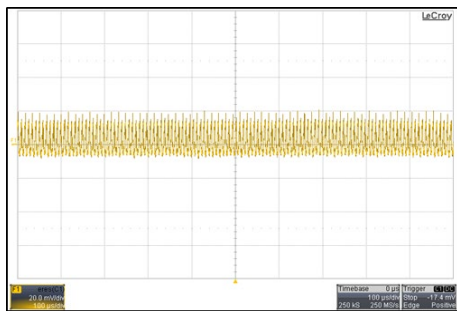


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

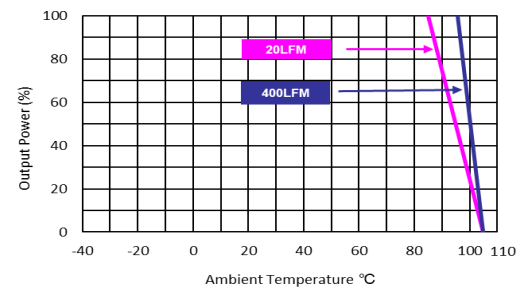


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-24D12HI

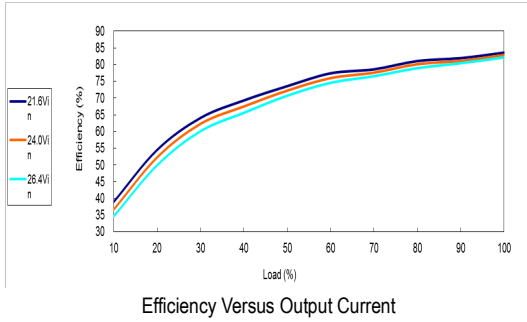


Efficiency Versus Output Current

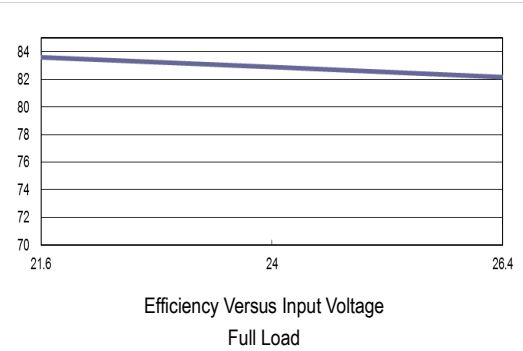

Efficiency Versus Input Voltage Full Load

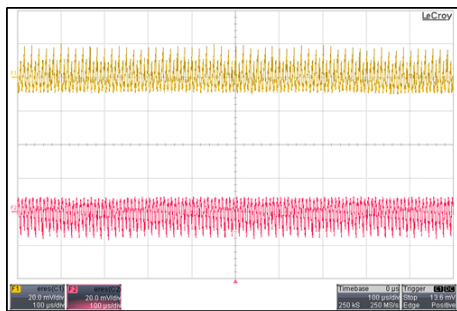


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

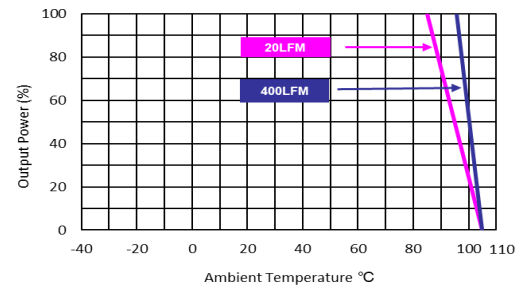


Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Characteristic Curves


All test conditions are at 25°C The figures are identical for MSCEU01-24D15HI

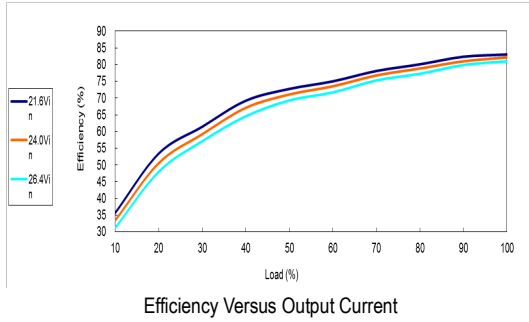


Efficiency Versus Output Current

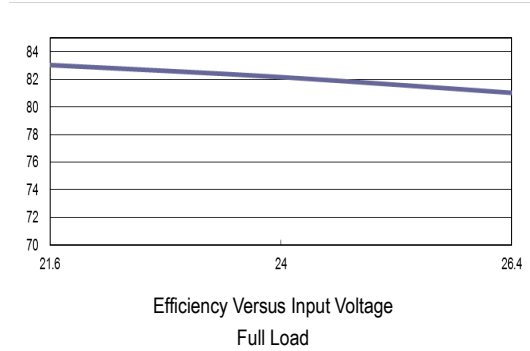

Efficiency Versus Input Voltage Full Load


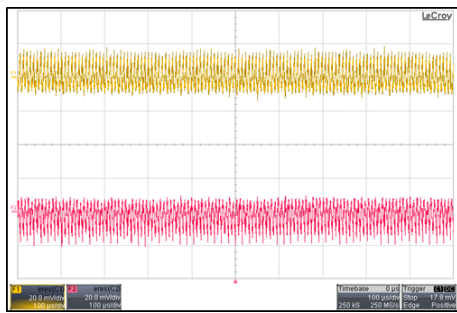


Typical Output Ripple and Noise
 $V_{in}=V_{in\ nom}$; Full Load

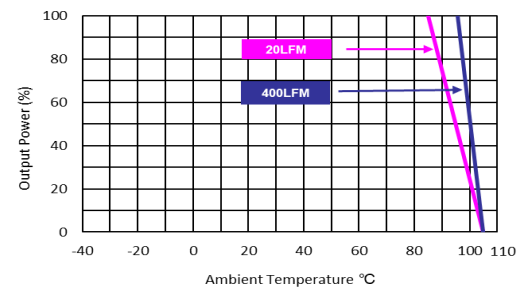

Derating Output Current Versus Ambient Temperature and Airflow
 $V_{in}=V_{in\ nom}$

Package Specifications

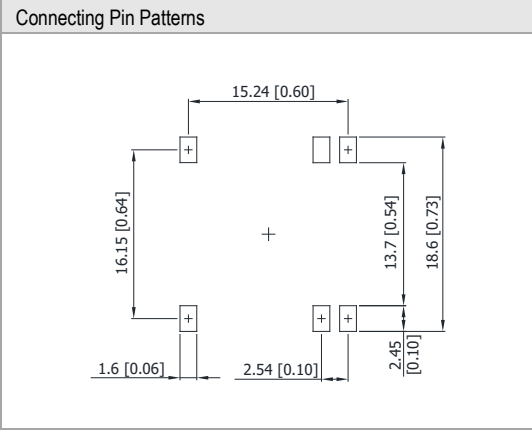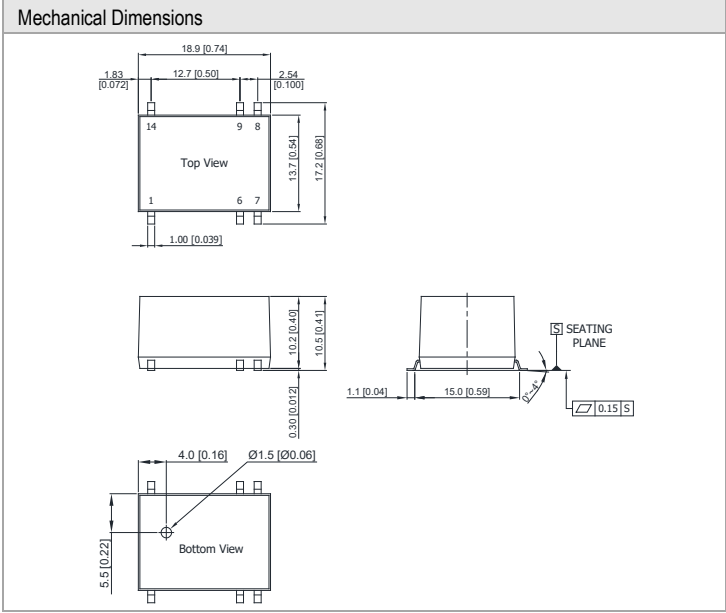

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X \pm 0.5 (X.XX \pm 0.02)
X.XX \pm 0.25 (X.XXX \pm 0.01)
- ▶ Pins \pm 0.05 (\pm 0.002)

Pin Connections		
Pin	Single Output	Dual Output
1	-Vin	-Vin
6	NC	Common
7	NC	-Vout
8	+Vout	+Vout
9	-Vout	Common
14	+Vin	+Vin


Physical Characteristics	
Case Size	: 18.9x13.7x10.2 mm (0.74x0.54x0.40 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze
Weight	: 4.1g

NC: No Connection

Test Setup

Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7 μ F capacitor if the output specifications undefine C_{out}. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

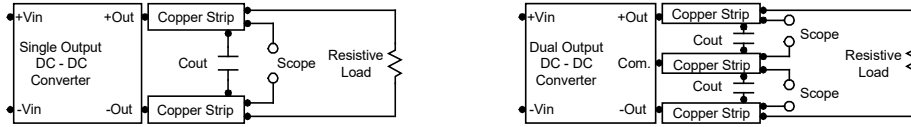

Technical Notes

Maximum Capacitive Load


The MSCEU01-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100 μ F maximum capacitive load for dual outputs and 220 μ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.


In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 2.2 μ F for the 5V input devices, a 1.0 μ F for the 12V input devices and a 0.47 μ F for the 24V input devices.

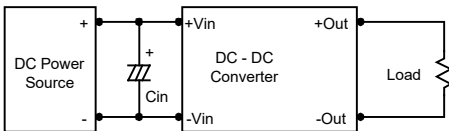


Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

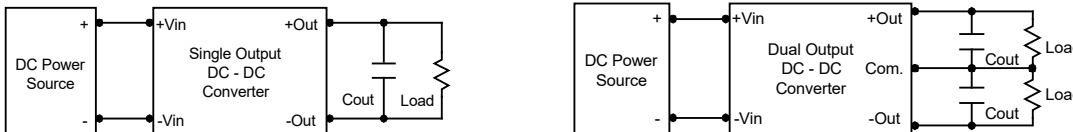

Thermal Considerations


Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.



Packaging Information for Tube

Tube


Plug

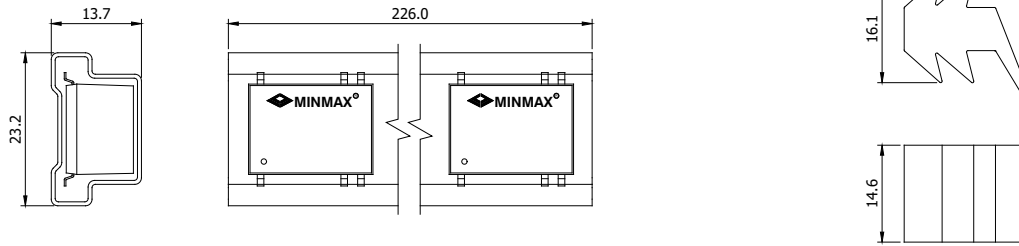


Unit: mm
10 PCS per TUBE

Packaging Information for Tape & Reel

Tape

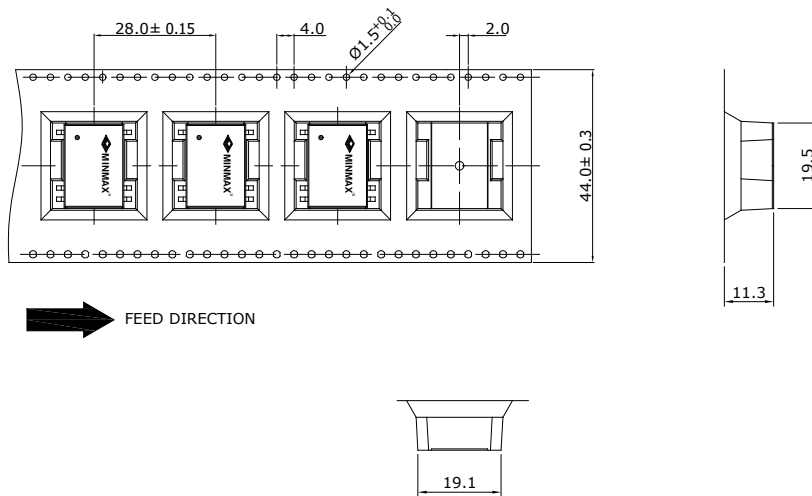

Reel

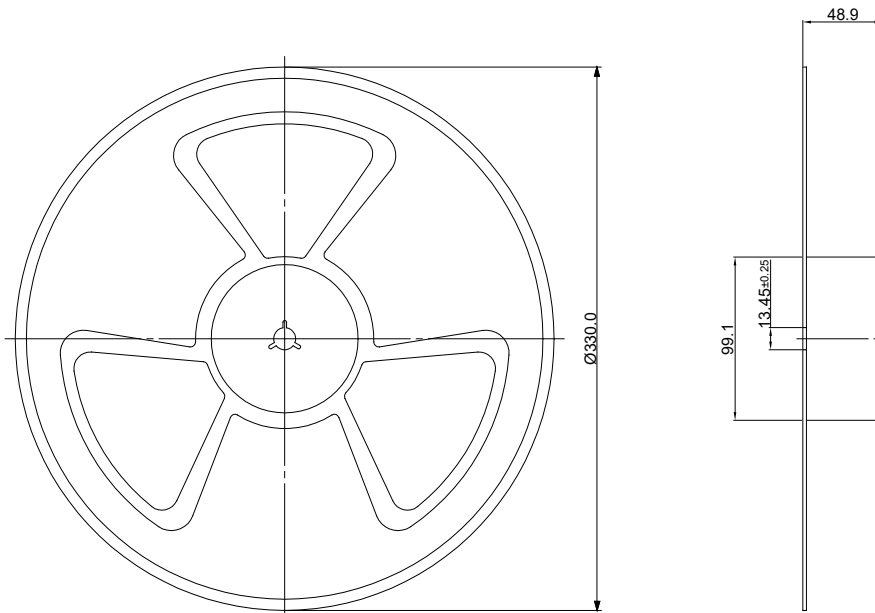

Packaging Style	Quantity
With Heatsink Tube	N/A
Tape and Reel to IEC 286-3 Specifications	200

Soldering and Reflow Considerations

Profile	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate(Ts max. To Tp)	3°C/second max.	3°C/second max.
Preheat <ul style="list-style-type: none"> · Temperature Min (T_{Smin}) · Temperature Max (T_{Smax}) · Time (T_{Smin} to T_{Smax}) (ts) 	100°C 150°C 60~120 seconds	150°C 200°C 60~180 seconds
Time maintained above: <ul style="list-style-type: none"> · Temperature (T_L) · Time (t_L) 	183°C 60~150 seconds	217°C 60~150 seconds
Peak Temperature (Tp)	See Table 4-1	See Table 4-2
Time within 5°C of actual Peak Temperature (tp) ²	10~30 seconds	20~40 seconds
Ramp-down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

Note 1: All temperatures refer to topside of the package, measured on the package body surface.

Note 2: Time within 5°C of actual peak temperature (tp) specified for the reflow profiles is a "supplier" minimum and "user" maximum.

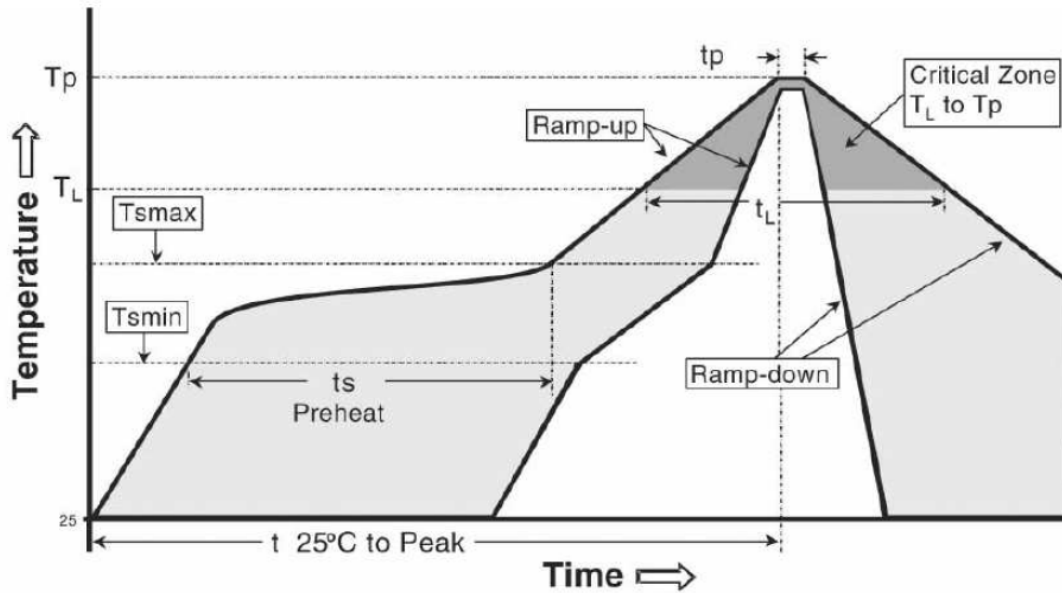


Table 4-1 SnPb Eutectic Process-Classification Temperatures (T_c)

Package Thickness	Volume mm ³	Volume mm ³
<2.5mm	<350	≥350
≥2.5mm	235°C	220°C
	220°C	220°C

Table 4-2 Pb-Free Process-Classification Temperatures (T_c)

Package Thickness	Volume mm ³	Volume mm ³	Volume mm ³
<1.6mm	<350	350-2000	>2000
1.6mm-2.5mm	260°C	260°C	260°C
>2.5mm	260°C	250°C	245°C
	250°C	245°C	245°C

Part Number Structure								
M	SC	EU	01	-	05	S	05	HI
Package Type SMD-14	Application Ultra-High Isolation	Output Power 1 Watt	Input Voltage Range			Output Quantity	Output Voltage	I/O Isolation Voltage
	±10% Input Range		05: 4.5 ~ 5.5 VDC		S: Single	05: 5 VDC	8000 VDC	
	Output Regulation Unregulated		12: 10.8 ~ 13.2 VDC		D: Dual	12: 12 VDC		
			24: 21.6 ~ 26.4 VDC			15: 15 VDC		

MTBF and Reliability

The MTBF of MSCEU01-HI series of DC-DC converters has been calculated using

MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.

Model	MTBF	Unit
MSCEU01-05S05HI	4,774,882	Hours
MSCEU01-05S12HI	5,042,214	
MSCEU01-05S15HI	5,239,310	
MSCEU01-05D12HI	5,042,214	
MSCEU01-05D15HI	5,303,730	
MSCEU01-12S05HI	4,771,507	
MSCEU01-12S12HI	4,974,054	
MSCEU01-12S15HI	5,039,132	
MSCEU01-12D12HI	4,974,054	
MSCEU01-12D15HI	5,039,132	
MSCEU01-24S05HI	4,774,937	
MSCEU01-24S12HI	5,042,198	
MSCEU01-24S15HI	5,040,895	
MSCEU01-24D12HI	5,042,198	
MSCEU01-24D15HI	5,040,895	