



**MINMAX<sup>®</sup>**

MDWI03 Series


Electric Characteristic Note

# MDWI03 Series EC Note

DC-DC CONVERTER 3W, DIP Package

## Features

- ▶ Compact DIP-16 Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Remote On/Off Control
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval

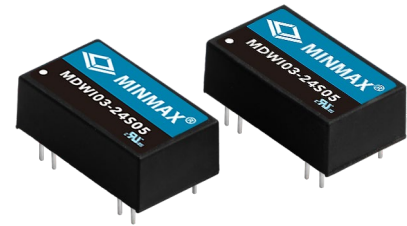

## Applications

- ▶ Distributed power architectures
- ▶ Workstations
- ▶ Computer equipment
- ▶ Communications equipment

## Product Overview

Minmax's MDWI03 series power modules are in mini-DIP DC-DC converters that operate over input voltage ranges of 9-36VDC and 18-75VDC which provide precisely regulated output voltages of 3.3V, 5V, 12V, 15V, 24V,  $\pm 5V$ ,  $\pm 12V$  and  $\pm 15VDC$ . Pin compatible with the MDW1000 series, the MDWI03 offers a power rating up to 3W and a typical full-load efficiency of 80%, under-voltage, over load, short circuit protection and remote on/off control. The MDWI03 series is an excellent selection for data communication equipment, mobile battery driven equipment, distributed power system, telecommunication equipment, mixed analog/digital subsystem, process/machine control equipment, computer peripheral equipment and industrial robot system.

## Table of contents

Model Selection Guide .....	P2	Test Setup.....	P21
Input Specifications.....	P2	Technical Notes .....	P21
Remote On/Off Control.....	P2	Remote On/Off Implementation.....	P22
Output Specifications.....	P2	Packaging Information.....	P22
General Specifications.....	P3	Wave Soldering Considerations .....	P23
Environmental Specifications .....	P3	Hand Welding Parameter .....	P23
Characteristic Curves .....	P4	Part Number Structure .....	P24
Package Specifications .....	P20	MTBF and Reliability .....	P24
Recommended Pad Layout for Single & Dual Output Converter.....	P20		

**Model Selection Guide**

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Max. capacitive Load	Efficiency (typ.)
			Max.	Min.	@Max. Load	@No Load		@Max. Load
	VDC	VDC	mA	mA	mA(typ.)	mA(typ.)	μF	%
<b>MDWI03-24S033</b>	24 (9 ~ 36)	3.3	600	90	110	30	220	75
<b>MDWI03-24S05</b>		5	600	90	160		220	78
<b>MDWI03-24S12</b>		12	250	38	156		47	80
<b>MDWI03-24S15</b>		15	200	30	156		47	80
<b>MDWI03-24S24</b>		24	125	19	156		47	80
<b>MDWI03-24D05</b>		±5	±300	±45	162		47#	77
<b>MDWI03-24D12</b>		±12	±125	±19	156		47#	80
<b>MDWI03-24D15</b>		±15	±100	±15	156		47#	80
<b>MDWI03-48S033</b>	48 (18 ~ 75)	3.3	600	90	55	20	220	75
<b>MDWI03-48S05</b>		5	600	90	80		220	78
<b>MDWI03-48S12</b>		12	250	38	78		47	80
<b>MDWI03-48S15</b>		15	200	30	78		47	80
<b>MDWI03-48S24</b>		24	125	19	78		47	80
<b>MDWI03-48D05</b>		±5	±300	±45	81		47#	77
<b>MDWI03-48D12</b>		±12	±125	±19	78		47#	80
<b>MDWI03-48D15</b>		±15	±100	±15	78		47#	80

# For each output

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	4.5	6	8.5	
	48V Input Models	8.5	12	17	
Under Voltage Shutdown	24V Input Models	---	---	8	
	48V Input Models	---	---	16	
Short Circuit Input Power		---	---	2000	mW
Input Filter	All Models	Internal PI Type			
Conducted EMI		Compliance to EN 55022, class A			

**Remote On/Off Control**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On		2.5V ~ 5.5V or Open Circuit			
Converter Off		-0.7V ~ 0.8V			
Control Input Current (on)	Vctrl = Min. to Max.	---	---	-400	μA
Control Input Current (off)	Vctrl = Min. to Max.	---	---	-400	μA
Control Common		Referenced to Negative Input			
Standby Input Current	Nominal Vin	---	---	5	mA

**Output Specifications**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	±2.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±1.0	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.5	±1.0	%
Load Regulation	Io=15% to 100%	---	±0.5	±1.2	%
Ripple & Noise	0-20 MHz Bandwidth	---	50	100	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change	---	300	600	μsec
Transient Response Deviation		---	±3	---	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Foldback	110	150	---	%
Short Circuit Protection		Continuous, Automatic Recovery			

### General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	350	500	pF
Switching Frequency		---	350	---	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	300,000			Hours
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1 & 60950-1(CB-report)				

### Environmental Specifications


Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	°C
Case Temperature	---	+105	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

### Notes


- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact MINMAX.
- 6 Specifications are subject to change without notice.

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MDWI03-24S033

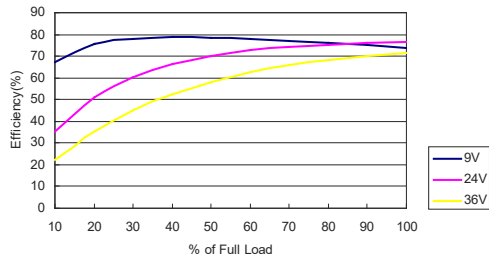


Efficiency Versus Output Current

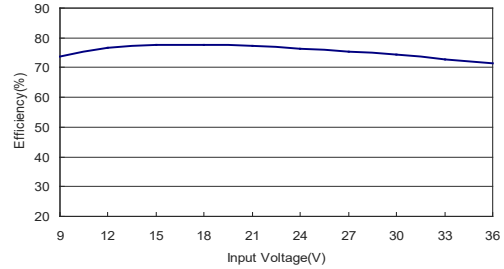


Efficiency Versus Input Voltage Full Load

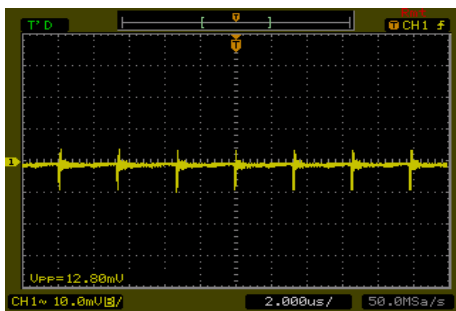


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

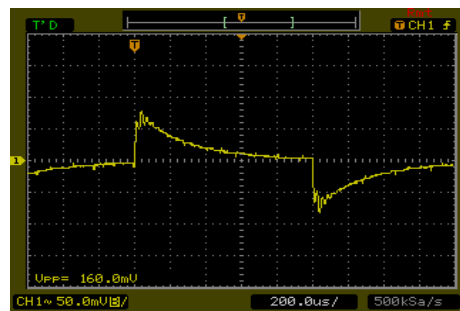


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

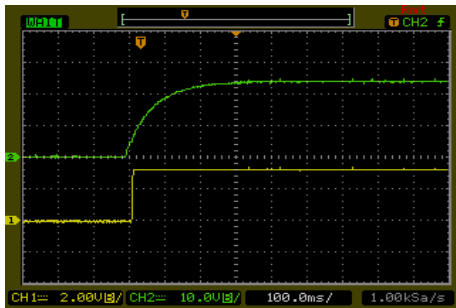

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

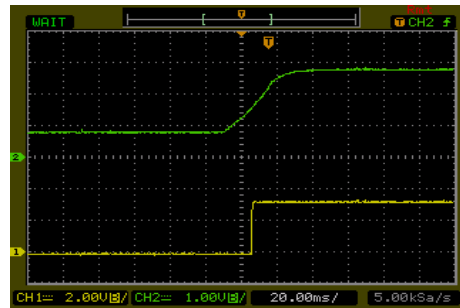




ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

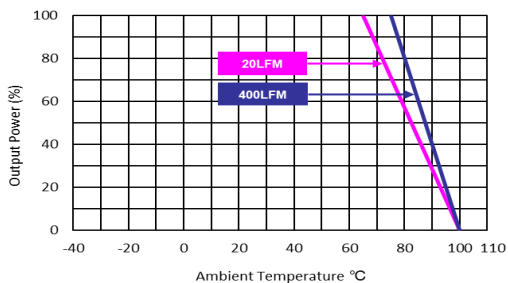


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-24S05

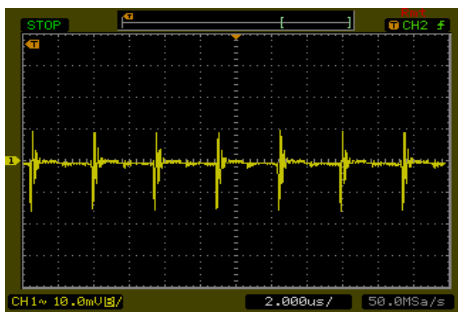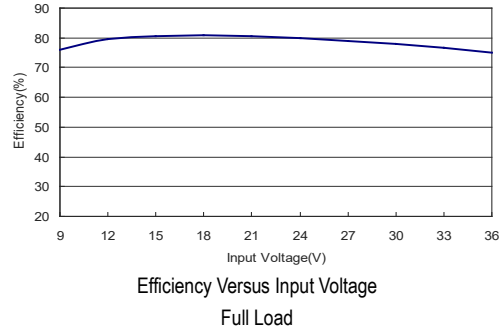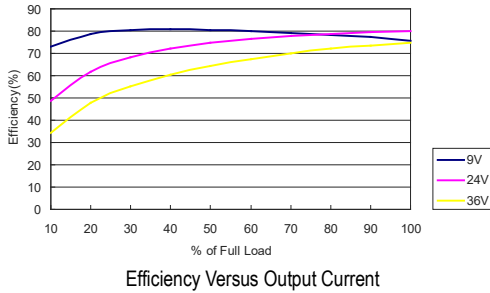


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

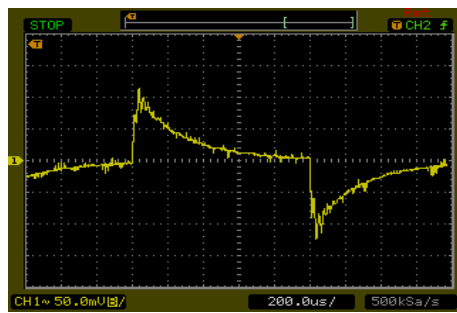


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

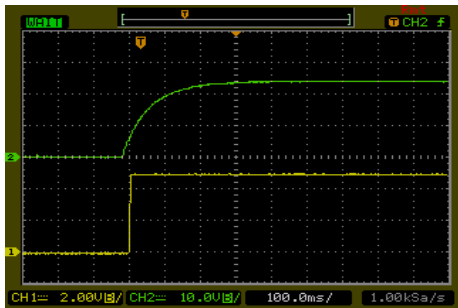

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

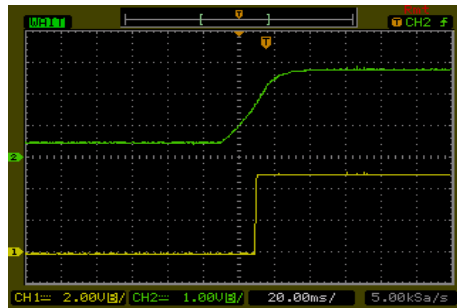


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

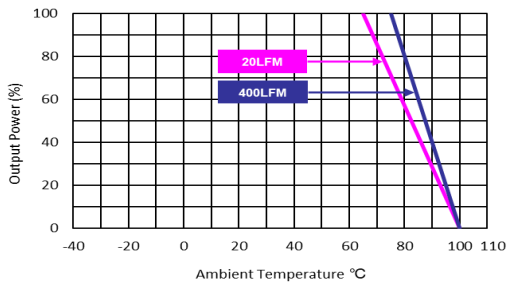


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-24S12

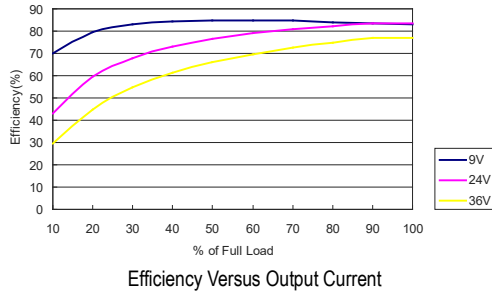


Efficiency Versus Output Current

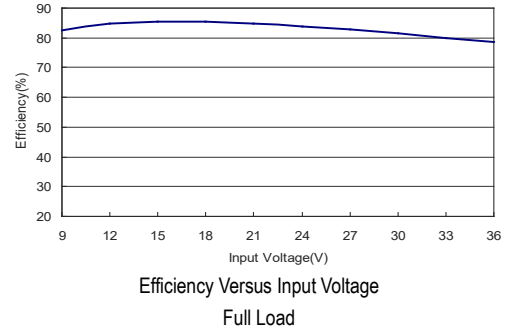


Efficiency Versus Input Voltage Full Load

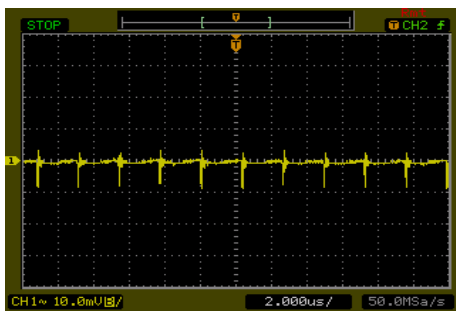


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

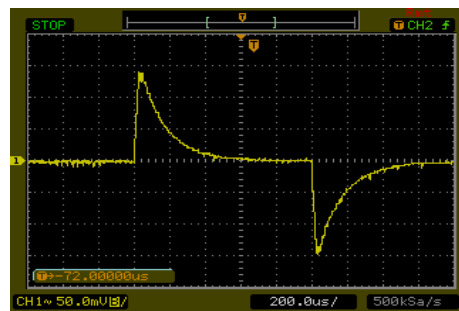


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

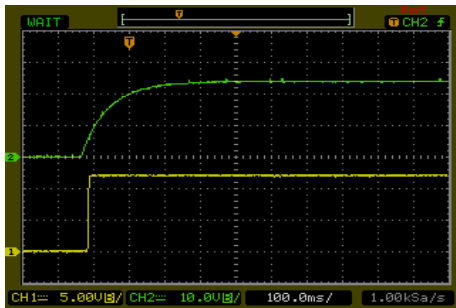

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

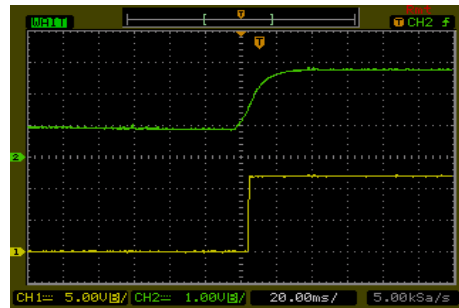


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

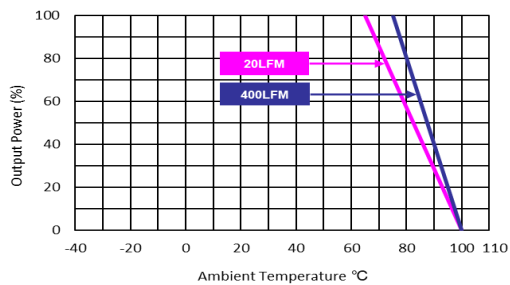


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-24S15

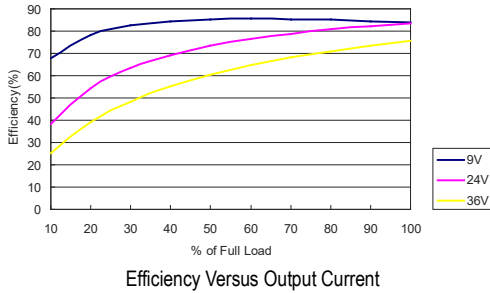


Efficiency Versus Output Current

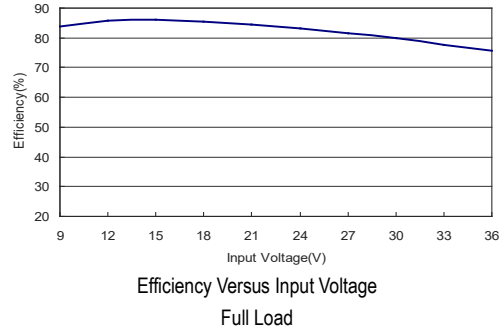


Efficiency Versus Input Voltage Full Load

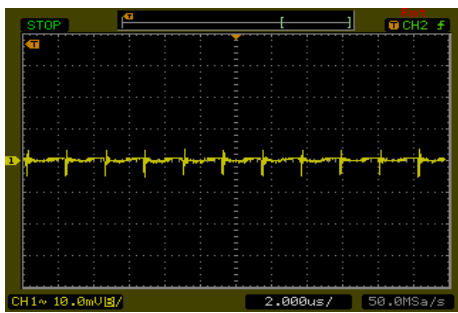


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

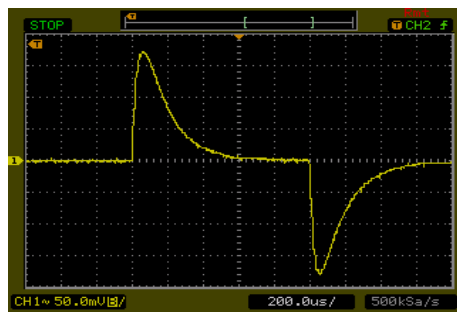


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

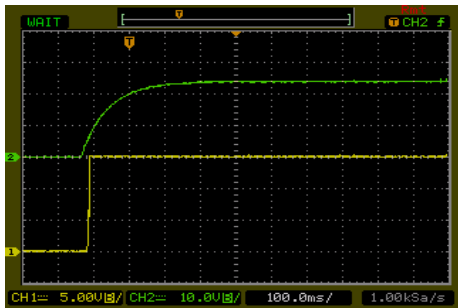

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

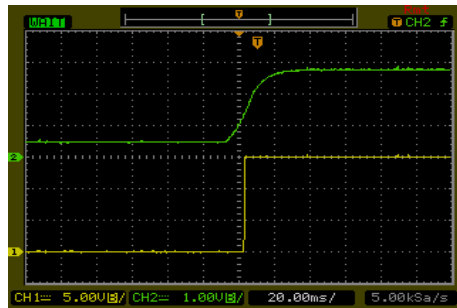

ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

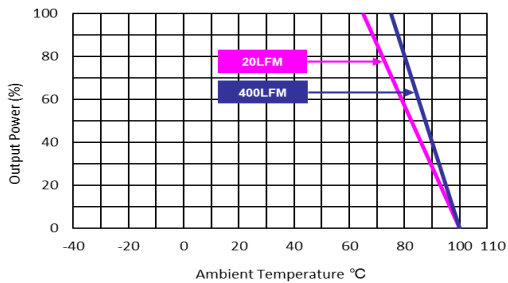


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$




**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MDWI03-24S24

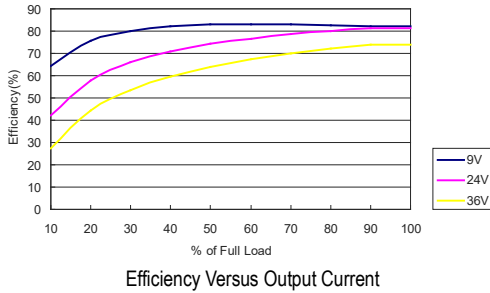


Efficiency Versus Output Current

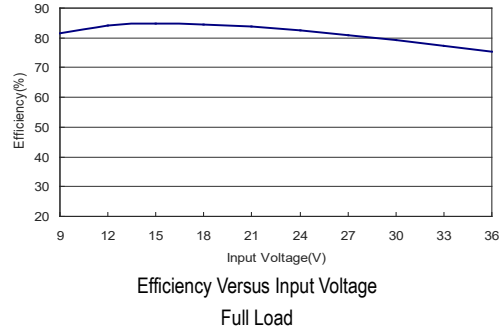


Efficiency Versus Input Voltage Full Load

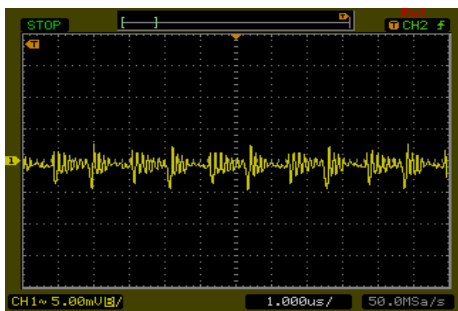


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

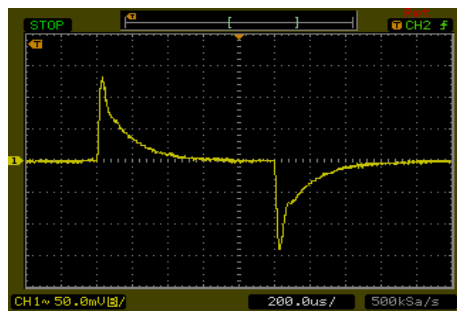


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

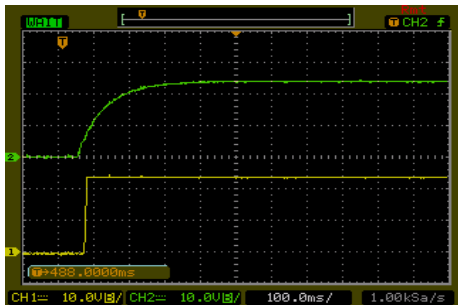

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

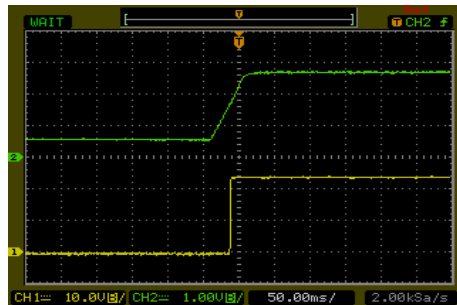


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

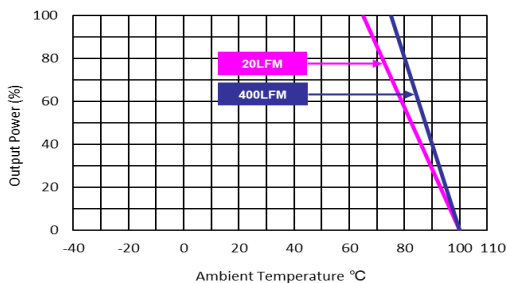


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-24D05

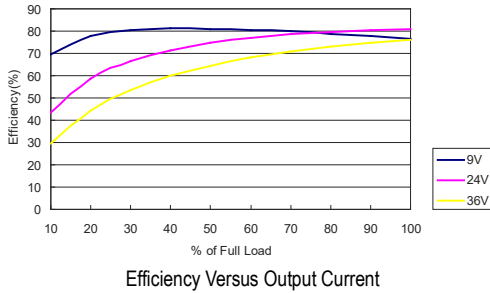


Efficiency Versus Output Current

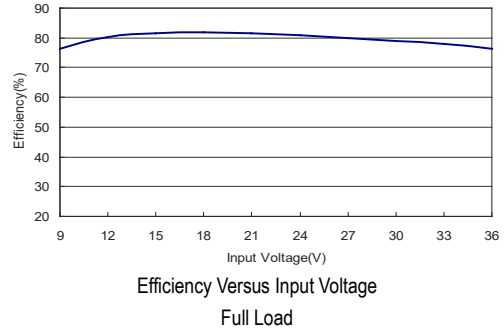


Efficiency Versus Input Voltage Full Load

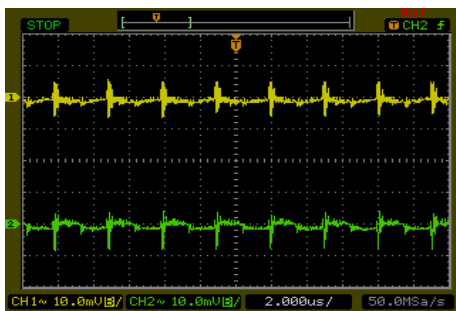


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

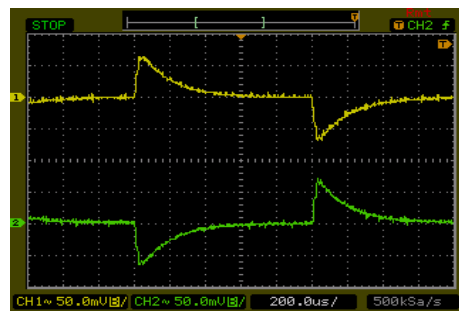


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

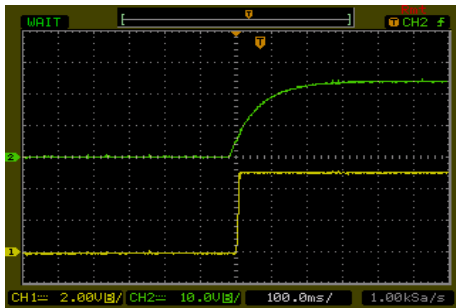

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

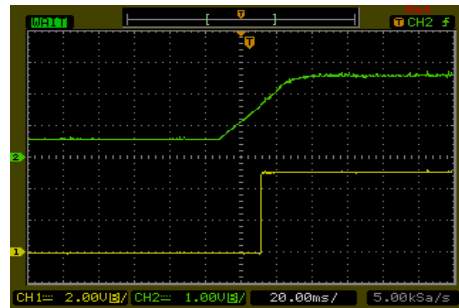


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

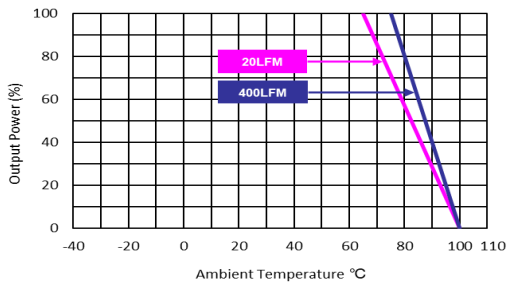


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-24D12

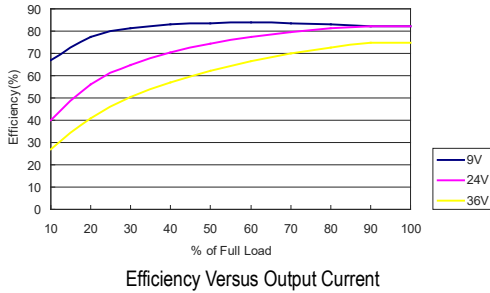

Efficiency Versus Output Current

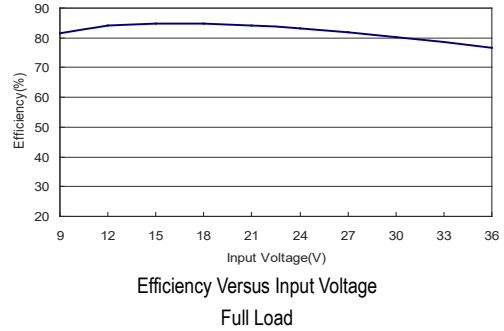


Efficiency Versus Input Voltage Full Load

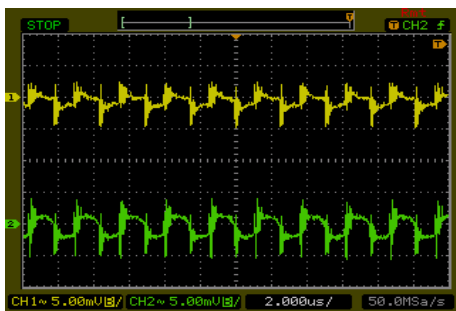


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load




Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

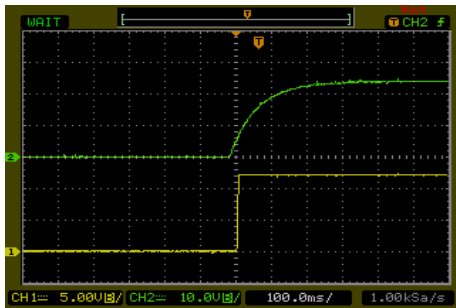

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

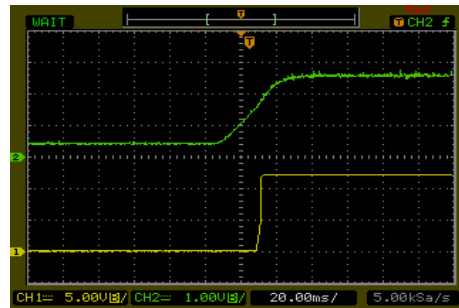




ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

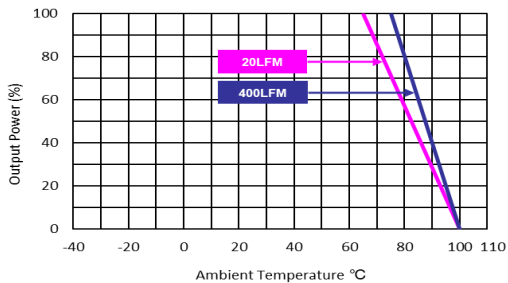


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-24D15

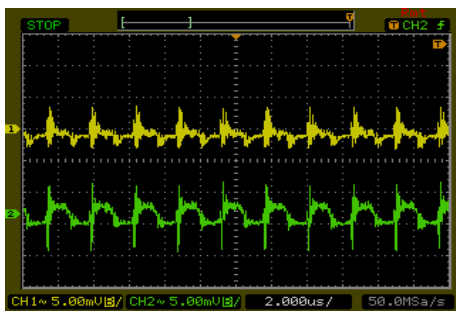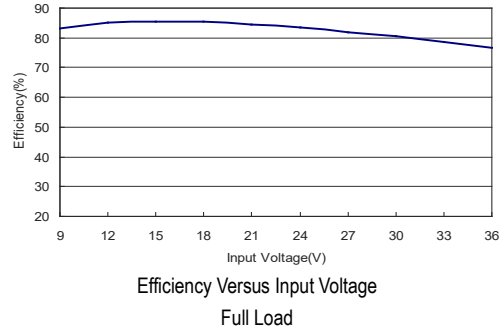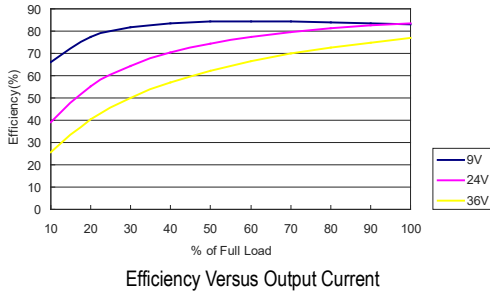


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

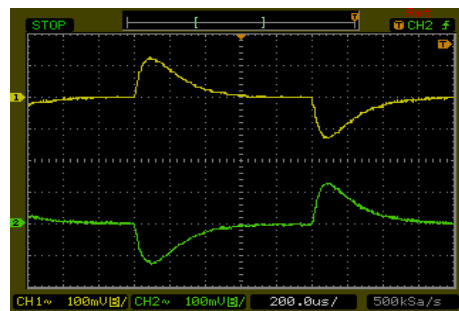


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

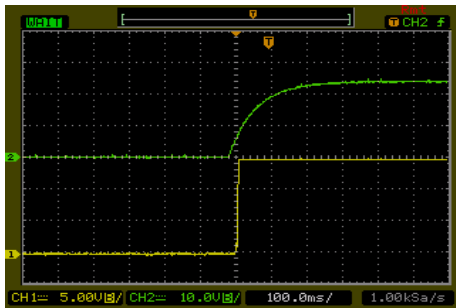

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

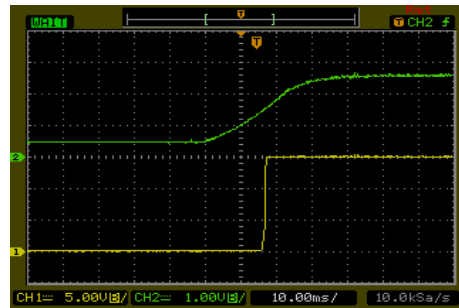


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

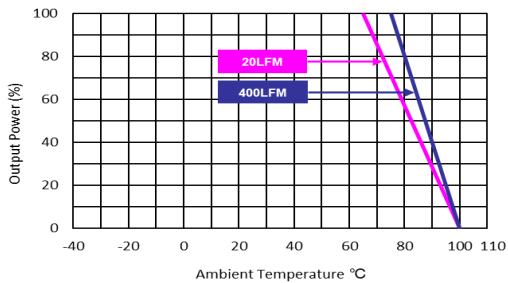


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-48S033

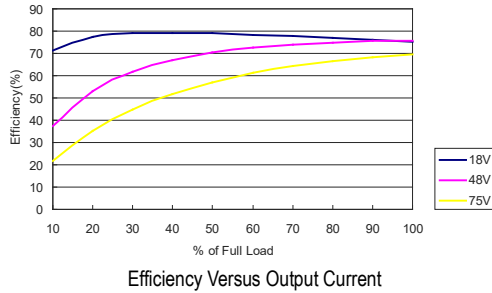


Efficiency Versus Output Current

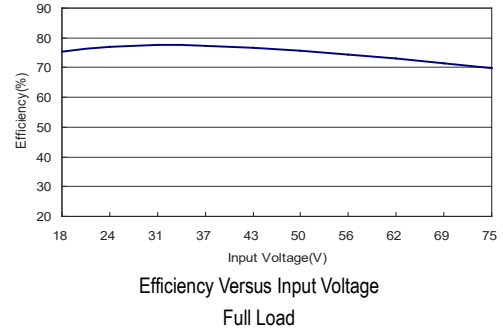


Efficiency Versus Input Voltage Full Load

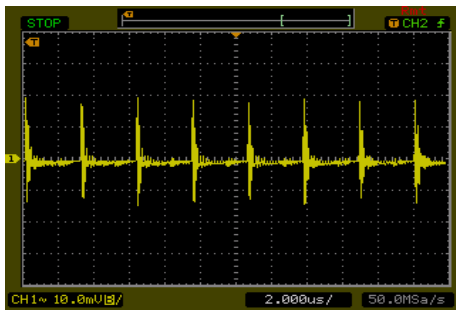


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

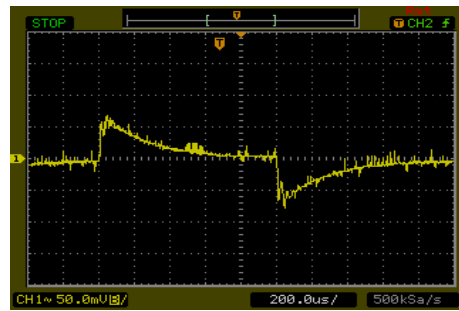


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

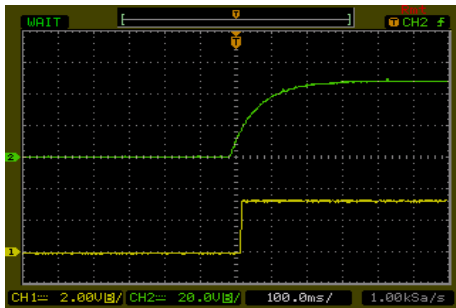

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

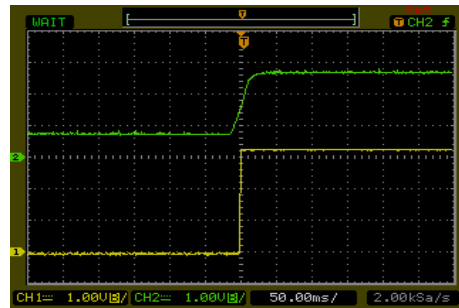


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

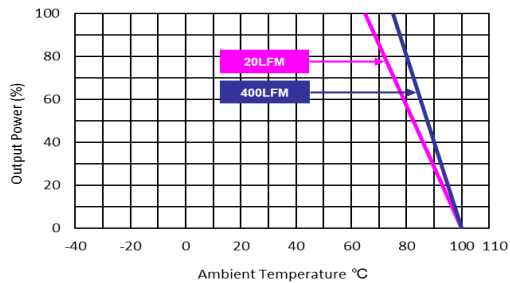


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-48S05

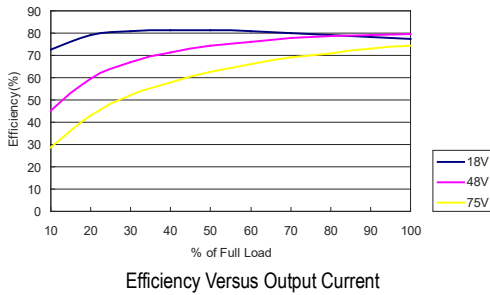


Efficiency Versus Output Current

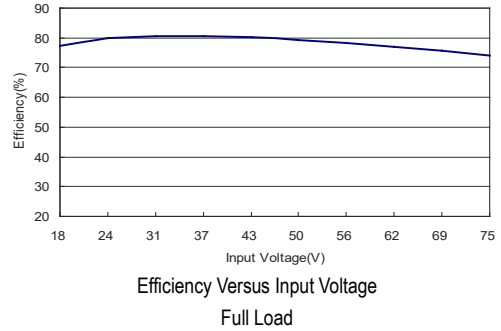


Efficiency Versus Input Voltage Full Load

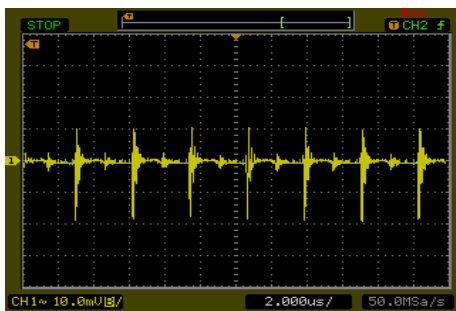


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

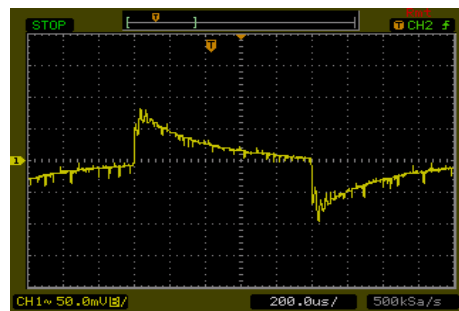


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

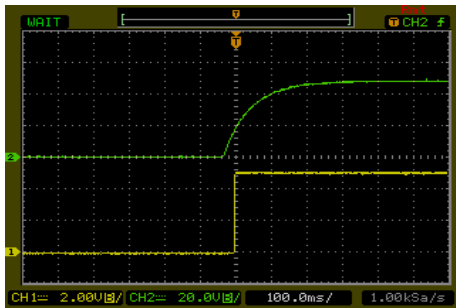

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

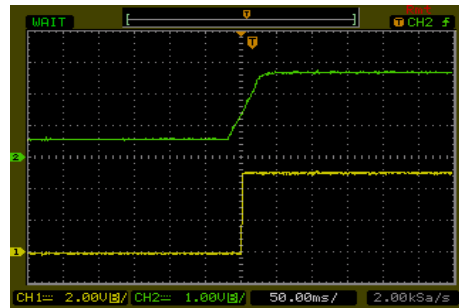


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

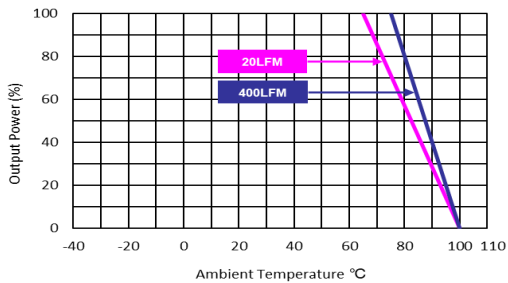


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-48S12

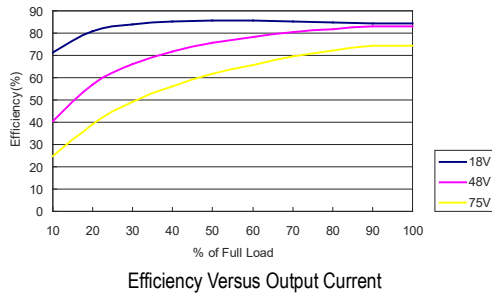


Efficiency Versus Output Current

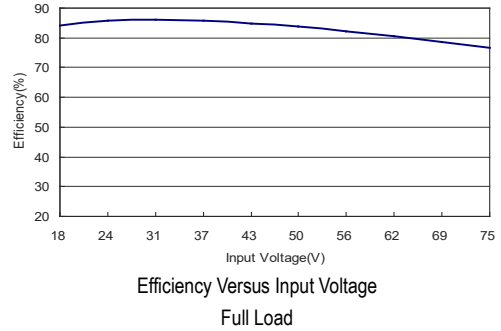


Efficiency Versus Input Voltage Full Load

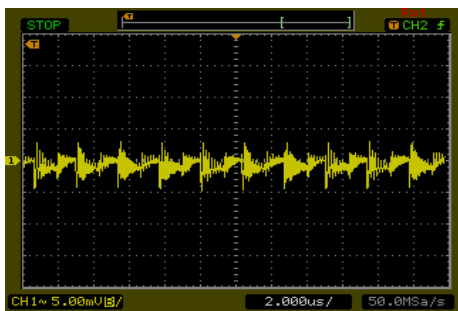


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

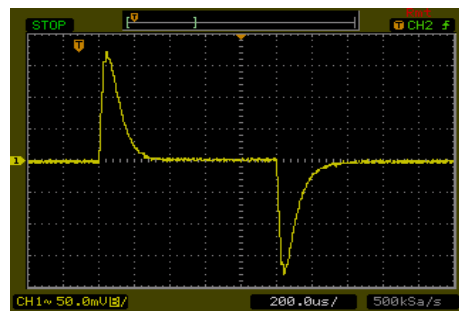


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

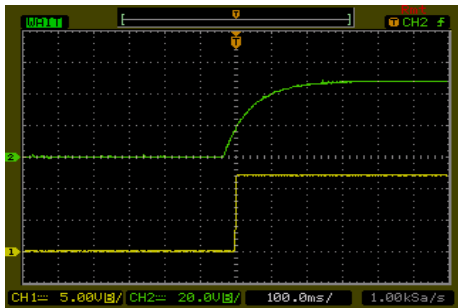

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

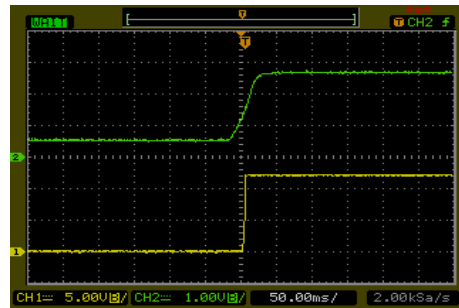


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

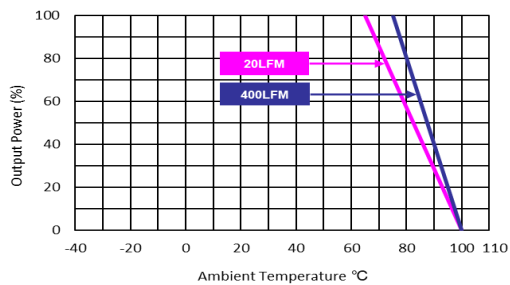


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-48S15

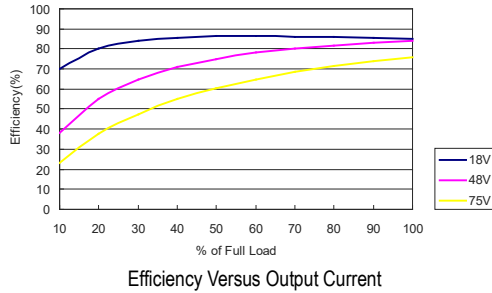


Efficiency Versus Output Current

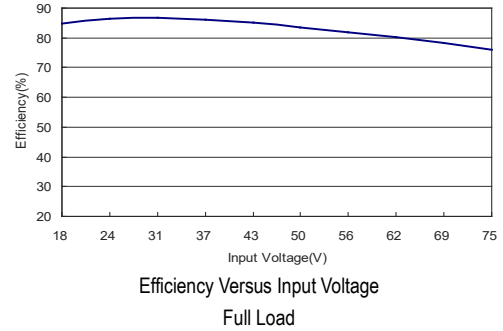


Efficiency Versus Input Voltage  
Full Load

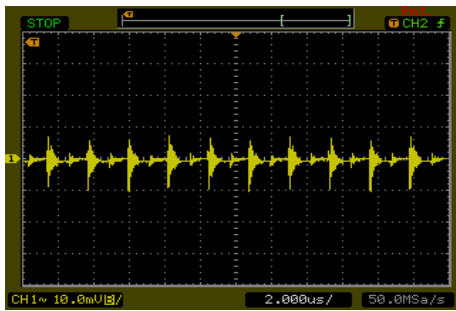


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

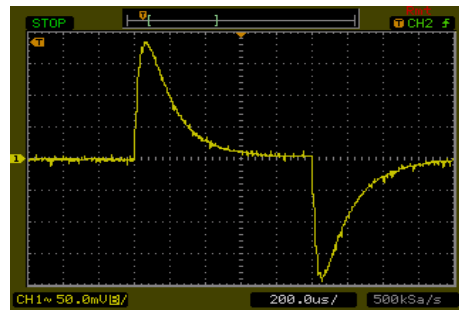


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

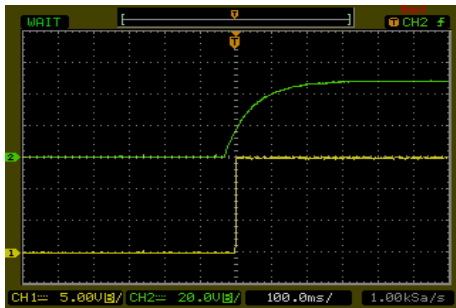

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

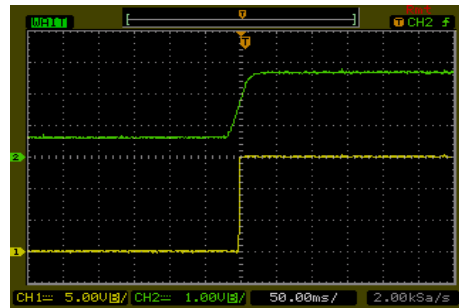

ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

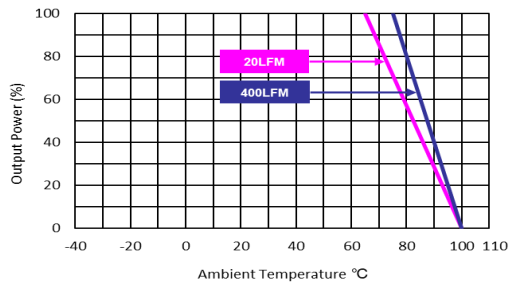


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$




**Characteristic Curves**


All test conditions are at 25°C The figures are identical for MDWI03-48S24

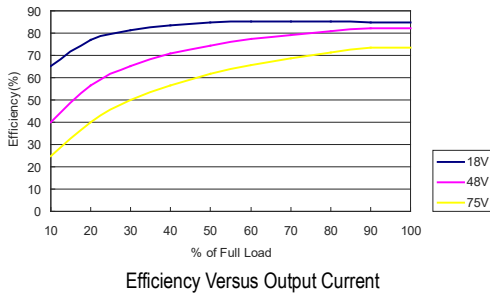


Efficiency Versus Output Current

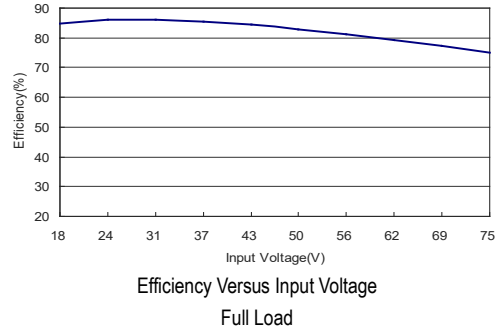


Efficiency Versus Input Voltage Full Load

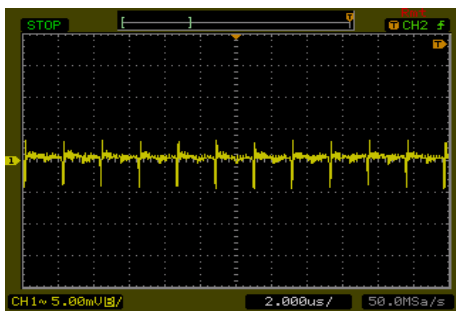


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

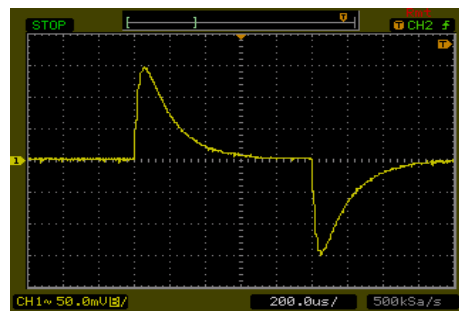


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

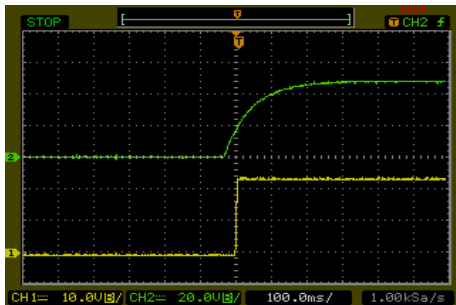

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

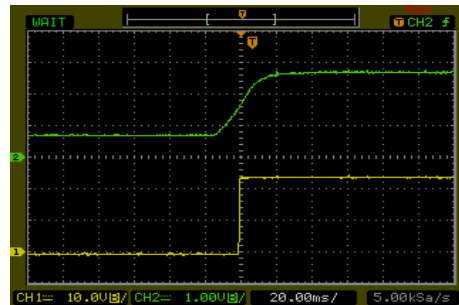


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

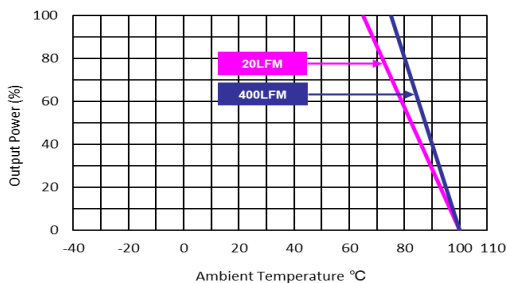


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**

All test conditions are at 25°C. The figures are identical for MDWI03-48D05

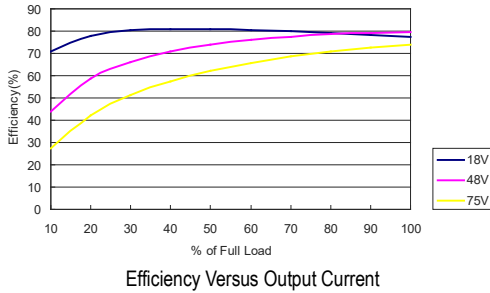


Efficiency Versus Output Current

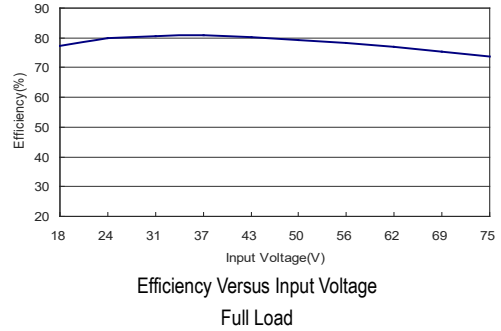


Efficiency Versus Input Voltage Full Load




Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

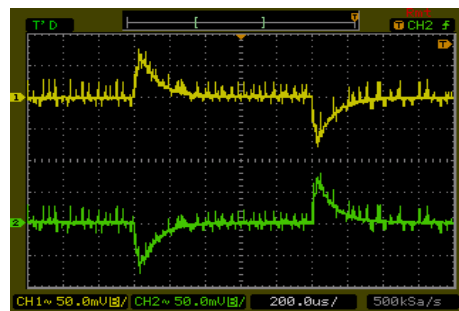


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

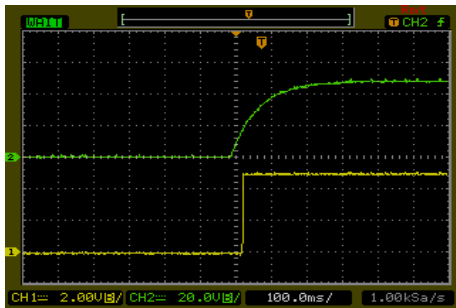

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

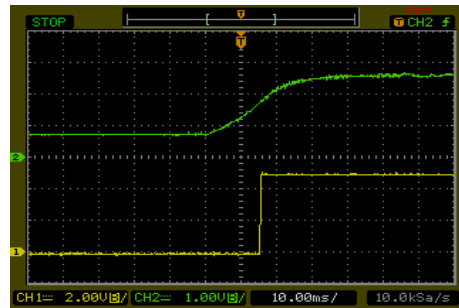




ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

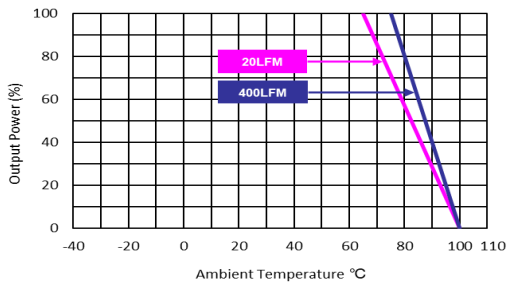


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**


All test conditions are at 25°C. The figures are identical for MDWI03-48D12

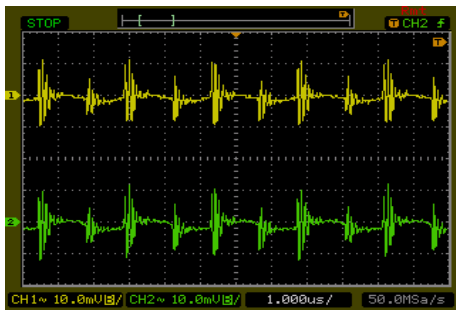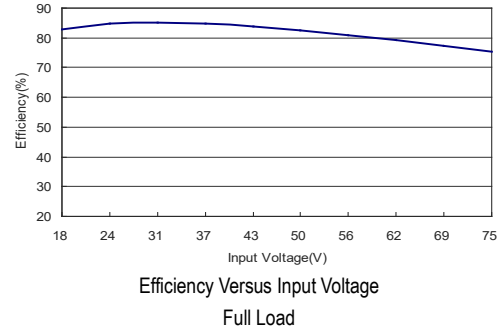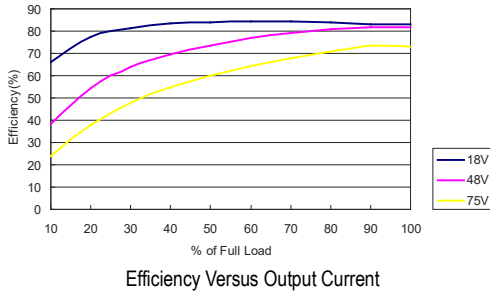


Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load

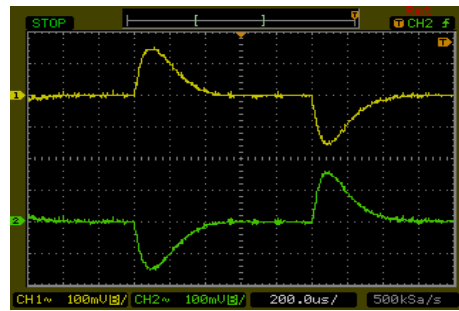


Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

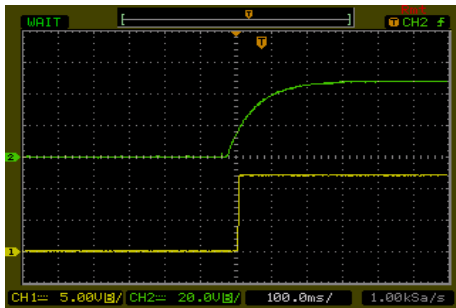

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

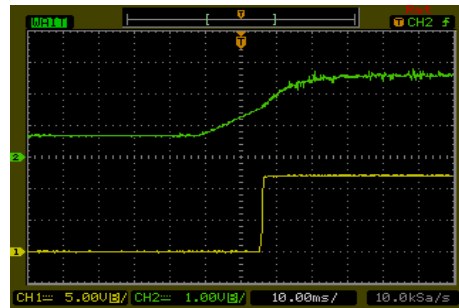


ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

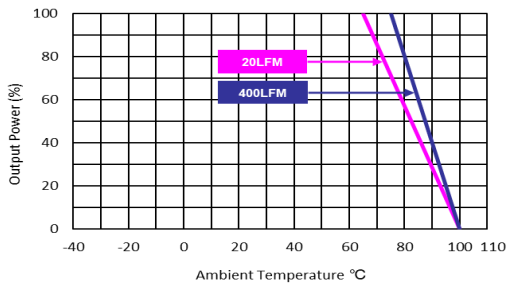


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$

**Characteristic Curves**

All test conditions are at 25°C The figures are identical for MDWI03-48D15

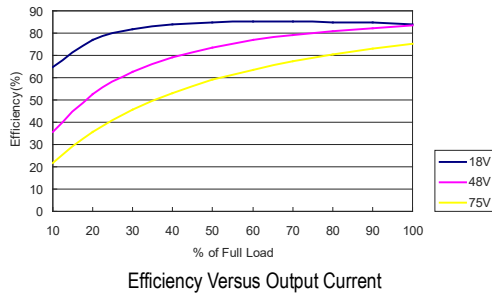

Efficiency Versus Output Current

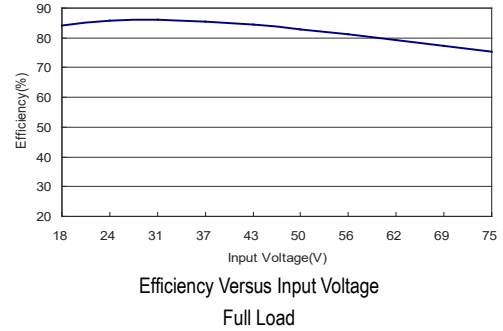


Efficiency Versus Input Voltage Full Load




Typical Output Ripple and Noise  
 $V_{in}=V_{in\ nom}$ ; Full Load




Transient Response to Dynamic Load Change  
from 100% to 75% of Full Load;  $V_{in}=V_{in\ nom}$

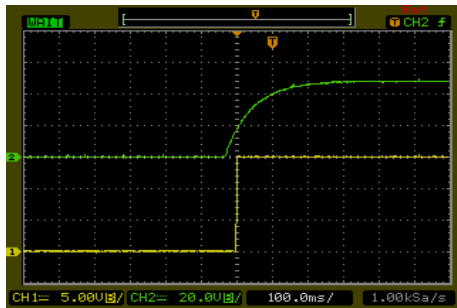

Typical Input Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

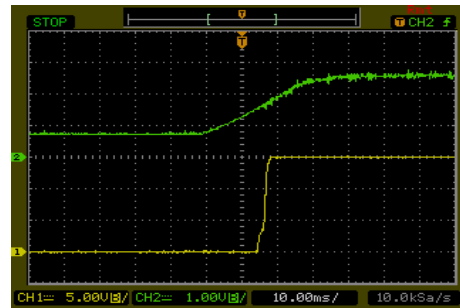

ON/OFF Voltage Start-Up and Output Rise Characteristic  
 $V_{in}=V_{in\ nom}$ ; Full Load

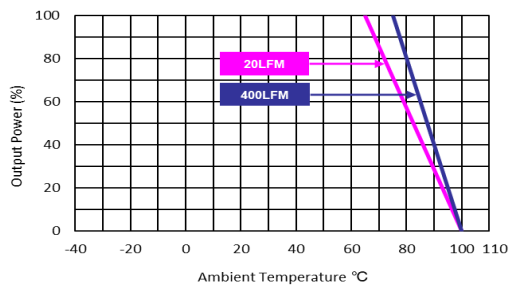


Derating Output Current Versus Ambient Temperature  
 $V_{in}=V_{in\ nom}$



### Test Setup


#### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 kHz) to simulate source impedance. Capacitor  $C_{in}$  offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

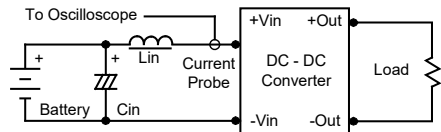

#### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

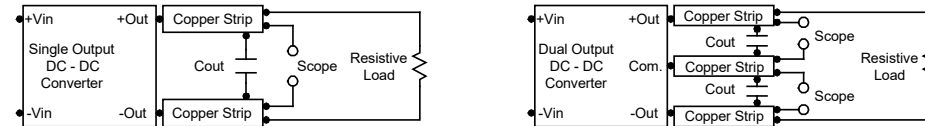

### Technical Notes

#### Remote On/Off


Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is -0.7V to 0.8V. A logic high is 2.5V to 5.5V. The maximum sink current of the switch at on/off terminal during a logic low is -300  $\mu$ A. The maximum sink current of the switch at on/off terminal during a logic high is -200 $\mu$ A or open.

#### Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


#### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 4.7 $\mu$ F for the 24V input devices and a 2.2 $\mu$ F for the 48V devices.

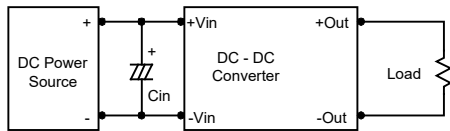

#### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 $\mu$ F capacitors at the output.

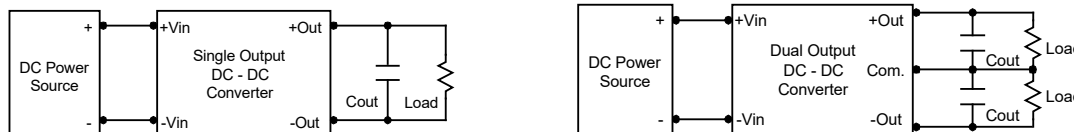


#### Maximum Capacitive Load

The MDWI03 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

#### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

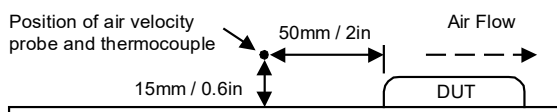

**Remote On/Off Implementation**


The positive logic remote ON/OFF control circuit is included.

Turns the module ON during logic High on the ON/Off pin and turns OFF during logic Low. The ON/OFF input signal ( $V_{on/off}$ ) that referenced to GND. If not using the remote on/off feature, please open circuit between on/off pin and  $-V_{in}$  pin to turn the module on.


The negative logic remote ON/OFF control circuit is included.

Turns the module ON during logic Low on the On/Off pin and turns OFF during logic High. The On/Off pin is an open collector/drain logic input signal ( $V_{on/off}$ ) that referenced to GND. If not using the remote on/off feature. Please short circuit between on/off pin and  $-V_{in}$  pin to turn the module on.

Remote ON/OFF implementation

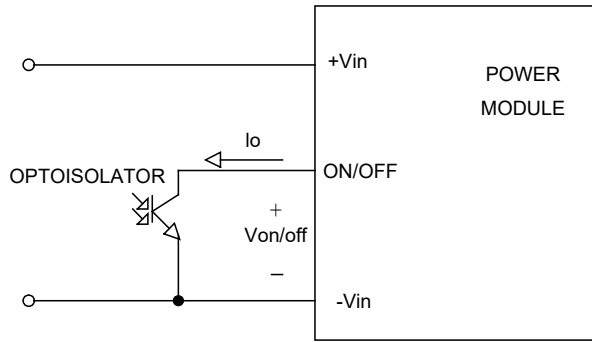


Isolated-Closure Remote ON/OFF

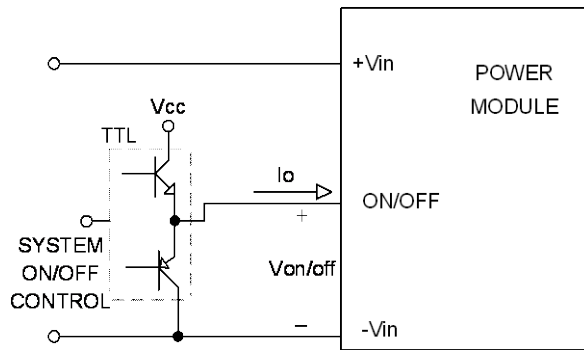

Level Control Using TTL Output


**Packaging Information**

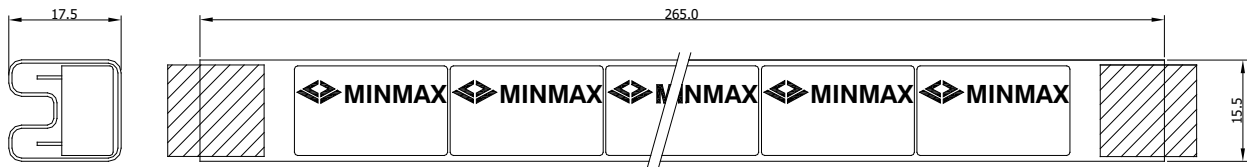

Unit: mm  
10 PCS per TUBE

**Wave Soldering Considerations**

Lead free wave solder profile

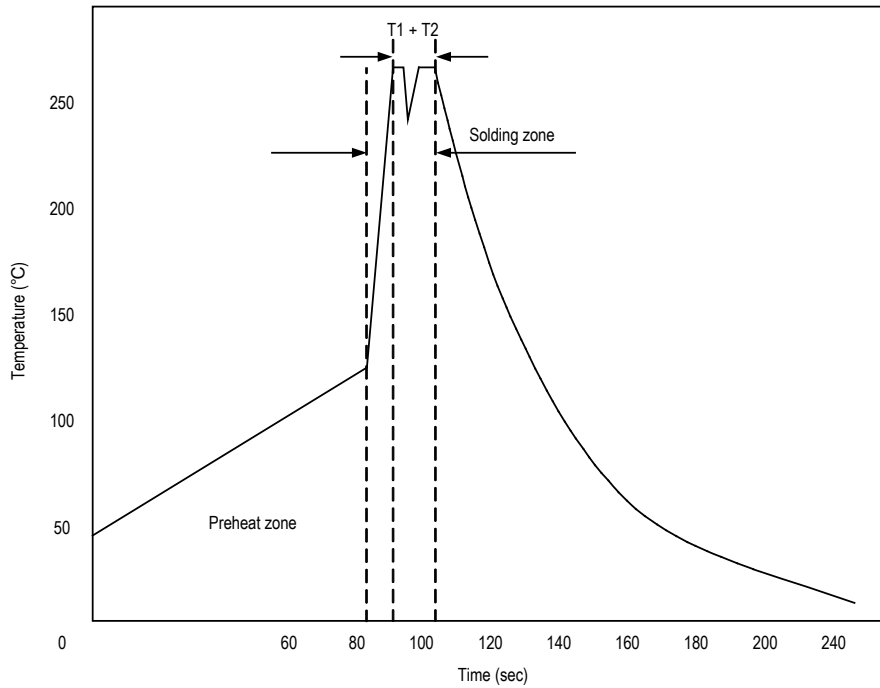

Zone	Reference Parameter
Preheat	Rise temp. speed : 3°C/sec max.
zone	Preheat temp. : 100~130°C
Actual	Peak temp. : 250~260°C
heating	Peak time(T1+T2) : 4~6 sec

**Hand Welding Parameter**

Reference Solder: Sn-Ag-Cu : Sn-Cu : Sn-Ag

Hand Welding: Soldering iron : Power 60W

Welding Time: 2~4 sec

Temp.: 380~400°C



Part Number Structure							
M	D	WI	03	-	24	S	033
Package Type DIP-16	Ultra-wide 4:1 Input Voltage Range	Output Power 3 Watt	Input Voltage Range			Output Quantity	Output Voltage
			24: 9 ~ 36 VDC		S: Single	033: 3.3 VDC	
			48: 18 ~ 75 VDC		D: Dual	05: 5 VDC	
						12: 12 VDC	
						15: 15 VDC	
						24: 24 VDC	

MTBF and Reliability		
The MTBF of MDWI03 series of DC-DC converters has been calculated using MIL-HDBK 217F NOTICE2, Operating Temperature 25°C, Ground Benign.		
Model	MTBF	Unit
MDWI03-24S033	934,667	Hours
MDWI03-24S05	932,923	
MDWI03-24S12	943,752	
MDWI03-24S15	953,834	
MDWI03-24S24	960,799	
MDWI03-24D05	931,446	
MDWI03-24D12	947,329	
MDWI03-24D15	947,329	
MDWI03-48S033	934,667	
MDWI03-48S05	937,295	
MDWI03-48S12	943,752	
MDWI03-48S15	951,203	
MDWI03-48S24	958,405	
MDWI03-48D05	936,768	
MDWI03-48D12	949,127	
MDWI03-48D15	945,180	